Designing Mobility Models based on Social Networks Theory

Mirco MusolesiCecilia Mascolom.musolesi@cs.ucl.ac.ukc.mascolo@cs.ucl.ac.ukDepartment of Computer Science, University College London, United Kingdom

Validation of mobile ad hoc network protocols relies almost exclusively on simulation. The value of the validation is, therefore, highly dependent on how realistic the movement models used in the simulations are. Since there is a very limited number of available real traces in the public domain, synthetic models for movement pattern generation must be used. However, most widely used models are currently very simplistic, their focus being ease of implementation rather than soundness of foundation. Simulation results of protocols are often based on randomly generated movement patterns and, therefore, may differ considerably from those that can be obtained by deploying the system in real scenarios. Movement is strongly affected by the needs of humans to socialise or cooperate, in one form or another. Fortunately, humans are known to associate in particular ways that can be mathematically modelled and that have been studied in social sciences for years. In this paper we propose a new mobility model founded on social network theory. The model allows collections of hosts to be grouped together in a way that is based on social relationships among the individuals. This grouping is then mapped to a topographical space, with movements influenced by the strength of social ties that may also change in time. We have validated our model with real traces by showing that the synthetic mobility traces are a very good approximation of human movement patterns. The impact of the adoption of the proposed algorithm on the performance of AODV and DSR are also presented and discussed.

I. Introduction

The definition of realistic mobility models is one of the most critical and, at the same time, difficult aspects of the simulation of applications and systems designed for mobile environments. Currently, there are very few and very recent public data banks capturing node movement in real large-scale mobile ad hoc environments.

For example, researchers at Intel Research Laboratory in Cambridge and the University of Cambridge distributed Bluetooth devices to people, in order to collect data about human movements and to study the characteristics of the co-location patterns among people. These experiments were firstly conducted among students and researchers in Cambridge [5] and then among the participants of InfoCom 2005 [10]. Other similar projects are the Wireless Topology Discovery project at the UCSD [16] and the campus-wide Wave-Lan traffic measurement and analysis exercises that have been carried out at Dartmouth College [7]. At this institution, a project with the aim of creating a repository of publicly available traces for the mobile networking community has also been started [13]. Until now, in general, real movement traces have been rarely used for evaluation and testing of protocols and systems for mobile networks, with the only exception of [24] and [9], in which the authors used, respectively, the movement traces collected from a campus scenario and direct empirical observations of the movements of pedestrians in downtown Osaka as a basis of the design of their models.

In general, synthetic models have been largely preferred [4]. The reasons of this choice are many. First of all, as mentioned, the available data are limited. Second, these traces are related to very specific scenarios and their validity is difficult to generalize. However, as we will discuss later in the paper, these data show surprising common statistical characteristics, such as the same distribution of the duration of the contacts and inter-contacts intervals. Third, the available traces do not allow for sensitivity analysis of the performance of the algorithm, since the values of the parameters that characterize the simulation scenarios, such as the distribution of the speed or the density of the hosts, cannot be varied. Finally, in some cases, it may be important to have a mathematical model that underlines the movement of the hosts in simulations,

in order to study its impact on the design of protocols and systems.

Many mobility models for the generation of synthetic traces have been presented (a survey can be found in [4]). The most widely used of such models are based on random individual movement; the simplest, the Random Walk mobility model (equivalent to Brownian motion), is used to represent pure random movements of the entities of a system [6]. A slight enhancement of this is the Random Way-Point mobility model [12], in which pauses are introduced between changes in direction or speed. More recently, a large number of more sophisticated mobility models for ad hoc network research have been presented [2, 11, 14].

However, all synthetic movement models are suspect because it is quite difficult to assess to what extent they map reality. It is not hard to see, even only with empirical observations, that the random mobility models generate behaviour that is most unhuman-like. This analysis is confirmed by the examination of the available real traces. As we will discuss later in this paper, mobility models based on random mechanisms generate traces that show properties (such as the duration of the contacts between the mobile nodes and the inter-contacts time) very distant from those extracted from real scenarios.

Our work is based on a simple observation. In mobile ad hoc networks, mobile devices are usually carried by humans, so the movement of such devices is necessarily based on human decisions and socialization behaviour. For instance, it is important to model the behaviour of individuals moving in groups and between groups, as clustering is likely in the typical ad hoc networking deployment scenarios of disaster relief teams, platoons of soldiers, groups of vehicles, etc. In order to capture this type of behaviour, we define a model for group mobility that is heavily dependent on the structure of the relationships among the people carrying the devices. Existing group mobility models fail to capture this social dimension [4].

Fortunately, in recent years, social networks have been investigated in considerable detail, both in sociology and in other areas, most notably mathematics and physics. In fact, in the recent years, various types of networks (such as the Internet, the World Wide Web and biological networks) have been investigated by researchers especially in the statistical physics community. Theoretical models have been developed to reproduce the properties of these networks, such as the so-called small worlds model proposed by Watts and Strogatz [25] or various scale-free models [18].

However, as discussed by Newman and Park

in [20], social networks appear to be fundamentally different from other types of networked systems. In particular, even if social networks present typical small-worlds behaviour in terms of the average distance between pairs of individuals (the so-called *average path length*), they show a greater level of clustering. In particular, in [20] the authors observe that the level of clustering seen in many non-social systems is no greater than in those generated using pure random models. Instead in social networks, clustering appears to be far greater than in networks based on stochastic models. The authors suggest that this is strictly related to the fact that humans usually organize themselves into *communities*.

In this paper, we propose a new mobility model that is founded on social network theory. One of the inputs of the mobility model is the social network that links the individuals carrying the mobile devices based on these results in order to generate realistic synthetic network structures [25]. The model allows collections of hosts to be grouped together in a way that is based on social relationships among the individuals. This grouping is only then mapped to a topographical space, with topography biased by the strength of social ties. The movements of the hosts are also driven by the social relationships among them. The model also allows for the definition of different types of relationships during a certain period of time (i.e., a day or a week). For instance, it might be important to be able to describe that in the morning and in the afternoon of weekdays, relationships at the workplace are more important than friendships and family one, whereas the opposite is true during the evenings and weekends.

We evaluate our model using real mobility traces provided by Intel Research Laboratory in Cambridge and we show that the model provides a good approximation of real movements in terms of some fundamental parameters, such as the distribution of the contacts duration and inter-contacts time. In particular, the data show that an approximate power law holds over a large range of values for the inter-contacts time. Instead, contacts duration distribution follows a power law for a more limited range. These characteristics of distribution are also very similar to those observed by the researchers at the University of California at San Diego and Dartmouth College [5].

The paper has the following structure: Section II shows how these results can be used to design a social network founded mobility model. Section III illustrates the results of the evaluation of the model based on the comparison with real traces; some simulation results about the impact of the proposed mo-




Figure 1: Example of social network.

bility model on the performance of the AODV and DSR protocols are also discussed. In Section IV we compare the proposed mobility model with the current state of the art. Section V concludes the paper, summarizing the original contribution of our work.

II. Design of the Mobility Model

In this section we show how we designed a mobility model which is founded on the results of social network theories briefly introduced. The description of the mobility model, mirroring its conceptual steps, is organized as follows:

- Firstly, we describe how we model social relationships and, in particular, how we use *social networks as input* of the mobility model.
- Secondly, we present the *establishment of the model*: we discuss how we identify communities and groups in the network and how the communities are associated to a geographical space. Our observation here is that people with strong social links are likely to be geographically colocated often or from time to time.
- Thirdly, we describe the algorithm that is at the basis of the *dynamics* of the nodes, that, again, is based on the strength of social relationships. We argue that individuals with strong social relationships move towards (or within) the same geographical area.
- We show the influence of the choice of the proposed mobility model on the performance of

II.A. Using Social Networks as Input of the Mobility Model

II.A.1. Modelling Social Relationships

One of the classic ways of representing social networks is *weighted graphs*. An example of social network is represented in Figure 1. Each node represents one person. The weights associated with each edge of the network is used to model the strength of the interactions between individuals [22]. It is our explicit assumption that these weights, which are expressed as a measure of the strength of social ties, can also be read as a measure of the likelihood of geographic colocation, though the relationship between these quantities is not necessarily a simple one, as will become apparent. We model the degree of social interaction between two people using a value in the range [0, 1]. 0 indicates no interaction; 1 indicates a strong social interaction. Different social networks can be valid for different parts of a day or of a week¹.

As a consequence, the network in Figure 1 can be represented by the 10×10 symmetric matrix **M** showed in Figure 2, where the names of nodes correspond to both rows and columns and are ordered alphabetically. We refer to the matrix representing the social relationships as *Interaction Matrix*.

	$ \begin{array}{c} 1 \\ 0.76 \\ 0.64 \end{array} $	$0.76 \\ 1 \\ 0.32$	$\substack{0.64\\0.32\\1}$	$\begin{array}{c} 0.11 \\ 0 \\ 0.13 \end{array}$	$0.05 \\ 0.67 \\ 0.25$	$\begin{smallmatrix}&0\\0.13\\0\end{smallmatrix}$	$\begin{smallmatrix}&0\\0.23\\0\end{smallmatrix}$	$0.12 \\ 0.45 \\ 0.15$	$0.15 \\ 0 \\ 0$	$\begin{array}{c} 0\\ 0.05\\ 0\end{array}$
M =	0.11	0	0.13	1	0.54	0.83	0.57	0	0	0
	0.05	0.67	0.25	0.54	1	0.2	0.41	0.2	0.23	0
	0	0.13	0	0.83	0.2	1	0.69	0.15	0	0
	0	0.23	0	0.57	0.41	0.69	1	0.18	0	0.12
	0.12	0.45	0.15	0	0.2	0.15	0.18	1	0.84	0.61
	0.15	0	0	0	0.23	0	0	0.84	1	0.65
	0	0.05	0	0	0	0	0.12	0.61	0.65	1

Figure 2: Example of an Interaction Matrix representing a simple social network.

The generic element $m_{i,j}$ represents the interaction between two individuals *i* and *j*. We refer to the elements of the matrix as the *interaction indicators*. The diagonal elements represent the relationships that an individual has with himself and are set, conventionally, to 1. In Figure 1, we have represented only the links associated to a weight equal to or higher than 0.25.

The matrix is symmetric since, to a first approximation, interactions can be viewed as being symmetric. However, it is worth underlining that we are using a specific measure of the strength of the relationships. It is probable that by performing psychological tests, the importance of a relationship, such as a friendship, will be valued differently by the different individuals involved; in our modelization, this would lead to an

¹Let us consider a family of three people, with one child. During the days, when the child is at school and the parents at their workplaces, their social relationship is weak (i.e., represented with low values in the matrix). During the evening, the social ties are stronger as the family members tend to be co-located (i.e., high values in the matrix). The relationship between two colleagues sharing the same office will be represented with a value higher than these family relationships during the working hours in week days.

asymmetric matrix. We plan to investigate this issue further in the future.

The Interaction Matrix is also used to generate a *Connectivity Matrix*. From matrix **M** we generate a binary matrix **C** where a 1 is placed as an entry c_{ij} if and only if $m_{i,j}$ is greater than a specific threshold t (i.e., 0.25). The Connectivity Matrix extracted by the Interaction Matrix in Figure 2 is showed in Figure 3. The idea behind this is that we have an "interaction" threshold above which we say that two people are interacting as they have a strong relationship. The In-

	Γ1	1	1	0	0	0	0	0	0	0]
	0	1	1	0	1	0	0	1	0	0
	1	1	1	0	0	0	0	0	0	0
	0	0	0	1	1	1	1	0	0	0
$\mathbf{C} =$	0	1	0	1	1	0	1	0	0	0
0 –	0	0	0	1	0	1	1	0	0	0
	0	0	0	1	1	1	1	0	0	0
	0	1	0	0	0	0	0	1	1	1
	0	0	0	0	0	0	0	1	1	1
	0	0	0	0	0	0	0	1	1	1

Figure 3: Example of a Connectivity Matrix representing a simple social network.

teraction Matrix (and, consequently, the Connectivity Matrix) can be derived by available data (for example, from a sociological investigation) or using mathematical models that are able to reproduce characteristics of real social networks. As we will discuss in Section III.B.1, the default implementation of our model uses the so-called Caveman model [25] for the generation of synthetic social networks with realistic characteristics (i.e, high clustering and low average path length). However, this is a customizable aspect and, if there are insights on the type of scenario to be tested, a user-defined matrix can be inputed.

II.A.2. Detection of Community Structures

The simulation scenario is established by mapping groups of hosts to certain areas in geographical space. After the definition of the social graph described above, groups, i.e., the highly connected set of nodes in the graph, need to be isolated. Fortunately, some algorithms can be exploited for this purpose.

We use the algorithm proposed by Newman and Girvan in [19] to detect the presence of community structures in social networks represented by matrices, like the Connectivity Matrix that we have defined in the previous section. This algorithm is based on the calculation of the so-called *betweenness* of edges. This provides a measure of the centrality of nodes. For example, considering two communities connected by few inter-community edges, all the paths through the nodes in one community to nodes in the other must traverse one of these edges, that, therefore, will be characterised by a high betweenness. Intuitively then, one of the possible estimation of the centrality of an edge is given by the number of shortest (geodesic) paths between all pairs of vertices that run along it. In other words, the average distance between the vertices of the network has the maximum increase when the nodes with the highest betweenness are removed.

Therefore, in order to extract the communities from the network, nodes characterized by high values of centrality are progressively detected in subsequent rounds. At each round, one of the edges of the host with the highest centrality is removed. The final result is a network composed of groups of hosts (i.e., the communities).

The algorithm can be run a number of times on the graph, severing more and more links and generating a number of distinguishable communities. However, we also need a mechanism to stop the algorithm when further cuts would decrease the quality of the results: this would mean that we have reached a state when we have meaningful communities already. We adopted a solution based on the calculation of an indicator defined as *modularity* Q [19]. This quantity measures the proportion of the edges in the network that connect vertices within the same community minus the expected value of the same quantity in a network with the same community division but random connections between the vertices. If the number of edges within the same community is no better than random, the value of Q is equal to 0. The maximum value of Qis 1; such a value indicates very strong community structure. In real social networks, the value of Q is usually in the range [0.3, 0.7]. The analytical definition of the modularity of a network division can be found in [19]. At each run the algorithm severs one edge and measures the value of Q. The algorithm terminates when the obtained value of Q is less than the one obtained in the previous edge removal round.

In order to illustrate this process, let us now consider the social network in Figure 1. Three communities (that can be represented by sets of hosts) are detected by running the algorithm: $C_1 = \{A, B, C\}$, $C_2 = \{D, E, F, G\}$ and $C_3 = \{H, I, L\}$. Now that the communities are identified given the matrix, there is a need to associate them with a location.

II.B. Establishment of the Model: Placement of the Communities in the Simulation Space

After the communities are identified, each of them is randomly associated to a specific location (i.e., a square) on a grid². We use the symbol $S_{p,q}$ to indicate a square in position p, q. The number of rows and columns are inputs of the mobility model.

Going back to the example, in Figure 4 we show how the communities we have identified can be placed on a 3x4 grid (the dimension of the grid is configurable by the user and influences the density of the nodes in each square). The three communities C_1, C_2 , C_3 are placed respectively in the grid in the squares $S_{a,2}, S_{c,2}$ and $S_{b,4}$.

Once the nodes are placed on the grid, the model is established and the nodes move around according to social-based attraction laws as explained in the following.

II.C. Dynamics of the Mobile Hosts

As described in the previous section, a host is initially associated to a certain square in the grid. Then, in order to drive movement, a goal is assigned to the host. More formally, we say that a host *i* is associated to a square $S_{p,q}$ if its goal is inside $S_{p,q}$. Note that host *i* is not necessarily always positioned inside the square $S_{p,q}$, despite this association (see below).

The goal is simply a point on the grid which acts as *final destination* of movement like in the Random Way-Point model, with the exception that the selection of the goal is not as random.

When the model is initially established, the goal of each host is randomly chosen inside the square associated to its community (i.e, the first goals of all the hosts of the community C_1 will be chosen inside the square $S_{a,2}$).

When a goal is reached, the new goal is chosen according to the following mechanism. A certain number of hosts (zero or more) is associated to each square $S_{p,q}$ at time t. Each square (i.e., place) exterts a certain social attractivity for a certain host. The social attractivity of a square is a measure of its importance in terms of the social relationships for the host taken into consideration. The social importance is calculated by evaluating the strength of the relationships with the hosts that are moving towards that particular square (i.e., with the hosts that have a current goal inside that particular square). More formally, given $C_{S_{p,q}}$ (i.e., the set of the hosts associated to square $S_{p,q}$), we define social attractivity of that square towards the host $i SA_{p,q_i}$, as follows

$$SA_{p,q_{i}} = \frac{\sum_{\substack{j=1\\j \in C_{S_{p,q}}}}^{n} m_{i,j}}{w}$$
(1)

where w is the cardinality of $C_{S_{p,q}}$ (i.e., the number of hosts associated to the square $S_{p,q}$). In other words, the social attractivity of a square in position (p,q) towards a host i is defined as the sum of the interaction indicators that represent the relationships between i and the other hosts that belong to that particular square, normalized by the total number of hosts associated to that square. If w = 0 (i.e., the square is empty), the value of SA_{p,q_i} is set to 0.

The mobility model allows for two alternative mechanisms for the selection of the next goal that are described in the following two subsections, a deterministic one based on the selection of the square that exterts the highest attractivity and a probabilistic one based on probability of selection of a goal in a certain square proportional to their attractivities.

Deterministic Selection of the Goal in the Area with the Highest Social Attractivity According to this mechanism, the new goal is randomly chosen inside the square characterised by the highest social attractivity; it may be again inside the same square or in a different one. New goals are chosen inside the same area when the input social network is composed by loosely connected communities (in this case, hosts associated with different communities have, in average, weak relationships between each others). On the other hand, a host may be attracted to a different square, when it has strong relationships with both communities. From a graph theory point of view, this means that the host is located between two (or more) clusters of nodes in the social network³.

Let us suppose, for example, that host A has reached its first goal inside the square $S_{a,2}$. The new goal is chosen by calculating the social attractivities of all the squares that compose the simulation space and then by choosing the highest. If, say, square $S_{c,2}$ exterts the highest attractivity (for example, because a host with strong relationship with node A has joined that community), the new goal will then be selected inside that square.

Probabilistic Selection of the Goal Proportional to the Social Attractivity An alternative mechanism

²A non random association to the particular areas of the simulation area can be devised, for example by deciding pre-defined *areas of interest* corresponding for instance to real geographical space. However, this aspect is orthogonal to the work discussed in this paper.

³This is usually the case of hosts characterised by a relatively high betweenness that, by definition, are located *between* two (or more) communities.




Figure 4: Example of initial simulation configuration.

is based on a selection of the next goal proportional to the attractivity of each square.

In other words, we assign a probability $P(s = S_{p,q_i})$ of selecting the square S_{p,q_i} as follows:

$$P(s = S_{p,q_i}) = \frac{SA_{p,q_i} + d}{\sum_{j=1}^{p \times q} (SA_{p,q_j} + d)}$$
(2)

where d is a random value greater than 1 in order to ensure that the probability of selecting a goal in a square is always different from 0^4 .

The parameter d can be used to increase the randomness of the model in the process of the selection of the new goal. This may be exploited to increase the realism of the generated scenario, since in real situations, humans also move to areas without people or for reasons not related to their social sphere.

II.D. Social Network Reconfigurations and their Effects on the Dynamics of Mobile Hosts

Like in everyone's life, the day movement are governed by different patterns of mobility which depend on the people we need to interact with. For example, most people spend a part of their day at work, interacting with colleagues, and another part at home with their families. In order to model this, we allow the association of different social networks to different periods of a simulation.

Periodically, the social networks at the basis of the mobility model can be changed. The interval of time between changes is an input of the model. When the reconfiguration of the underlying social network happens, nodes are assigned to the new communities that are detected in the network using the algorithms described in Section II.A.2. Communities are then randomly associated to squares in the simulation space. This assignement does not imply immediate relocation of the nodes, instead, it conditions the choice of the next goal. In fact, goals are chosen inside the square of the grid to which the community they belong to is assigned. So hosts will move towards their destination gradually. The nodes start moving towards the geographical region where other nodes that have strong interactions with them will converge. This mirrors the behaviour, for instance, of commuters who travel home every evening to join their families.

III. Implementation and Evaluation

In order to evaluate our model we have performed a number of tests, in particular, we have taken real mobility traces collected by Intel Research Laboratory in Cambridge. We have then tested our model using realistic social networks and compared the mobility patterns with the Intel traces. In this section, we will present and discuss the results of our simulations comparing them with these data from real scenarios.

III.A. Implementation of the model

We implemented a movement patterns generator that produce primarily traces for the ns-2 simulator [15], one of the most popular in the ad hoc network research community. However, the generator is also able to produce traces in a XML meta-format that can be parsed and trasformed into other formats (for example, by using XSLT) such as the one used by GlomoSim/Qualnet [26]. The model is available for downloading at the following URL: http://ww.cs.ucl.ac.uk/staff/m.musolesi/mobilitymodels.

III.B. Validation of the Model using Real Movement Traces

In this section, we present a comparison of the properties of the movement patterns generated by our mobility model with those of the real traces provided by Intel Research Laboratory in Cambridge. The description of these measurement exercise is presented in [5]. In that paper, the authors also compare their results with other publicly available data sets provided by McNett and Voelker from University of California at San Diego [16] and by Henderson et alii from Dartmouth College [7] showing evident similarities between the patterns movements collected by the three different groups. For this reason, we decided to compare the traces obtained by using our mobility model

 $^{^{4}}d$ has a role similar to the *damping factor* used in the calculation of the PageRank [3]. In fact, the transitions between squares can also be represented using a Markov Chain model with $P(s = S_{p,q_i})$ as probability of transitions between states (squares).




Figure 5: Generation of the social network in input using the Caveman model: (a) initial configuration with 3 disconnected 'caves'. (b) generated social network after the rewiring process.

only with the data provided by the researchers in Cambridge.

III.B.1. Description of the Simulation

We tested our mobility model using several runs generating different mobile scenarios and we compared the results with the real movement patterns provided by Intel and synthetic traces generated using a Random Way-Point model.

We tested our model considering a scenario composed of 100 hosts in a simulation area of $5 \ km \times 5 \ km$, divided into a grid composed of 625 squares of 200 m (i.e., the numbers of rows and columns of the grid were set to 25). We chose a relatively large simulation scenario, with a low population density, in order to better see the differences in the results obtained with a Random Way-Point model. In fact, in small simulation areas, the limited possible movements and the higher probability of having two nodes in the same transmission range may affect the simulation results introducing side-effects that are not entirely due to the mobility model.

We also assumed that each device is equipped with an omnidirectional antenna with a transmission range of 250 m, modeled using a free space propagation model. The speeds of the nodes were randomly generated according to a uniform distribution in the range [1-6] m/s. The duration of the simulation is one day and the reconfiguration interval is equal to 8 hours. These values have not been chosen to reproduce the movements described by the traces provided by Intel, rather, we were more interested in observing if similar patterns could be detected in synthetic and real traces. In other words, our goal has mainly been to verify whether the movement patterns observed in Intel traces were reproduced by our mobility model.

A key aspect of the initialization of our model is the selection of the social network in input. We implemented a generator of synthetic social networks using the so-called Caveman Model proposed by Watts [25]. The social network is built starting from K fully con-

nected graphs (representing communities living in isolation, like primitive men in caves). According to this model, every edge of the initial network in input is re-wired to point to a node of another cave with a certain probability p. The re-wiring process is used to represent random interconnections between the communities. Figure 5.a shows an initial network configuration composed by 3 disconnected communities (*caves*) composed by 5 individuals; a possible social network after random rewiring is represented in Figure 5.b.

Individuals of one cave are closely connected, whereas populations belonging to different caves are sparsely connected. Therefore, the social networks generated using this model are characterized by a high clustering coefficient and low average path length. It has been proved that this model is able to reproduce social structures very close to real ones [25]. We generated social networks with different rewiring probabilities, also considering the case of disconnected communities (i.e., p = 0).

We also implemented a movement patterns generator based on the Random Way-Point model. We generated traces with the same simulation scenarios in terms of size of the area and characteristics of the mobile devices, with hosts that move with a speed uniformly distributed in the range [1 - 6] m/s and stop time equal to [1 - 10] m/s. We repeated the experiments using a number of runs sufficient to achieve a 10% confidence interval.

III.B.2. Simulation Results

The emergent structure of the network derived by analyzing the Intel traces is typically exponential [1]; in fact, the degree of connectivity shows a local peak near the average. Our mobility model (indicated with CM) produces a similar type of distribution as shown in Figure 6. The peak shifts to the right as the density of the squares increases. We analyzed two further properties of the movement patterns, the contact duration and the inter-contacts time. We adopt the same definitions used by the authors of [5] in order to be able compare the results. We define contact duration as the time interval in which two devices are in radio range. We define inter-contacts time as the time interval between two contacts. These indicators are particularly important in ad hoc networking and, in particular, in opportunistic mobile networks, such as delay tolerant mobile ad hoc networks [17]: inter-contacts times define the frequency and the probability of being in contact with the recipient of a packet or a potential carrier in a given time period.

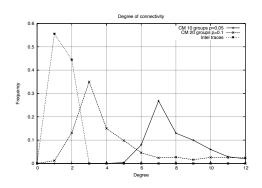


Figure 6: Distribution of the degree of connectivity.

Figure 7 shows the comparison between the intercontacts time and the contact duration cumulative distributions⁵ using log-log coordinates. These distributions are extracted from the real and synthetic traces generated by the Random Way-Point (indicated with RWP) and our Community based mobility model with different rewiring probabilities p.

With respect to the inter-contacts time, our traces (excluding the case with p = 0 that we will discuss separately) shows an approximate power law behaviour for a large range of values like those extracted from Intel data. A similar pattern can be observed in UCSD and Dartmouth traces [5]. The cumulative distribution related to Random Way-Point, instead, shows a typical exponential distribution. The same behaviour can be observed for the traces generated using our Community based mobility model with a probability of rewiring equal to 0. In fact, in this case, the only movements of the hosts outside the assigned square happen when a reconfiguration takes place (i.e., a new generation of the social networks takes place and a consequent new assignment to different squares in the grid are performed). However, the case of disconnected and isolated communities is not so realistic. As far as the contacts time distribution is concerned, we observe a power law behaviour for a much more limited range of values and, in general, with a lower angular coefficient of the interpolating line. The traces from Dartmouth College and UCSD also show a power law distribution with different angular coefficients [5]. It seems that data related to different scenarios are characterized by different types of power law distribution.

By plotting the same distributions using semi-log coordinates (see Figure 8), the differences between the curves corresponding to real traces and those generated using the Random Way-Point mobility model are even more evident. The exponential nature of the cumulative distribution of the inter-contacts time⁶ extracted by the latter is clearly reflected by the approximated straight line that is shown in the figure.

Figure 9.a and 9.b show the influence of the speed respectively on the cumulative distributions of the inter-contacts time and contacts duration. We simulated scenarios with host speed uniformly distributed in the range [1 - 6], [1 - 10] and [1 - 20]m/s. The cumulative distributions related to all these scenario can be approximated with a power law function for a wide range of values.

In many of our experiments, the coefficient of the power law of the distribution of the Intel traces is different from those related to synthetic traces generated using our model. Different coefficients can be observed in the available sets of real traces. In a sense, it seems that the values of these coefficients characterize the various mobile settings. It is worth noting that currently there are not available theoretical models that justify the emergence of these distributions.

The impact of the density of the population in the simulation scenario is presented in Figure 10. We simulated scenarios composed of 100, 200, 300 nodes with a starting number of groups for the Caveman model, respectively equal to 10, 20, 30, and a rewiring probability of 0.2. Also in these scenarios, the intercontacts time and contacts duration distributions follow a similar pattern. As discussed previously, our aim was not to exactly reproduce the traces provided by Intel. However, quite interestingly, we observe that the inter-contacts time distribution lie in between the curves representing the scenario composed of 100 and 200 nodes. The number of nodes recorded in the Intel experiments was in fact 140. Instead, the contacts duration distribution is bounded by the curves extracted by these two synthetic traces for a smaller range of values. Finally, in Figure 11 we consider a scenario composed of 100 hosts connected by a social network generated using different initial numbers of groups (i.e., caves) as input for the Caveman model (with a re-wiring probability equal to 0.1). By varying the number of groups, the density of the squares of the grid changes. The power law patterns can be observed in all the scenario, also with a large number of small initial groups.

⁵Cumulative distributions are generally used instead of frequency distributions to avoid the issues related to the choice of the bins of the plot. It is possible to prove that if a set of data shows a power law behaviour using a frequency histogram, its cumulative distribution also follows the same pattern.

⁶This behaviour has been theoretically studied and predicted by Sharma and Mazumdar in [23].

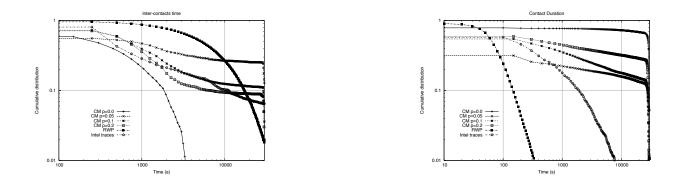


Figure 7: Comparison between synthetic and real traces (log-log coordinates) : (a) cumulative distribution of inter-contacts time in seconds; (b) cumulative distribution of contacts duration in seconds.

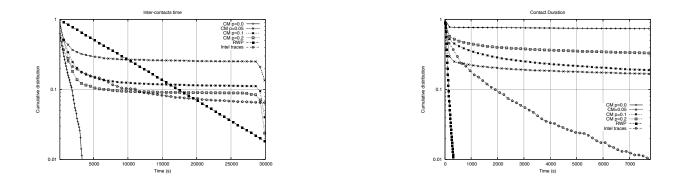


Figure 8: Comparison between synthetic and real traces (semi-log coordinates): (a) cumulative distribution of inter-contacts time in seconds; (b) cumulative distribution of contacts duration in seconds.

III.C. Influence of the Choice of the Mobility Model on Routing Protocols Performance

III.C.1. Simulation Description

In order to be able to compare routing protocol performance with exisiting results, we tested the community model in case of dense networks. Using ns-2, we simulated a scenario composed of 50 hosts and we compared the performance in terms of delivery ratio of the AODV [21] and DSR [12] protocols. We used a $1000m \times 1000m$ simulation area with a maximum node transmission range equal to 250m. We chose the two-ray pathloss model as propagation model and at the MAC layer, the IEEE 802.11 DCF protocol was used with a bandwidth equal to 2 Mbps. We started 10 sessions between randomly chosen hosts⁷ using CBR traffic with data packet size and sending rate respectively equal to 512 bytes and 4 packets/second. The simulation time was equal to 2 hours.

We studied the influence of the speed on the performance comparing the results obtained by using the Random Way-Point model and the Community based mobility model presented in this paper. Every node in the simulation is moving at the same speed. With respect to the Random Way-Point model, the stopping times are chosen randomly in the interval [1-10]m/s. As far as our mobility model is concerned, the reconfiguration interval was set to 1 hour. The social network in input was generated with the Caveman model with 5 groups of 10 individuals and a re-wiring probability equal to 0.1. The simulation scenario was divided into a 5×5 grid. We performed a number of runs sufficient to achieve a 10% confidence interval.

III.C.2. Simulation Results

Using the Random Way-Point mobility model, as expected and confirming the results obtained by the authors of these protocols [21, 12], the delivery ratio de-

⁷This kind of traffic can be considered as a worst case scenario; in reality, it is probable that sessions will be between hosts of the same community. We plan to investigate this aspect in the future, developing a social networks founded traffic generator.

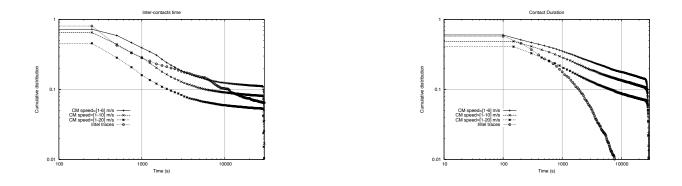


Figure 9: Influence of the hosts speed: (a) cumulative distribution of inter-contacts time in seconds; (b) cumulative distribution of contacts duration in seconds.

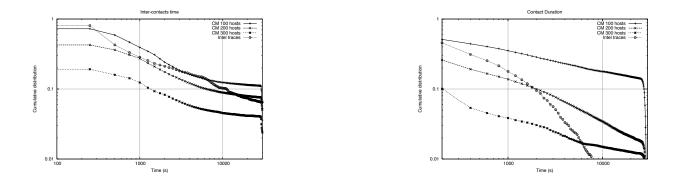


Figure 10: Influence of the density of population: (a) cumulative distribution of inter-contacts time in seconds; (b) cumulative distribution of contacts duration in seconds.

creases as the speed increases (Figure 12). Instead, using our model, the decreasing trend of the delivery ratio is less evident, since the emerging structure is composed of groups of hosts moving in limited areas (i.e., the square of the grids) that are 'bridged' by hosts roaming among them. In other words, the movement of most of the hosts is constrained in geographical terms so topology changes are less frequent than in the case of a pure random model. As it is possible to observe in Figure 12, the difference in terms of performance using the two mobility models is more evident for the DSR protocol. In case of fixed hosts (i.e., with a speed equal to 0), the delivery ratio that we obtained using our mobility model is lower than in the scenarios with a speed greater than 0, since in the former case, there may be disconnected communities, whereas in the latter, hosts move between communities, providing a link between them.

IV. Related Work

Many mobility models have been presented with the aim of allowing scalability testing of protocols and algorithms for mobile ad hoc networking. A comprehensive review of the most popular mobility models used by the mobile ad hoc research community can be found in [4]. However, it is interesting and, at the same time, surprising to note that even the best solutions and approaches have only been tested using completely random models such as the Random Way-Point model, without grouping mechanisms.

The work most directly related to ours can be found in [8]. This model is predicated upon similar assumptions, but is considerably more limited in scope. In that model hosts are statically assigned to a particular group during the initial configuration process, whereas our model accounts for movement between groups. Moreover, the authors claim that mobile ad hoc networks are scale-free, but the typical properties of scale-free networks are not exploited in the design of the model presented by the authors. With respect to

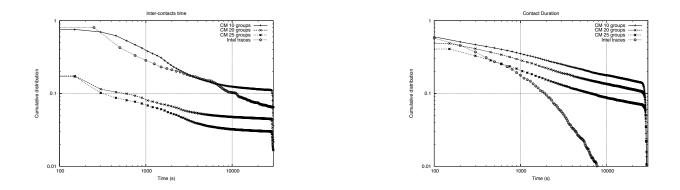


Figure 11: Influence of the number of initial number of groups in input to the network generator based on the Caveman model: (a) cumulative distribution of inter-contacts time in seconds; (b) cumulative distribution of contacts duration in seconds.

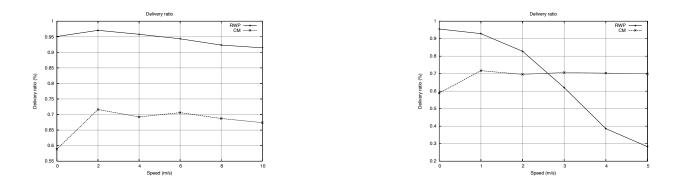


Figure 12: Influence of the mobility model on the protocol performance (delivery ratio vs speed): (a) AODV; (b) DSR.

this work, we allow the setting of the initial social network, which conditions the movement patterns, this enables different kinds of networks to emerge, including small world and scale free.

In recent years, many researchers have tried to refine existing models in order to make them more realistic. In [11], a technique for the creation of a mobility models that include the presence of obstacles is presented. The specification of obstacles is based on the use of Voronoi graphs in order to derive the possible pathways in the simulation space. This approach is orthogonal to ours; this would be an interesting extension of the model as discussed in the next section.

Tuduce and Gross in [24] present a mobility model based on real data from the campus wireless LAN at ETH in Zurich. They use a simulation area divided into squares and derive the probability of transitions between adjacent squares from the data of the access points. Also in this case, the session duration data follow a power law distribution. This approach can be a refined version of the Weighted Way-Point Mobility Model [9], based on the probability of moving between different areas of a campus using a Markov model. Moreover, Tuduce and Gross' model represents the movements of the devices in an infrastructure-based network and not ad hoc settings. In [14], the authors try to reproduce the movements of pedestrians in downtown Osaka by analysing the characteristics of the crowd in subsequent instants of time and maps of the city using an empirical methodology. In general, the main goal of these works is to try to reproduce the specific scenarios with a high degree of accuracy. We focus, instead, on the cause of these movements, trying to capture the social dimensions that lead to general emergent human movement patterns.

V. Conclusions

We have presented a new mobility model based on social network theory and predicated on the assump-

tion that mobility patterns are driven by the fact that devices are carried by humans and that the movements are strongly affected by the relationships between them.

We have described the generation of the mobility model, its implementation and an evaluation based on the comparison between our approach, existing random mobility models and real movement traces. We have shown that our mobility model generates traces that present characteristics similar to real ones, in terms of inter-contacts time and contacts duration. Finally, we have also compared the performance in terms of delivery ratio of the AODV and DSR protocols using the Random Way-Point model and our Community based model.

Acknowledgements: we would like to thank the support of the EPSRC Research Council through project CREAM and the European Project RUNES.

References

- R. Albert and A.-L. Barabasi. Statistical mechanics of complex networks. *Review of Modern Physics*, 74:47–97, 2002.
- [2] J.-Y. L. Boudec and M. Vojnovic. Perfect simulation and stationarity of a class of mobility models. In *Proceedings of IEEE INFOCOM*'05, pages 72–79, March 2005.
- [3] S. Brin and L. Page. The anatomy of a large-scale hypertextual web search engine. In *Proceedings of the 7th International Conference on World Wide Web*, pages 107–117, April 1998.
- [4] T. Camp, J. Boleng, and V. Davies. A survey of mobility models for ad hoc network research. *Wireless Communication and Mobile Computing Special Issue on Mobile Ad Hoc Networking: Research, Trends and Applications*, 2(5):483– 502, 2002.
- [5] A. Chaintreau, P. Hui, J. Crowcroft, C. Diot, R. Gass, and J. Scott. Pocket Switched Networks: Real-world mobility and its consequences for opportunistic forwarding. Technical Report UCAM-CL-TR-617, University of Cambridge, Computer Laboratory, February 2005.
- [6] A. Einstein. *Investigations on the Theory of the Brownian Movement*. Dover Publications, 1956.
- [7] T. Henderson, D. Kotz, and I. Abyzov. The changing usage of a mature campus-wide wireless network. In *Proceedings* of ACM MobiCom'04, pages 187–201, 2004.
- [8] K. Hermann. Modeling the sociological aspect of mobility in ad hoc networks. In *Proceedings of MSWiM'03*, pages 128–129, San Diego, California, USA, September 2003.
- [9] W. Hsu, K. Merchant, H. Shu, C. Hsu, and A. Helmy. Weighted Waypoint Mobility Model and its Impact on Ad Hoc Networks. ACM Mobile Computer Communications Review (MC2R), pages 59–63, January 2005.
- [10] P. Hui, A. Chaintreau, J. Scott, R. Gass, J. Crowcroft, and C. Diot. Pockets Switched Networks and Human Mobility in Conference Environments. In *Proceedings of ACM SIG-COMM'05 Workshops*, pages 244–251, August 2005.

- [11] A. Jardosh, E. M. Belding-Royer, K. C. Almeroth, and S. Suri. Real world Environment Models for Mobile Ad hoc Networks. *IEEE Journal on Special Areas in Communications - Special Issue on Wireless Ad hoc Networks*, 23(3), March 2005.
- [12] D. B. Johnson and D. A. Maltz. Dynamic source routing in ad hoc wireless network. In T. Imielinski and H. Korth, editors, *Mobile Computing*, chapter 5, pages 153–181. Kluwer Academics Publisher, 1996.
- [13] D. Kotz and T. Henderson. CRAWDAD: A Community Resource for Archiving Wireless Data at Dartmouth. *IEEE Pervasive Computing*, 4(4):12–14, October-December 2005.
- [14] K. Maeda, K. Sato, K. Konishi, A. Yamasaki, A. Uchiyama, H. Yamaguchi, K. Yasumotoy, and T. Higashino. Getting urban pedestrian flow from simple observation: Realistic mobility generation in wireless network simulation. In *Proceedings of MSWiM'05*, pages 151–158, September 2005.
- [15] S. McCanne and S. Floyd. ns-2 network simulator. http://www.isi.edu/nsnam/ns/.
- [16] M. McNett and G. M. Voelker. Access and Mobility of Wireless PDA User. *Mobile Computing Communications Review*, 9(2):40–55, April 2005.
- [17] M. Musolesi, S. Hailes, and C. Mascolo. Adaptive routing for intermittently connected mobile ad hoc networks. In *Proceedings of WoWMoM 2005. Taormina, Italy.* IEEE press, June 2005.
- [18] M. E. J. Newman. The structure and function of complex networks. *SIAM Review*, 19(1):1–42, 2003.
- [19] M. E. J. Newman and M. Girvan. Finding and evaluating community structure in networks. *Physical Review E*, 69, February 2004.
- [20] M. E. J. Newman and J. Park. Why Social Networks are Different from Other Types of Networks. *Physical Review E*, 68, 2003.
- [21] C. E. Perkins and E. M. Royer. Ad hoc on-demand distance vector routing. In *Proceedings of the 2nd IEEE Workshop* on Mobile Computing Systems and Applications, pages 90– 100, February 1999.
- [22] J. Scott. *Social Networks Analysis: A Handbook.* Sage Publications, London, United Kingdom, second edition, 2000.
- [23] G. Sharma and R. R. Mazumdar. Scaling laws for capacity and delay in wireless ad hoc networks with random mobility. In *IEEE International Conference on Communications* (*ICC'04*), pages 3869–3873, June 2004.
- [24] C. Tuduce and T. Gross. A Mobility Model Based on WLAN Traces and its Validation. In *Proceedings of IN-FOCOM'05*, pages 19–24, March 2005.
- [25] D. J. Watts. Small Worlds The Dynamics of Networks between Order and Randomness. Princeton Studies on Complexity. Princeton University Press, 1999.
- [26] X. Zeng, R. Bagrodia, and M. Gerla. Glomosim: A library for parallel simulation of large-scale wireless networks. In *Workshop on Parallel and Distributed Simulation*, pages 154–161, 1998.