

Mobile and Sensor Systems

Lecture 5: Sensor Network Routing

Dr Cecilia Mascolo

In this lecture

- We will introduce sensor network routing protocols, in particular:
 - Directed diffusion
 - MINT routing
 - GPSR

What's in this Lecture

- We will discuss network layer protocols for sensor networks.
- Also we will illustrate aspects of data gathering and aggregation.

Network Protocols

- Can we apply ad hoc networks protocols?
- Yes protocols like epidemic can be applied but overhead is an issue.
- Aims are usually different: not communication but data reporting to single or multiple source.
- Specific protocols have been devised.
- Specific nodes are interested in specific events:
 - Sink interested in all results;
 - Sink interested in a sensor reading change.

Protocols for Repeated interactions


- Subscribe once, events happen multiple times:
 - Exploring the network topology might actually pay off. But: unknown which node can provide data, multiple nodes might ask for data.
- ! How to map this onto a “routing” problem?
- Put enough information into the network: publications and subscriptions can be mapped onto each other. But try to avoid using unique identifiers: might not be available, might require too big a state size in intermediate nodes.

Directed Diffusion

- **Directed diffusion** as one option for implementation:
 - Try to rely only on **local interactions**.
 - Data-centric approach.
- Nodes send “interests” for data which are diffused in the network.
- Sensors produce data which is routed according to interests.
- Intermediate nodes can filter/aggregate data.

Interest Propagation

- Each sink sends expression of interests to neighbours.
- Each node will store interests and disseminate those further to their neighbours.
 - Cache of interest is checked not to repeat disseminations.
- Interests need refreshing from the sink (they time out).
- Interests have a “rate of events” which is defined as **“gradient”**.

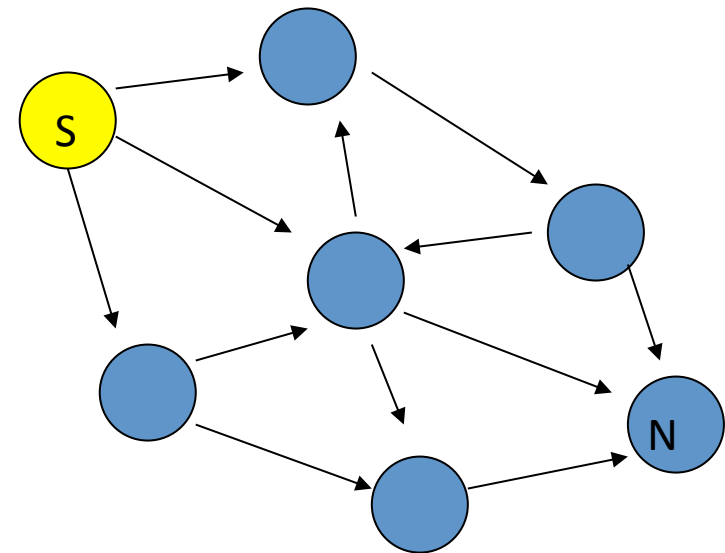

Data delivery



- Sensor data sources emit events which are sent to neighbours according to interest (ie if there is a gradient).
- Each intermediate node sends back data at a rate which depends on the gradient.
 - Ie if gradient is 1 event per second and 2 events per second are received send either the first or a combination of the two (aggregation).

Gradients Reinforcement

- Events are stored to avoid cycles (check if same event received before).
- Data can reach a node through different paths.
Gradient reinforcement needed.
- When gradients are established the rate is defined provisionally (usually low). Sinks will ‘reinforce’ good paths which will be followed with higher rate.
- A path expires after a timeout so if not reinforced it will cease to exist. This allows adaptation to changes and failures.

Directed diffusion – Two-phase pull

- **Phase I:** nodes distribute **interests** in certain kinds of named data:
 - Specified as attribute-value pairs
- Interests are flooded in the network.
 - Apparently obvious solution: remember from where interests came, set up a “tree”.
 - Problem: Node X cannot distinguish, in absence of unique identifiers, between the two situations on the right – set up only one or three trees?

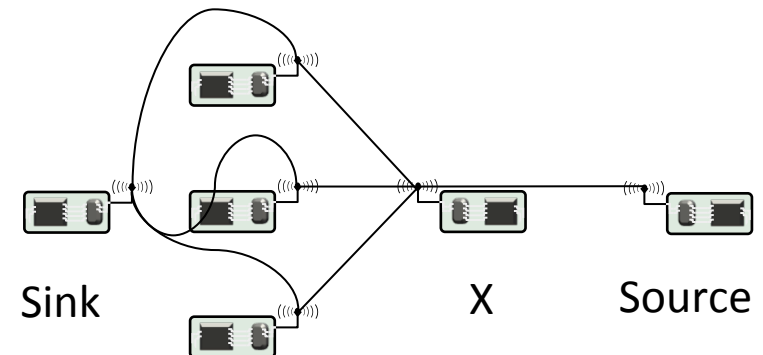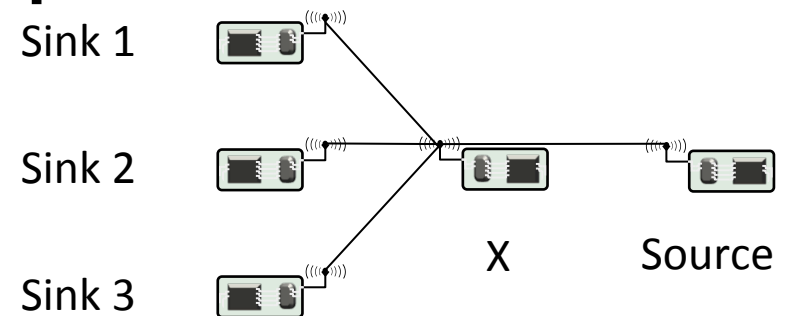

Direction diffusion

Gradients in two-phase pull

- Option 1: Node X forwarding received data to all “parents” in a “tree”: Not attractive, many needless packet repetitions over multiple routes.
- Option 2: node X only forwards to one parent. Not acceptable, data sinks might miss events.
- Option 3: Only provisionally send data to all parents, but ask data sinks to help in selecting which paths are redundant, which are needed.
 - Information from where an interest came is called **gradient**.
 - Forward all published data along all existing gradients

Directed diffusion – extensions


- Problem: Interests are flooded through the network.
- Geographic scoping & directed diffusion: Interest in data from specific areas should be sent to sources in specific geo locations only.
- Push diffusion – few senders, many receivers: Same interface/naming concept, but different routing protocol. Here: do not flood interests, but flood the (relatively few) data. Interested nodes will start reinforcing the gradients.

Issues

- Purely theoretical work.
- Apart from the flooding of the interests...No consideration of real world issues such as link stability or link load and load dependence.
- Mac Layer issues (assume nodes are awake...or does not discuss it).
- More recent approaches have considered link capabilities more explicitly as part of the routing decision making.

Data aggregation

- Less packets transmitted -> less energy used
- To still transmit data, packets need to combine their data into fewer packets ! **aggregation** is needed
- Depending on network, aggregation can be useful or pointless
- Directed diffusion gradient might require some data aggregation

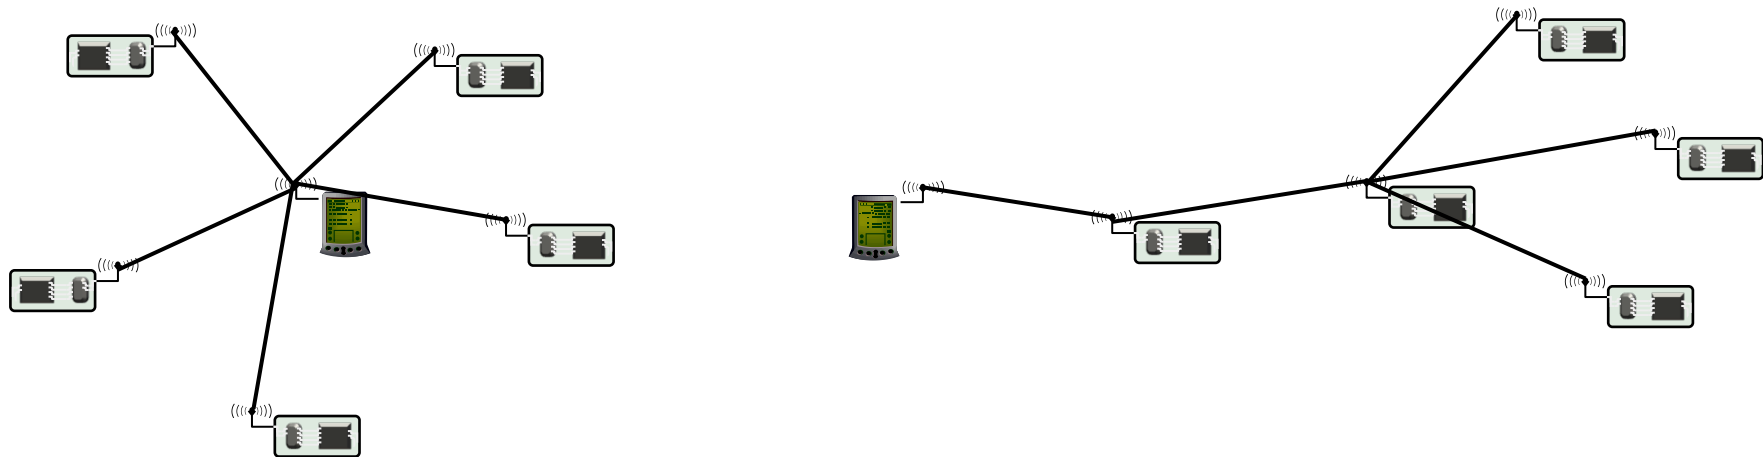

Metrics for data aggregation


- **Accuracy:** Difference between value(s) the sink obtains from aggregated packets and from the actual value (obtained in case no aggregation/no faults occur)
- **Completeness:** Percentage of all readings included in computing the final aggregate at the sink
- **Latency**
- **Message overhead**

Link quality based routing

- Directed diffusion uses some sort of implicit ways to indicate which are the good links.
 - Through the gradient.
- Ad hoc routing protocols for mobile networks route messages based on shorter path in terms of number of hops.
- The essence of the next protocol we present: “number of hops might not be the best performance indication in wireless sensor network”.

Routing based on Link Estimation

- Routing algorithms should take into account underlying network factors and under realistic loads.
- Link connectivity in reality is not spherical as often assumed.

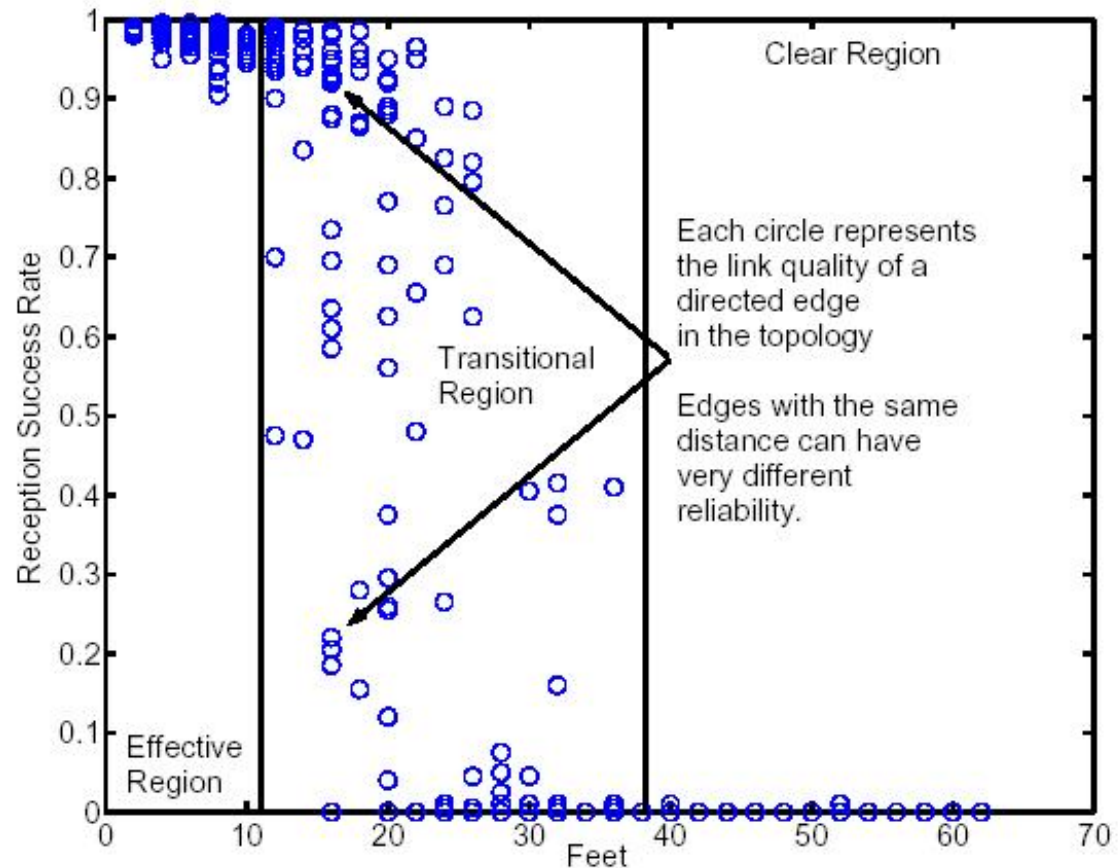


Link Estimation

- A good estimator in this setting must:
 - Be stable.
 - Be simple to compute and have a low memory footprint.
 - React quickly to large changes in quality.
 - Neighbour broadcast can be used to passively estimate.

WMEWMA

- Snooping
 - Track the sequence numbers of the packets from each source to infer losses
- Window mean with EWMA
 - $MA(t) = (\# \text{packets received in } t) / \max(\# \text{packets expected in } t, \text{ packets received in } t)$
 - $EWMA(t_x) = a (MA(t_x)) + (1-a)EWMA(t_{(x-1)})$
 - t_x : last time interval; a: weight

WMEWA ($t = 30, a = 0.6$)

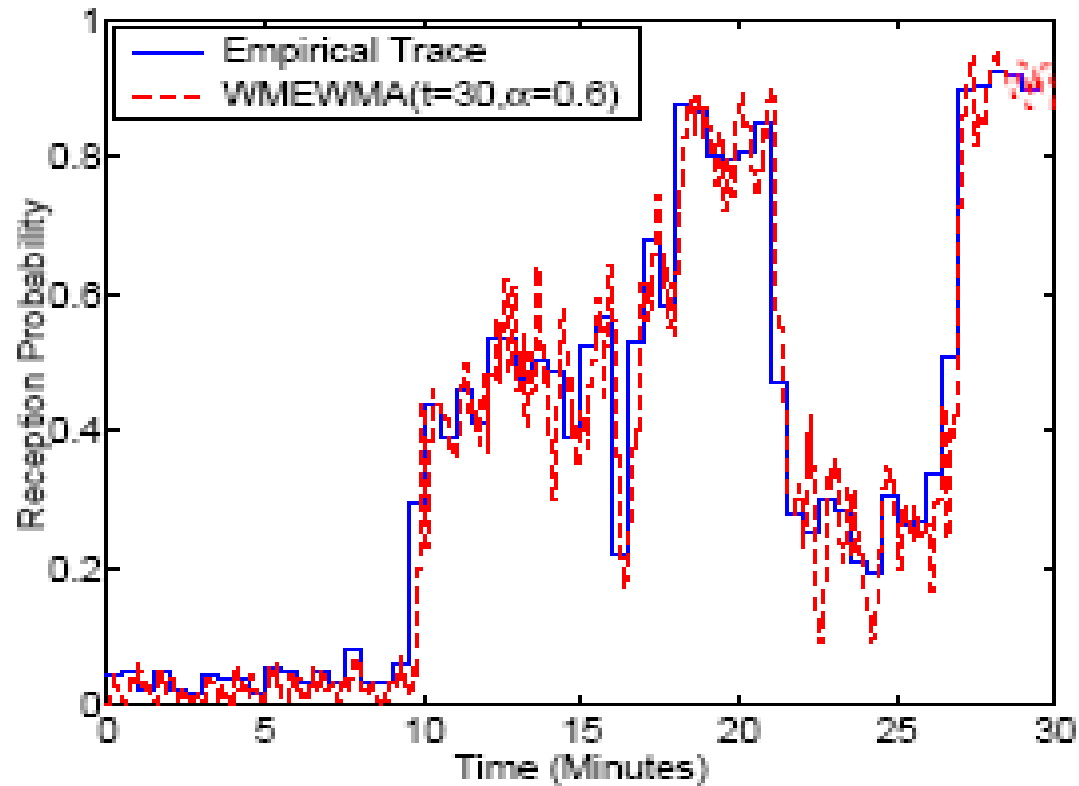

Neighborhood Management

- Neighborhood table:
 - Record information about nodes from which it receives packets (also through snooping).
- If network is dense, how does a node determine which nodes it should keep in the table?
- Keep a sufficient number of good neighbours in the table.

Link Estimation based Routing

- Focus on “many to one” routing model:
 - Information flows one way.
- Estimates of inbound links are maintained, however outbound links need to be used!
 - Propagation back to neighbours.
- Each node selects a parent (using the link estimation table).
 - Changes when link deteriorates (periodically).


Distance vector routing: cost metrics

- Routing works as a standard distance vector routing.
- The DVR cost metric is usually the hop count.
- In lossy networks hop count might underestimate costs.
 - Retransmissions on bad links: shortest path with bad links might be worse than longer path with good links.
 - Solution: consider the cost of retransmission on the whole path.

MIN-T Route

- MT (Minimum Transmission) metric:
 - Expected number of transmissions along the path.
 - For each link, MT cost is estimated by $1/(\text{Forward link quality}) * 1/(\text{Backward link quality})$.
 - backward links are important for acks.
- Use DVR with the usual hop counts and MT weights on links.

An Example

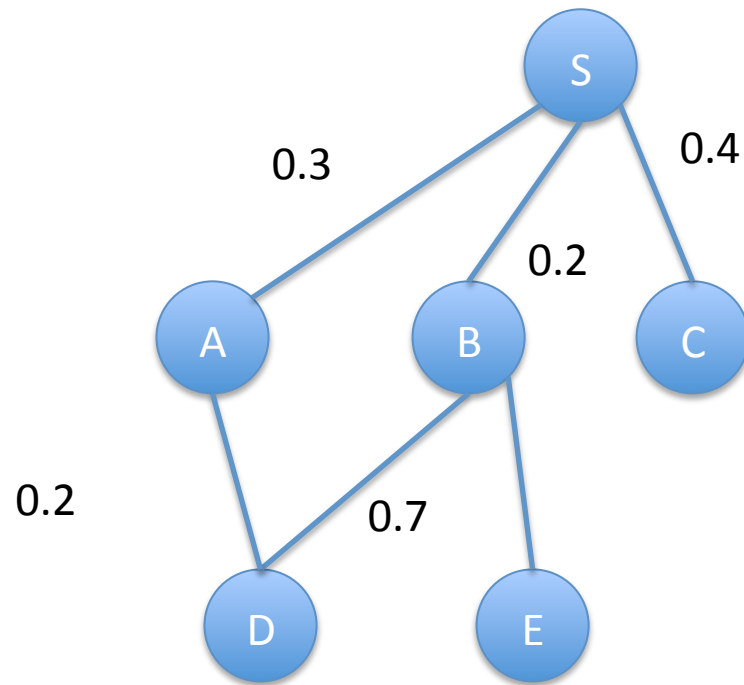

Routing Table on D:

Id	Cost	NextHop
----	------	---------

A	0.2	A
---	-----	---

B	0.7	B
---	-----	---


S	0.5	A
---	-----	---

Greedy Perimeter Stateless Routing (GPSR)

- Another possible routing protocol with different applications is geographical: it assumes the node knows their geographical position and that of the other nodes.

Greedy Perimeter Stateless Routing (GPSR)

- The algorithm consists of two methods for forwarding packets:
- *greedy forwarding*, which is used wherever possible, and
- *perimeter forwarding*, which is used in the regions greedy forwarding cannot be.

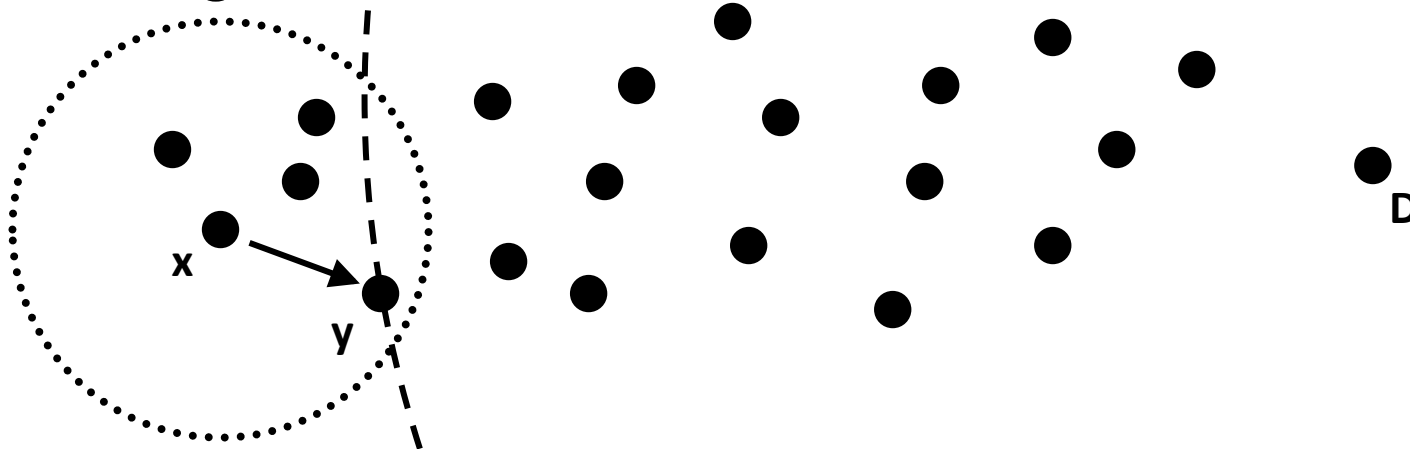


Greedy Forwarding

- Under GPSR, packets are marked by their originator with their destinations' locations.
- A forwarding node can make a locally optimal, greedy choice in choosing a packet's next hop.
- Specifically, if a node knows its neighbors' positions, the locally optimal choice of next hop is the neighbor geographically closest to the packet's destination.
- Forwarding in this regime follows successively closer geographic hops, until the destination is reached.

Greedy Forwarding Failure

Greedy forwarding not always possible! Consider:

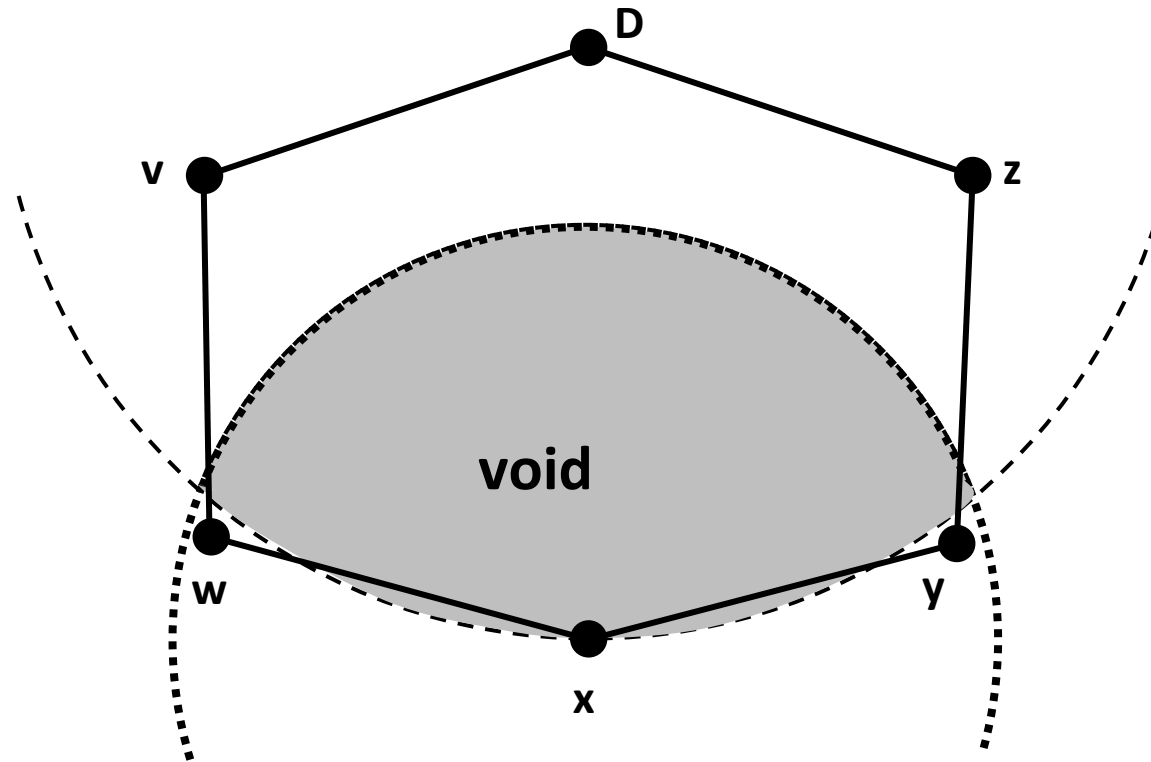


Void Traversal: The Right-hand Rule

Well-known graph traversal: **right-hand rule**

Requires **only neighbors' positions**


- Mapping perimeters by sending packets on tours of them, using the right-hand rule.
- This approach requires the no-crossing heuristic, to force the right-hand rule to find perimeters that enclose voids in regions where edges of the graph cross.
- Caveat: if the graph has cross cutting edges:
 - Remove those with a specific procedure.

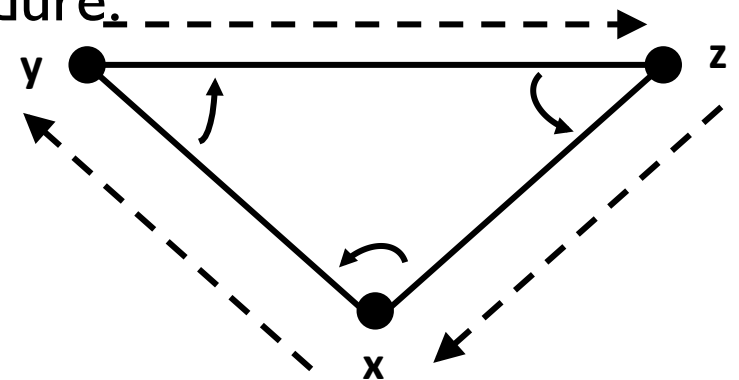

GPSR

- All packets begin in greedy mode. Upon greedy failure, node marks its location in packet, marks packet in perimeter mode.
- Perimeter mode: follow planar graph traversal.
 - Forward along successively closer faces by right-hand rule, until reaching destination.
 - Packets return to greedy mode upon reaching node closer to destination than perimeter mode entry point.

Perimeter Mode

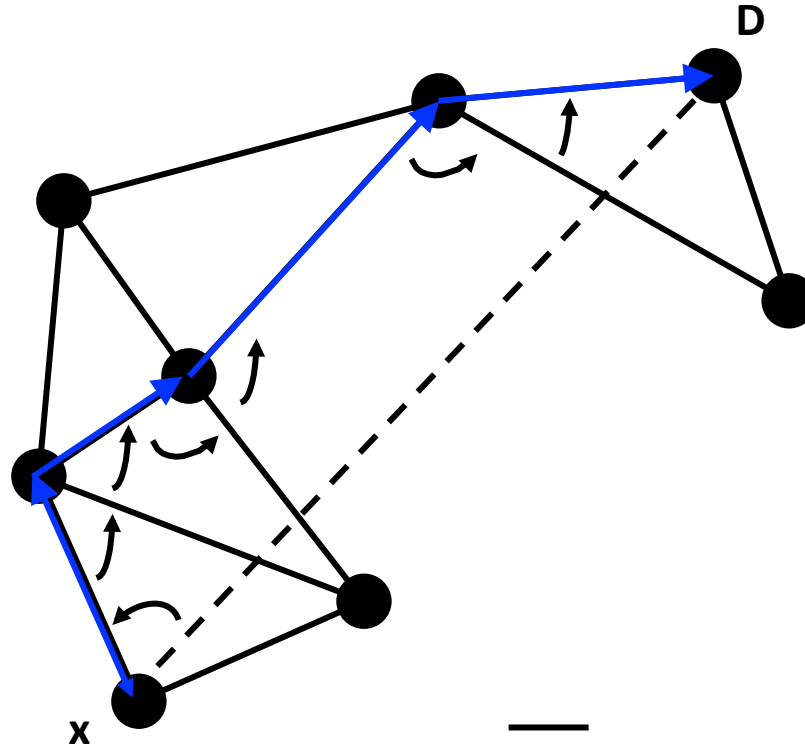

- Traverse face closer to D along \overline{xD} by right-hand rule, until crossing \overline{xD} .
- Repeat with next-closer face etc.

GPSR comments

- No consideration for 3D terrain
- It needs to be augmented with power efficient MAC layers.
- Knowing position is not common in all applications and may require expensive sensors.

References

- Intanagonwiwat, C., Govindan, R., and Estrin, D. 2000. Directed diffusion: a scalable and robust communication paradigm for sensor networks. In Proceedings of the 6th Annual international Conference on Mobile Computing and Networking (Boston, Massachusetts, United States, August 06 - 11, 2000). MobiCom '00. ACM, New York, NY, 56-67.
- Woo, A., Tong, T., and Culler, D. 2003. Taming the underlying challenges of reliable multihop routing in sensor networks. In *Proceedings of the 1st international Conference on Embedded Networked Sensor Systems* (Los Angeles, California, USA, November 05 - 07, 2003). SenSys '03. ACM, New York, NY. Pages: 14-27. Karp, B. and Kung, H.T., GPSR: Greedy Perimeter Stateless Routing for Wireless Networks, in Proceedings of the Sixth Annual ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom 2000), Boston, MA, August, 2000, pp. 243-254