



Display Technologies (2D)

Advanced Graphics and Image Processing

Rafał Mantiuk

Computer Laboratory, University of Cambridge

Overview

- ▶ **Temporal aspects**
 - ▶ Latency in VR
 - ▶ Eye-movement
 - ▶ Hold-type blur
- ▶ **2D displays**
 - ▶ 2D spatial light modulators
 - ▶ High dynamic range displays

Latency in VR

▶ Sources of latency in VR

- ▶ IMU ~1 ms
- ▶ sensor fusion, data transfer
- ▶ rendering: depends on complexity of scene & GPU – a few ms
- ▶ data transfer again
- ▶ Display
 - ▶ 60 Hz = 16.6 ms;
 - ▶ 70 Hz = 14.3 ms;
 - ▶ 120 Hz = 8.3 ms.

▶ Target latency

- ▶ Maximum acceptable: 20ms
- ▶ Much smaller (5ms) desired for interactive applications

▶ Example

- ▶ 16 ms (display) + 16 ms (rendering) + 4 ms (orientation tracking) = 36 ms latency total
- ▶ At 60 deg/s head motion, 1Kx1K, 100deg fov display:
 - ▶ 19 pixels error
 - ▶ Too much


Post-rendering image warp (time warp)

- ▶ To minimize end-to-end latency
- ▶ The method:
 - ▶ get current camera pose
 - ▶ render into a larger than screen buffer
 - ▶ get new camera pose
 - ▶ warp rendered image using the latest pose, send to the display
 - ▶ 2D image translation
 - ▶ 2D image warp
 - ▶ 3D image warp
- ▶ Original paper from Mark et al. 1997, also Darsa et al. 1997



Eye movement - basics



Fixation



Drift: 0.15-0.8 deg/s

Eye movement - basics


Saccade



160-300 deg/s

Eye movement - basics

Smooth Pursuit Eye Motion (SPEM)




Up to 80 deg/s

The gaze tends to be 5-20% slower than the object

Retinal velocity

- ▶ The eye tracks moving objects
 - ▶ Smooth Pursuit Eye Motion (SPEM)
 - ▶ Stabilizes images on the retina
 - ▶ But tracking is not perfect
- ▶ Loss of sensitivity mostly caused by imperfect SPEM
 - ▶ SPEM worse at high velocities

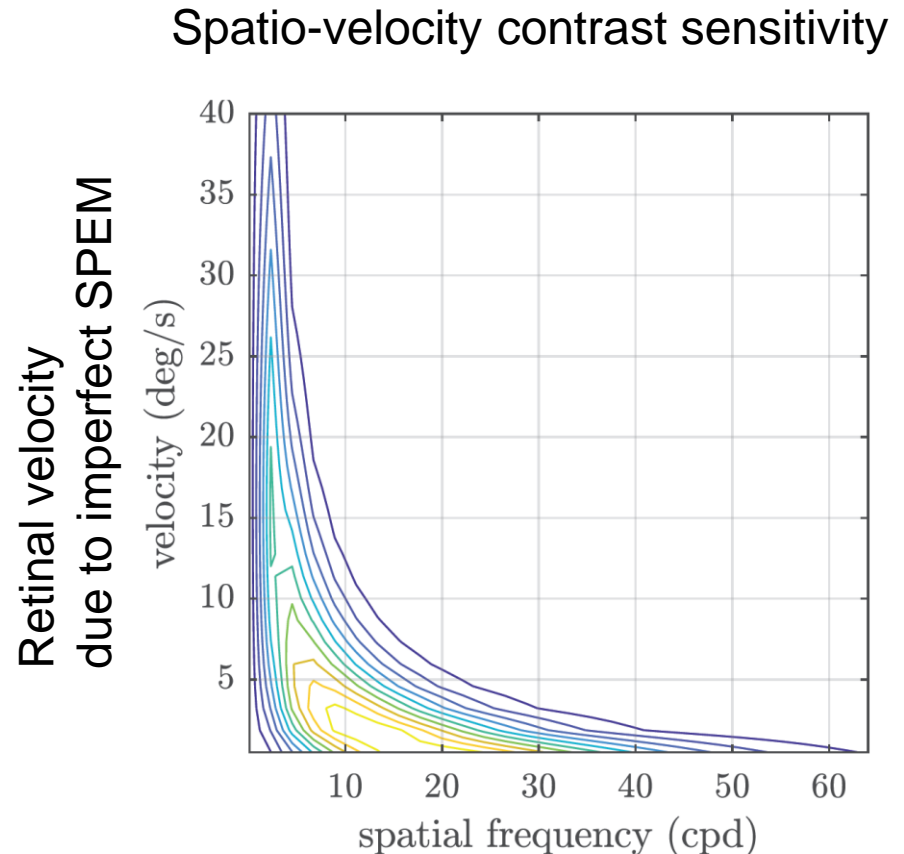

Kelly's model [1979]

Motion sharpening


- ▶ The visual system “sharpens” objects moving at speeds of 6 deg/s or more



- ▶ Potentially a reason why VR appears sharper than it actually is


Hold-type blur

- ▶ The eye smoothly follows a moving object
- ▶ But the image on the display is “frozen” for $1/60^{\text{th}}$ of a second

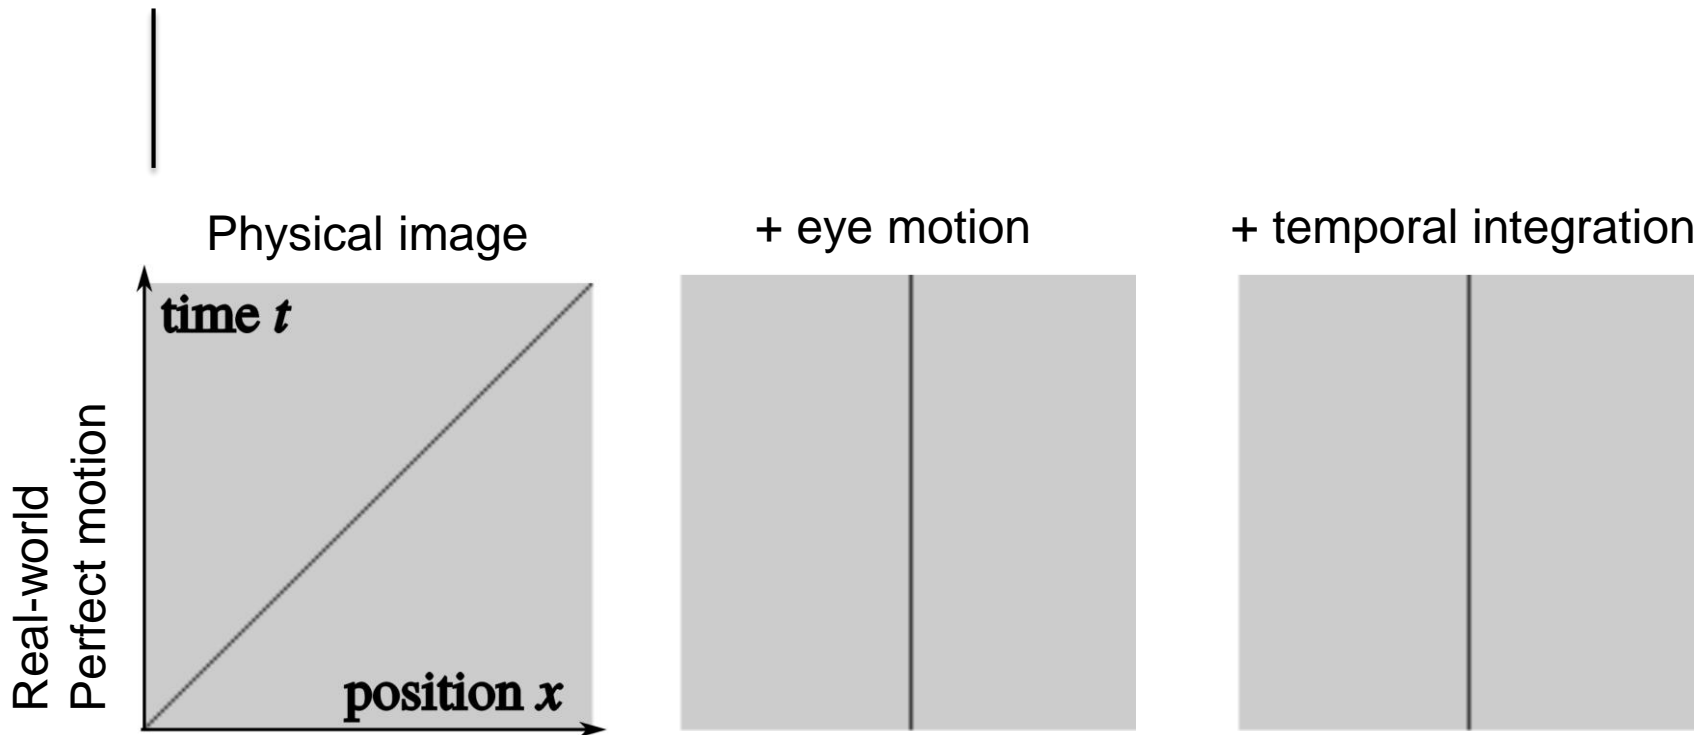

Hold-type blur

- ▶ The eye smoothly follows a moving object
- ▶ But the image on the display is “frozen” for $1/60^{\text{th}}$ of a second

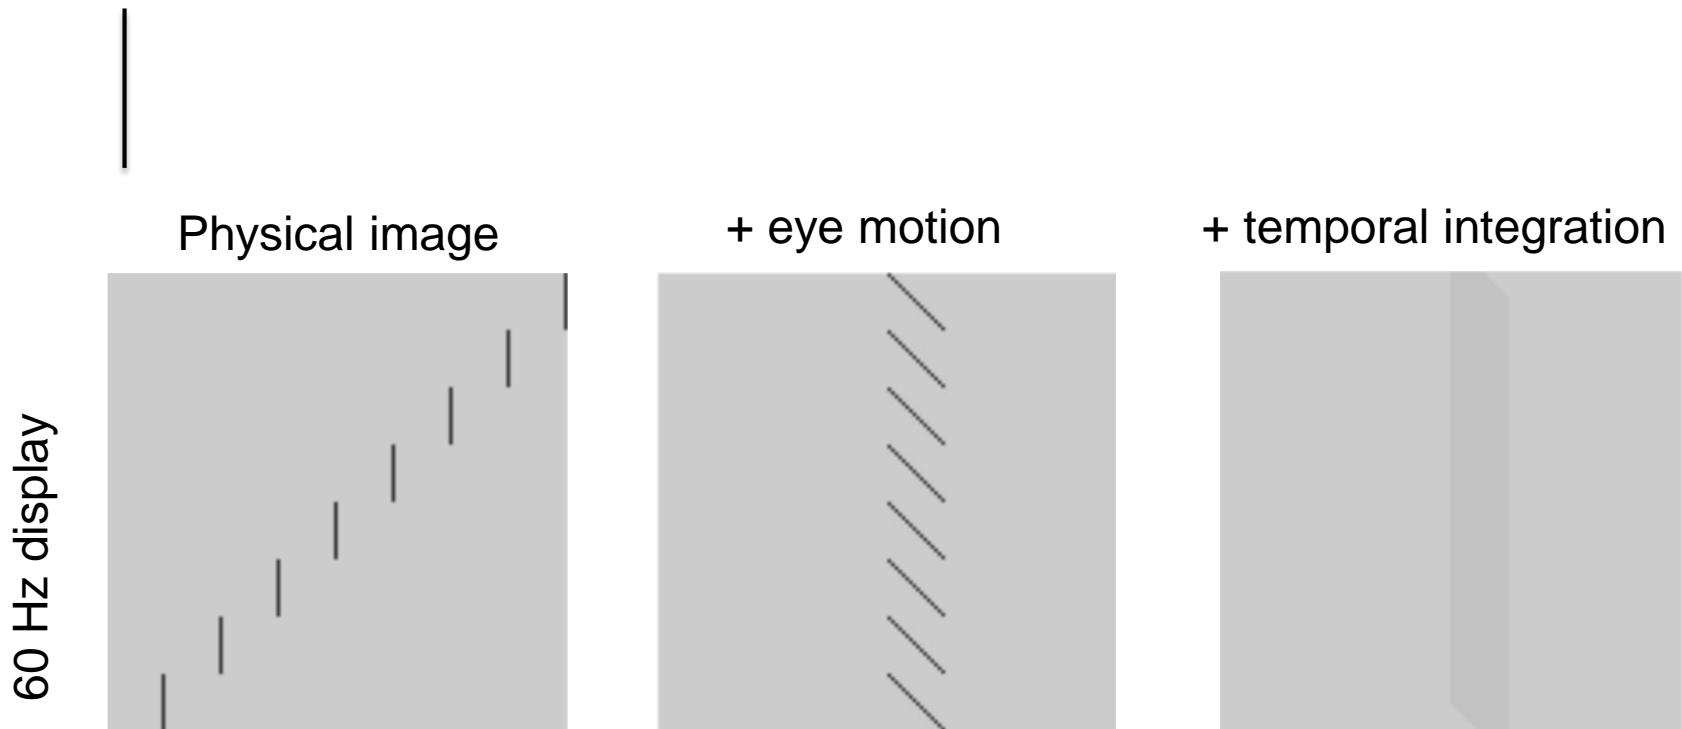



Original scene




With hold-type blur




Hold-type blur

- ▶ The eye smoothly follows a moving object
- ▶ But the image on the display is “frozen” for 1/60th of a second


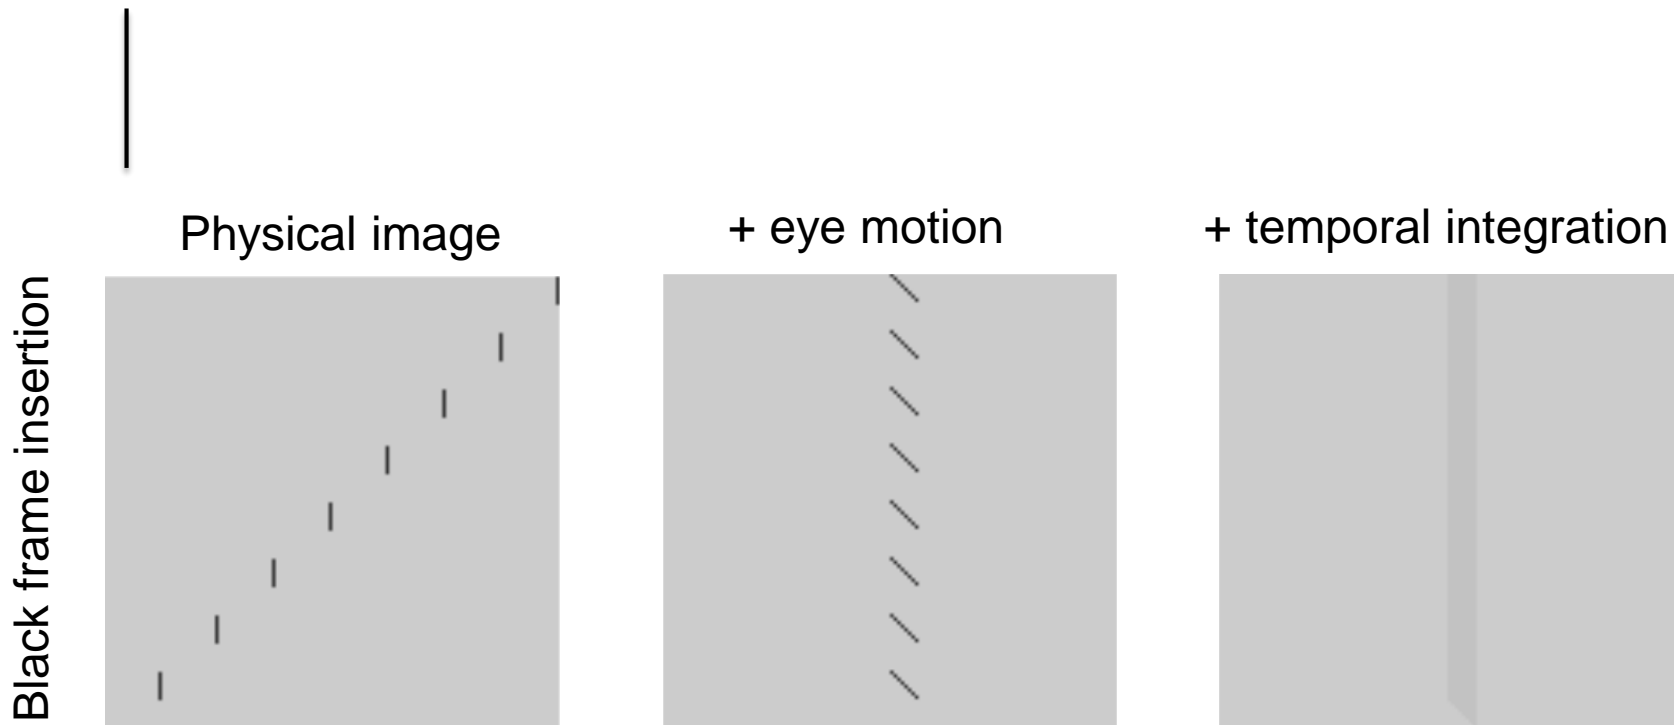


Low persistence displays

- ▶ Most VR displays flash an image for a fraction of frame duration
- ▶ This reduces hold-type blur
- ▶ And also reduces the perceived lag of the rendering

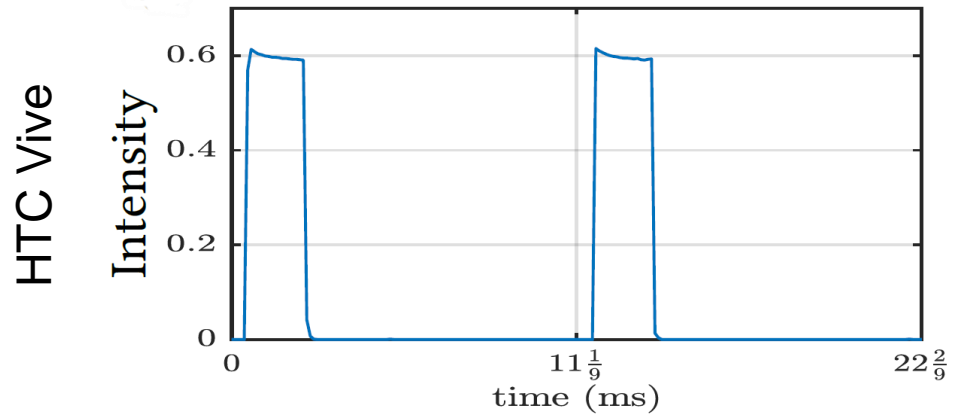

Mate 9 Pro + DayDream

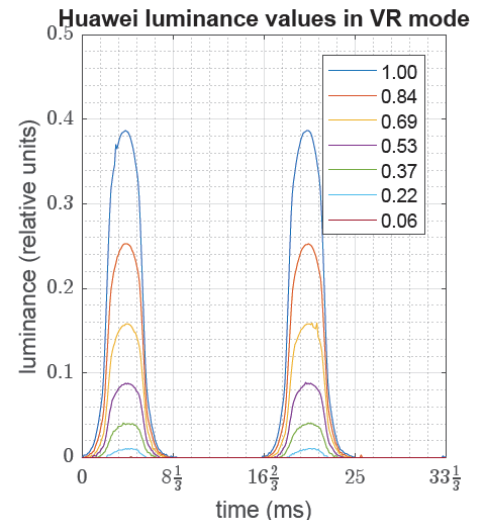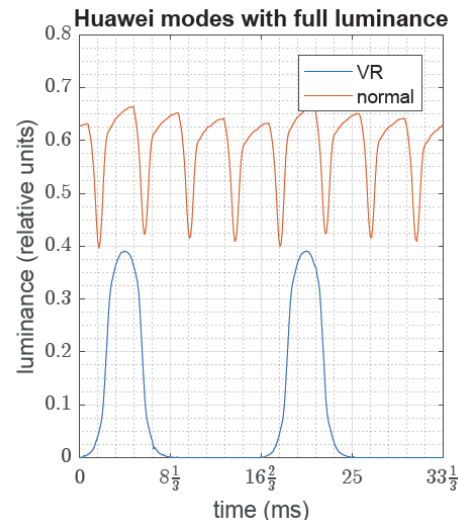

Black frame insertion

- ▶ Which invader appears sharper?




- ▶ A similar idea to low-persistence displays in VR
- ▶ Reduces hold-type blur

Flicker

▶ Critical Flicker Frequency

- ▶ The lowest frequency at which flickering stimulus appears as a steady field
- ▶ Measured for full-on / off presentation
- ▶ Strongly depends on luminance – big issue for HDR VR headsets
- ▶ Increases with eccentricity
- ▶ and stimulus size
- ▶ It is possible to detect flicker even at 2kHz
 - ▶ For saccadic eye motion




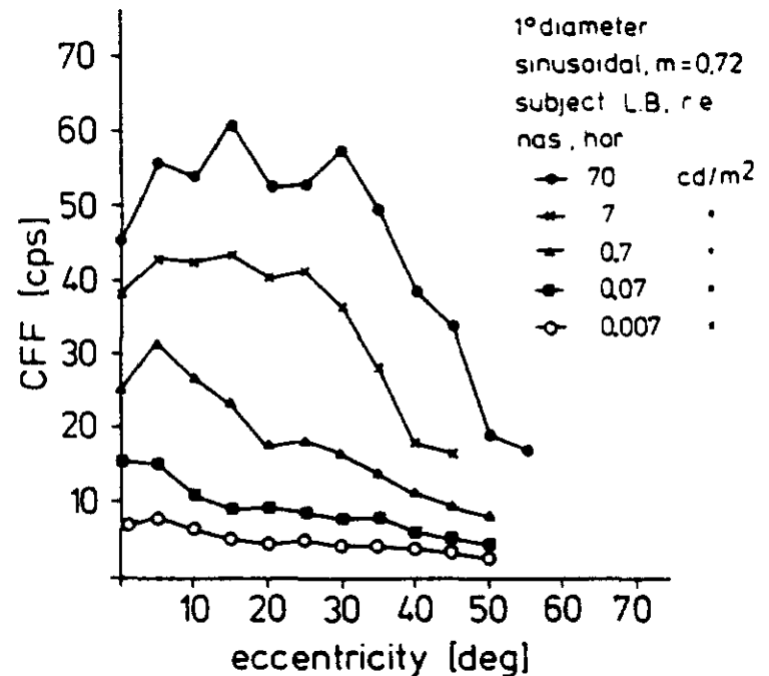


[Hartmann et al. 1979]

Overview

- ▶ **Temporal aspects**
 - ▶ Latency in VR
 - ▶ Eye-movement
 - ▶ Hold-type blur
- ▶ **2D displays**
 - ▶ 2D spatial light modulators
 - ▶ High dynamic range displays


Cathode Ray Tube

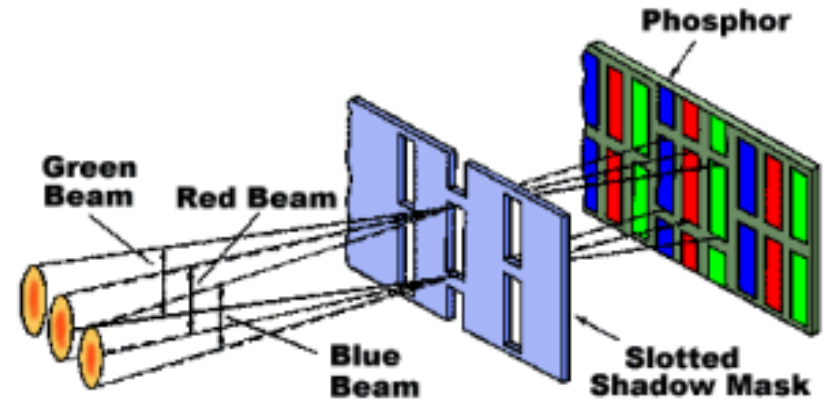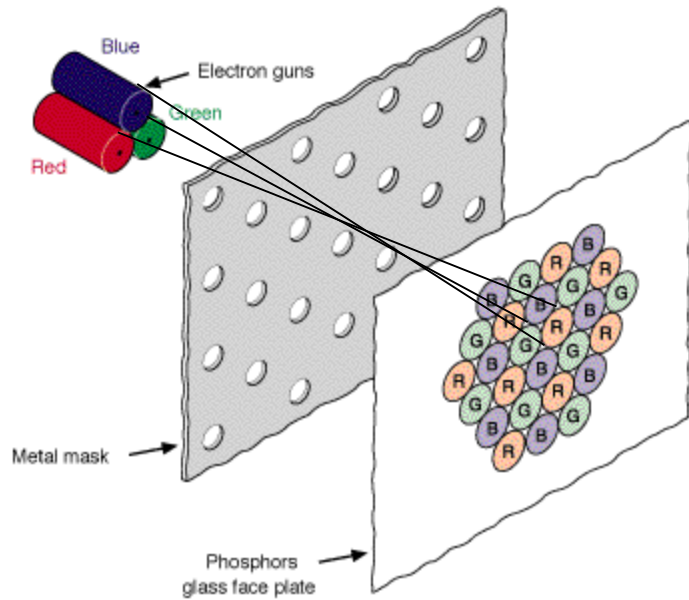

[from wikipedia]

Spectral Composition


- ▶ three different phosphors

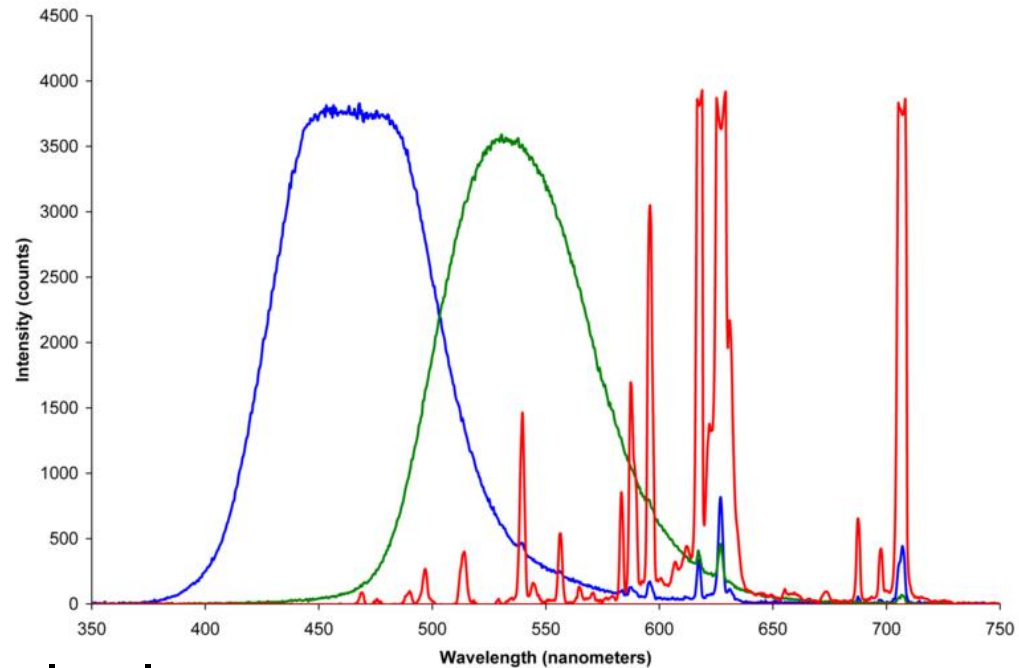

- ▶ saturated and natural colors
- ▶ inexpensive
- ▶ high contrast and brightness

[from wikipedia]

Liquid Chrystal Displays (LCD)

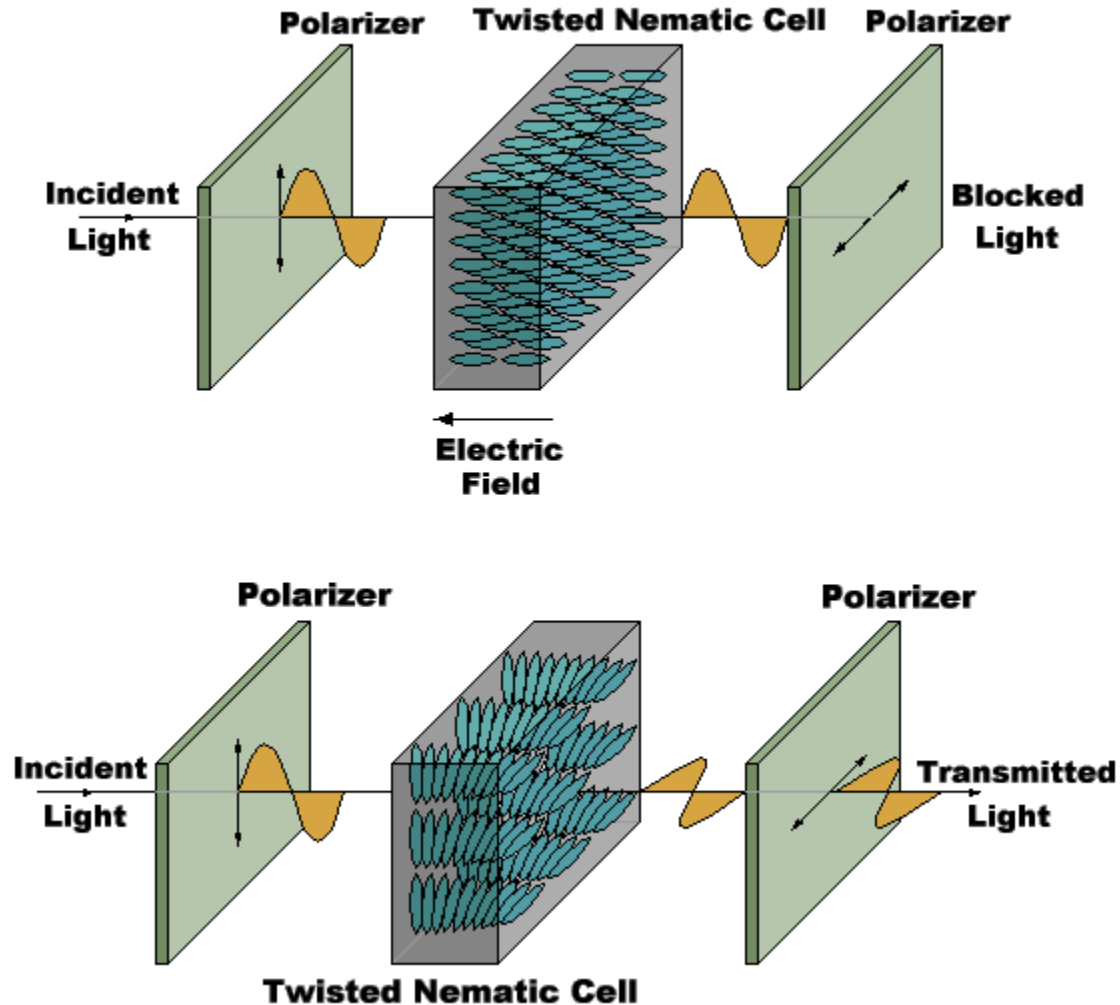

Twisted neumatic LC cell

TN Cell

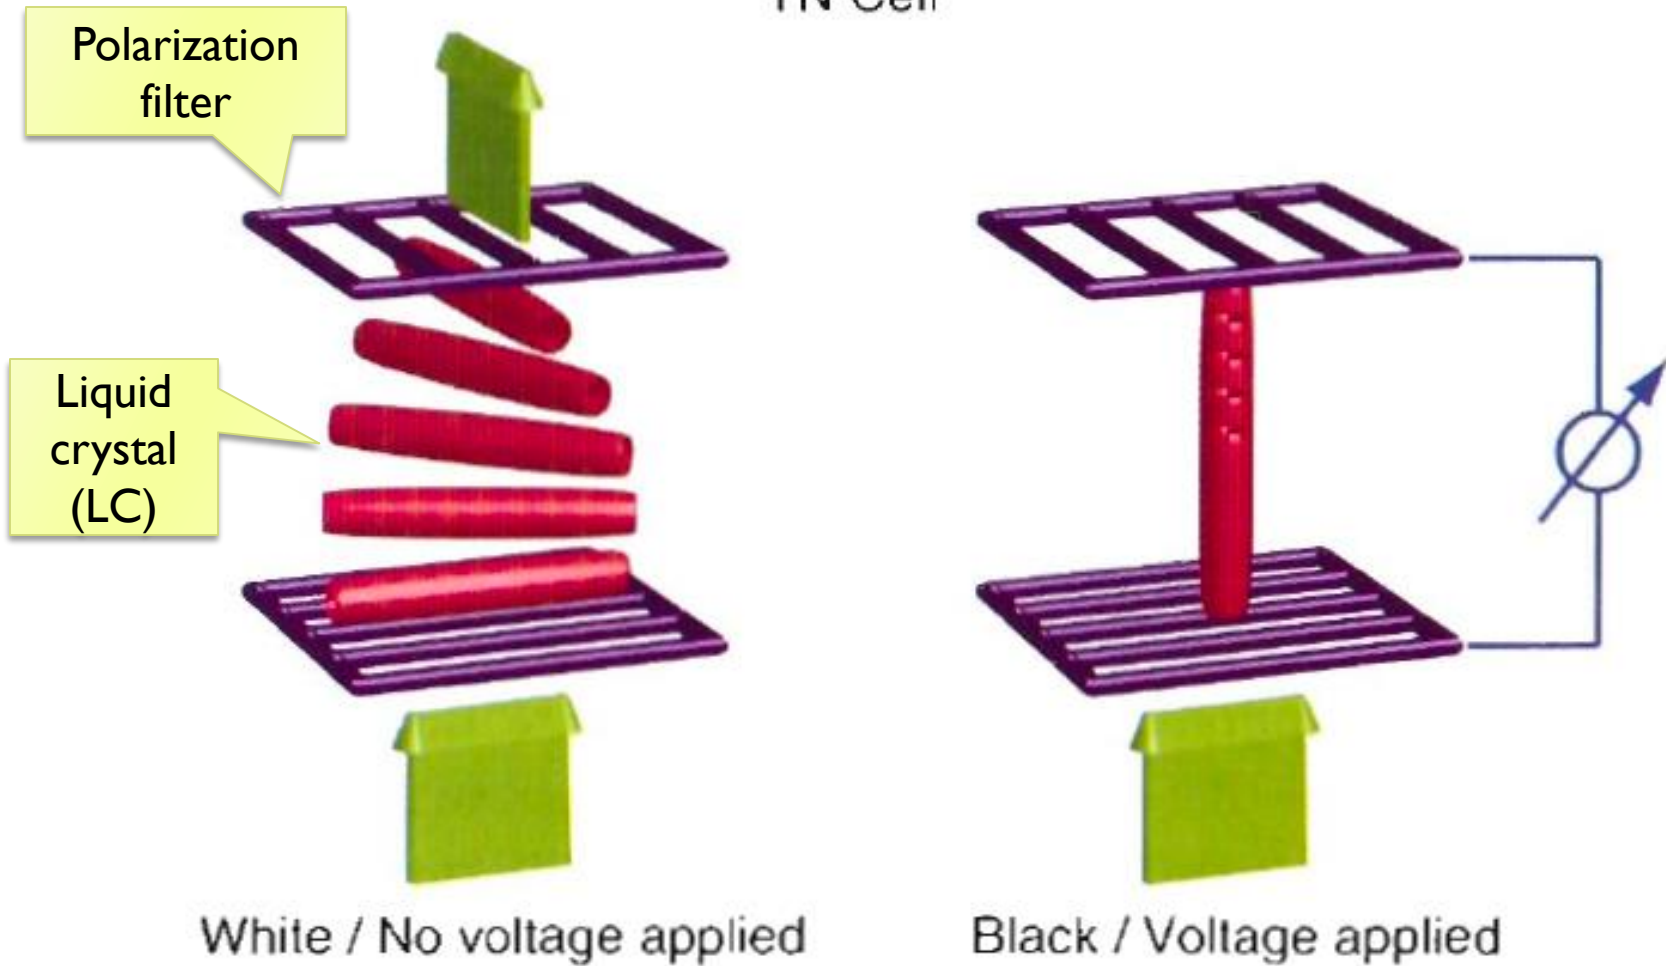


Figure from: High Dynamic Range Imaging by E. Reinhard et al.

In-plane switching cell (IPS)


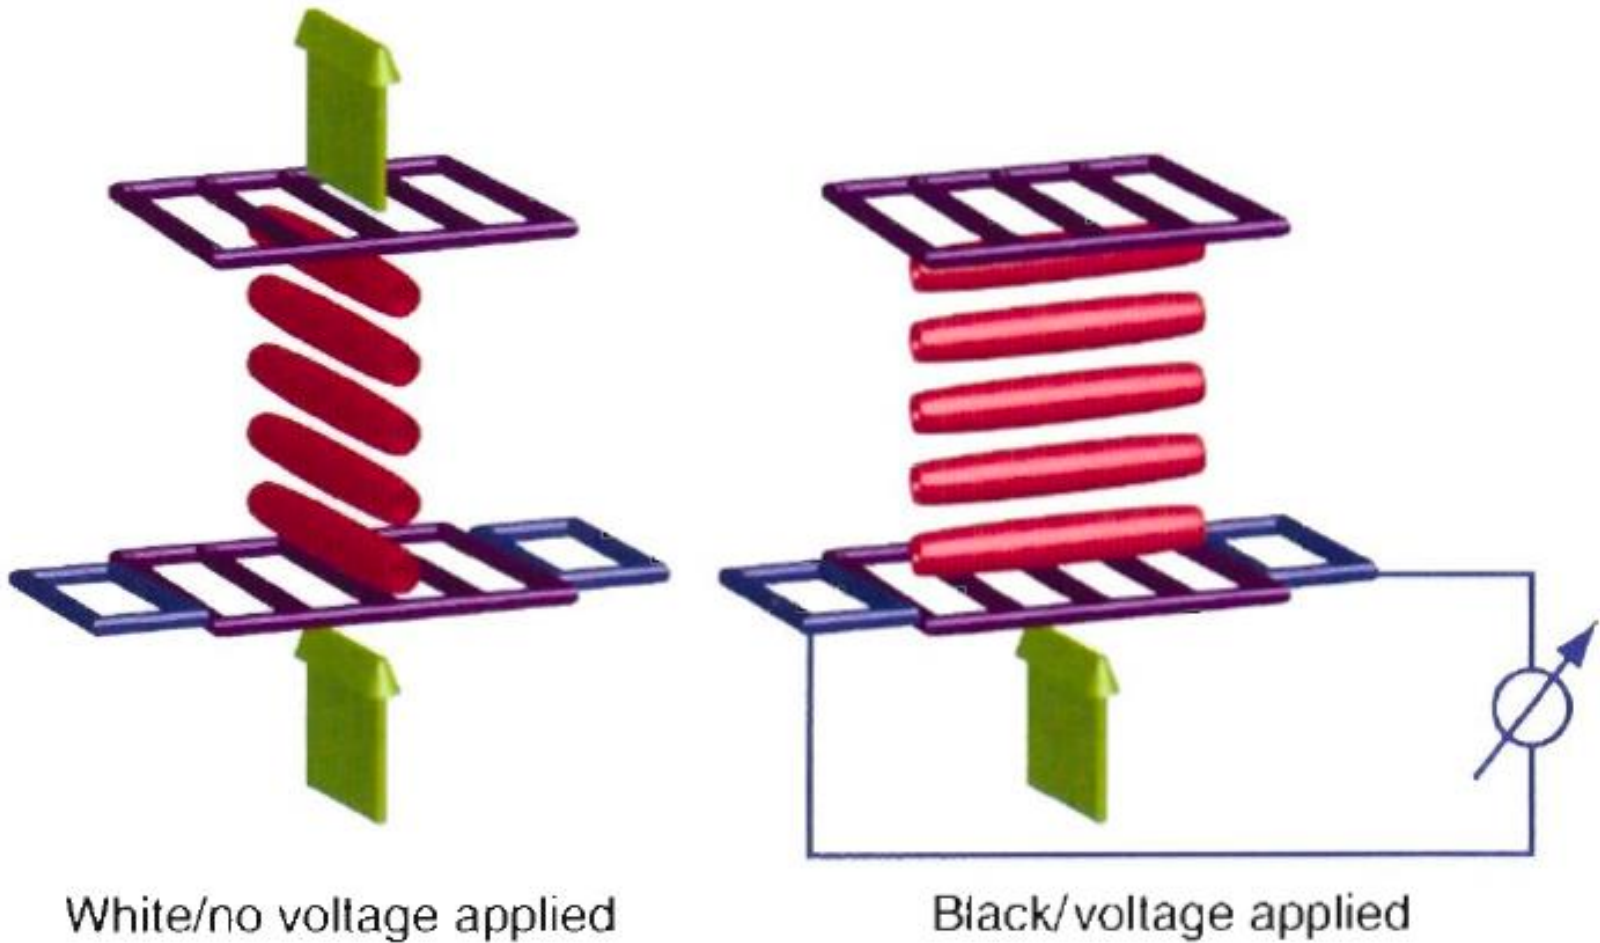


Figure from: High Dynamic Range Imaging by E. Reinhard et al.



LCD

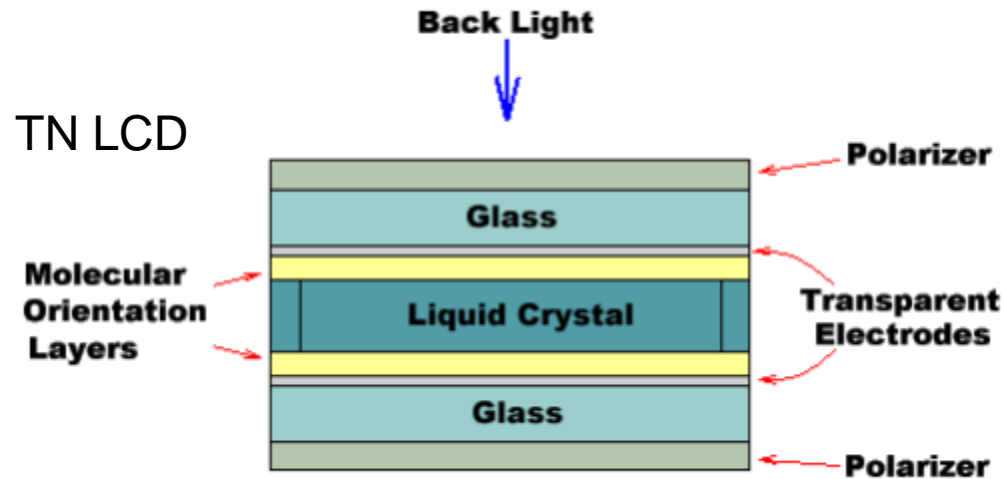


- ▶ color may change with the viewing angle
- ▶ contrast up to 3000:1
- ▶ higher resolution results in smaller fill-factor
- ▶ color LCD transmits only up to 8% (more often close to 4-5%) light when set to full white

LCD temporal response

- ▶ Experiment on an IPS LCD screen
- ▶ We rapidly switched between two intensity levels at 120Hz
- ▶ Measured luminance integrated over 1s
- ▶ The top plot shows the difference between expected ($\frac{I_{t-1}+I_t}{2}$) and measured luminance
- ▶ The bottom plot: intensity measurement for the full brightness and half-brightness display settings

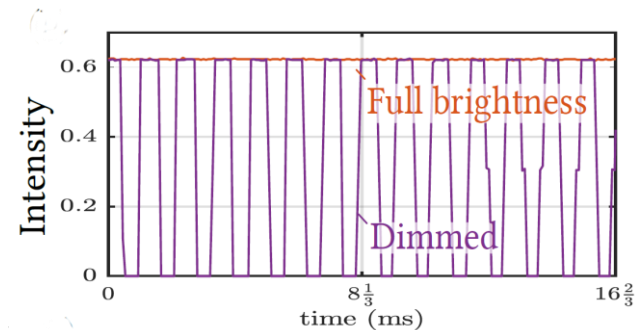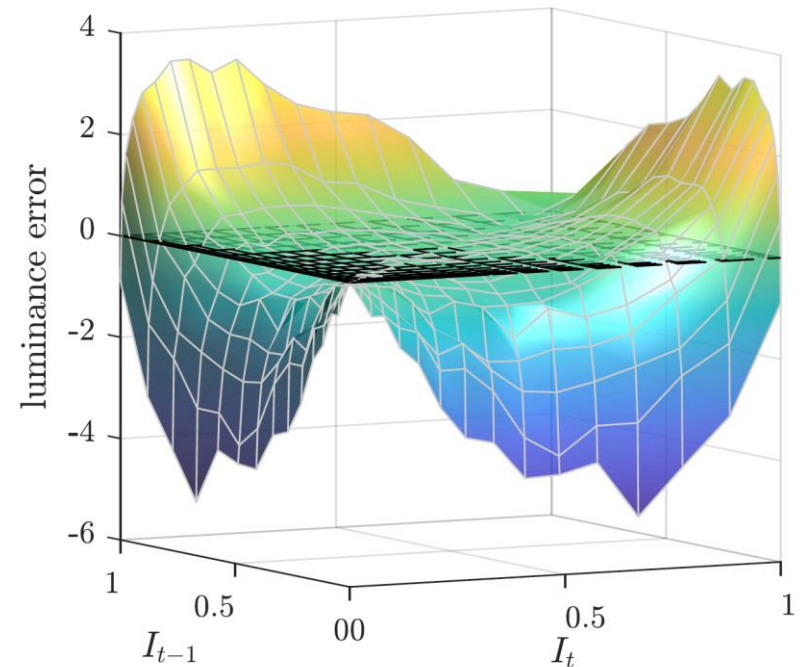


Digital Micromirror Devices (DMDs/DLP)

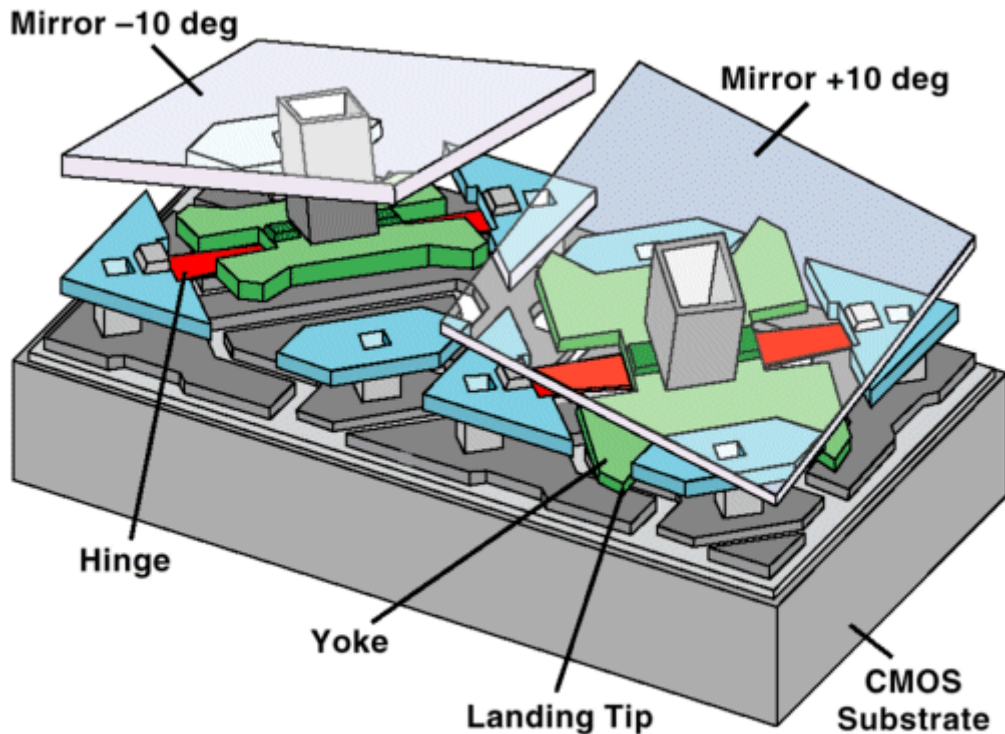


[Texas Instruments](#)

- ▶ 2-D array of mirrors
- ▶ Truly digital pixels
- ▶ Grey levels via Pulse-Width Modulation

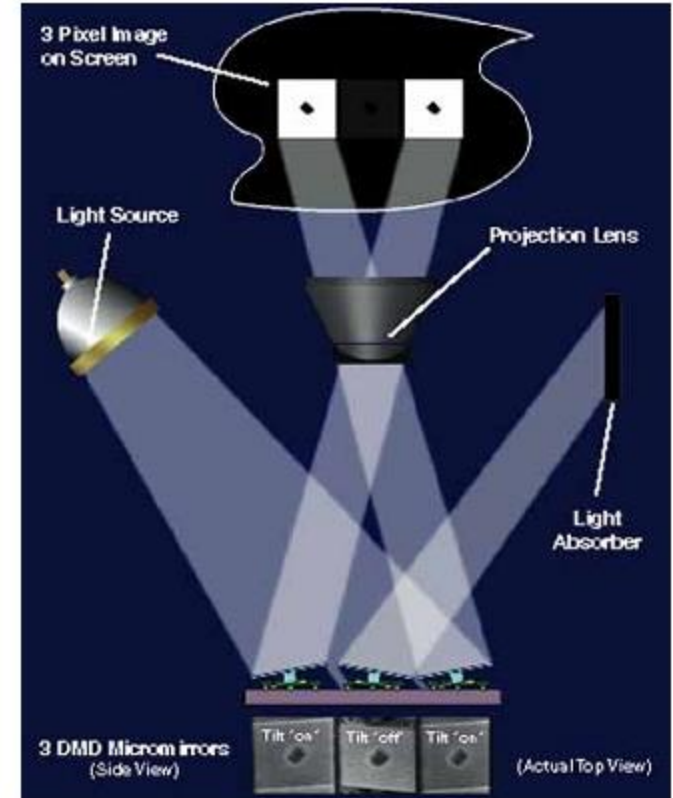

Liquid Crystal on Silicon (LCoS)


- ▶ basically a reflective LCD
- ▶ standard component in projectors and head mounted displays
- ▶ used e.g. in google glass

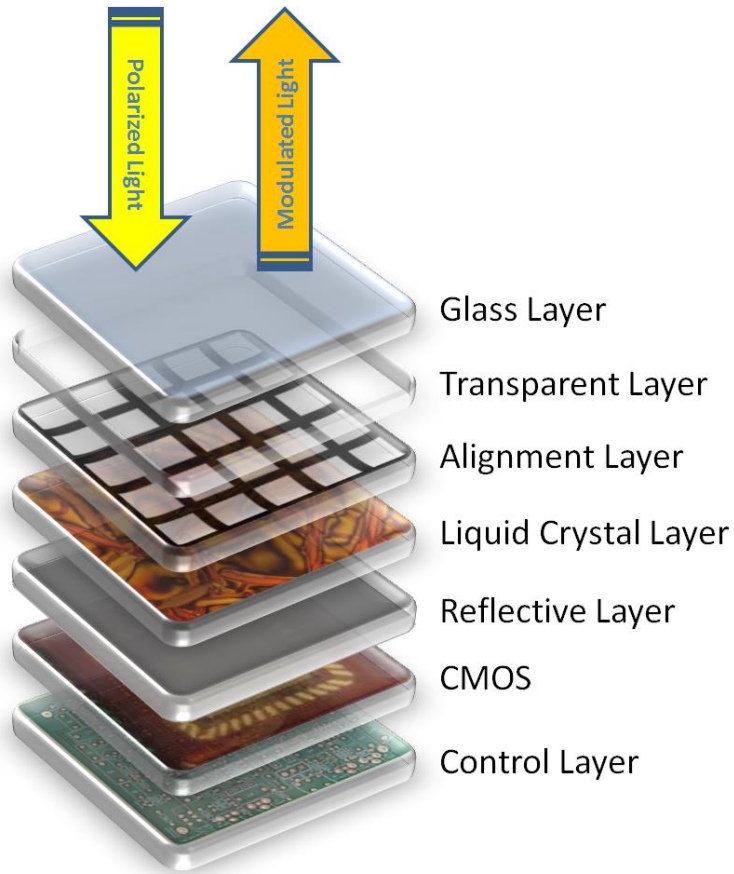

Scanning Laser Projector



- ▶ maximum contrast
- ▶ scanning rays

- ▶ very high power lasers needed for high brightness

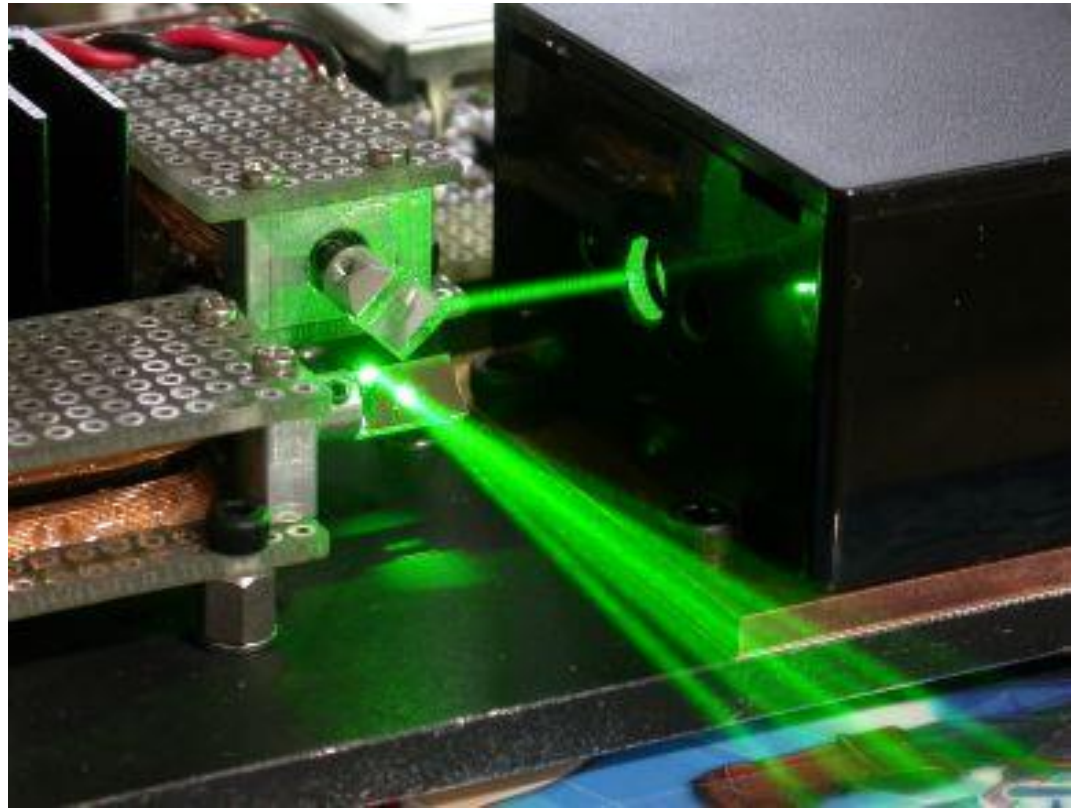


http://elm-chan.org/works/vlp/report_e.html

3-chip vs. Color Wheel Display

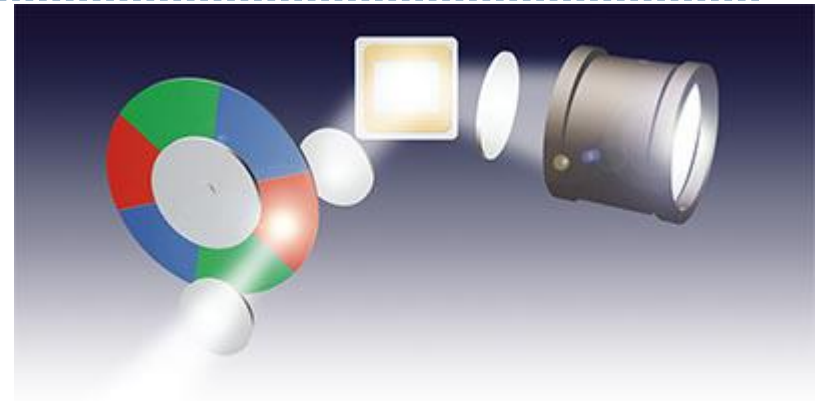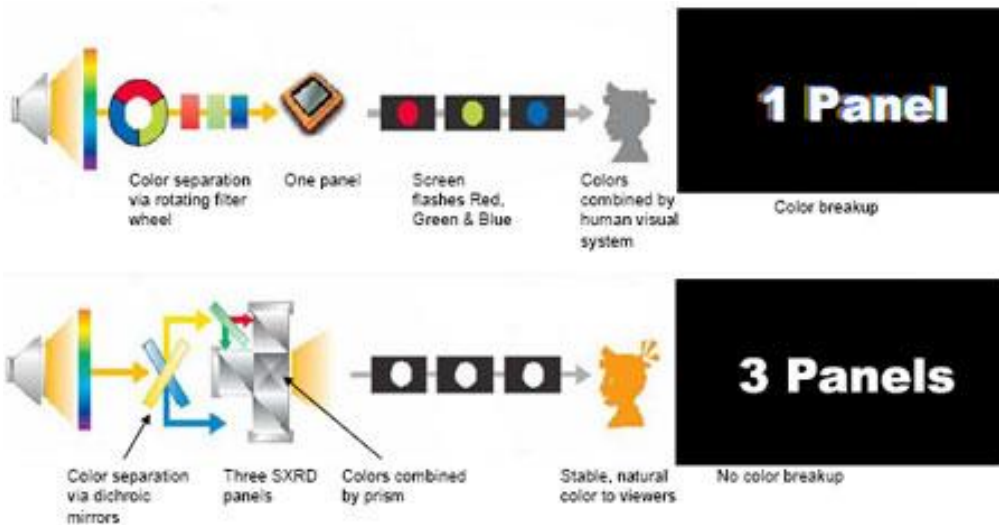

- ▶ color wheel
 - ▶ cheap
 - ▶ time sequenced colors
 - ▶ color fringes with motion/video
- ▶ 3-chip
 - ▶ complicated setup
 - ▶ no color fringes

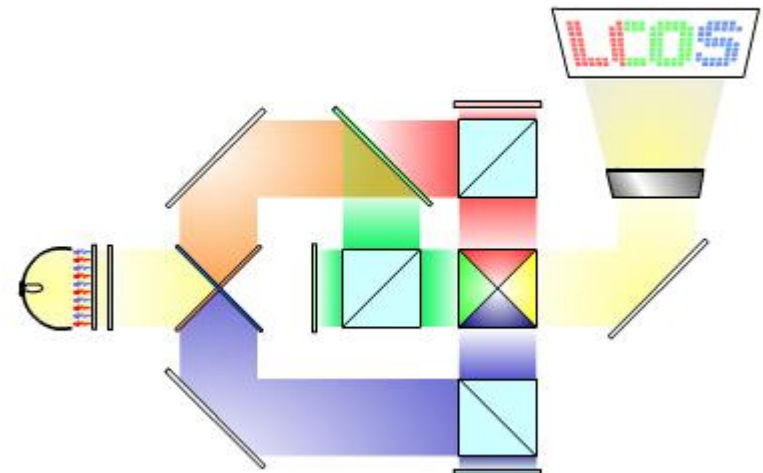


Virtual Retinal Display

- ▶ projection onto the retina
- ▶ challenge – small viewing box



From:
<http://www.engadget.com/2010/09/17/brothers-airscouter-floats-a-16-inch-display-onto-your-eye-bisc/>

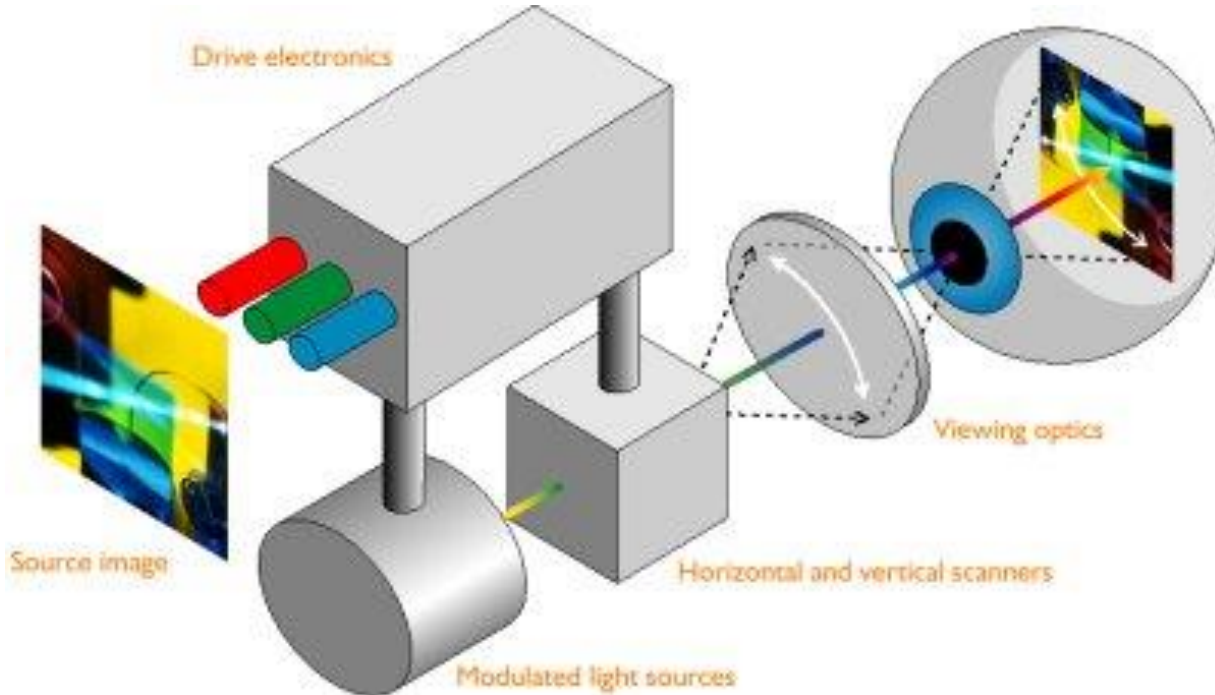


Google – project Glass

OLED


- ▶ based on electrophosphorescence
- ▶ large viewing angle
- ▶ the power consumption varies with the brightness of the image
- ▶ fast (< 1 microsec)
- ▶ arbitrary sizes

- ▶ life-span can be short
 - ▶ Worst for blue OLEDs

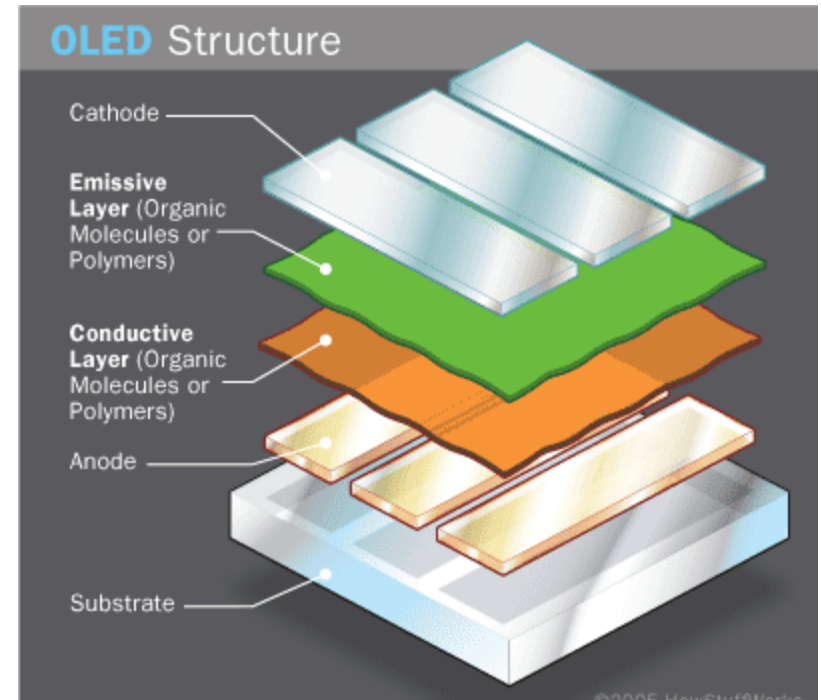


Active matrix OLED

- ▶ Commonly used in mobile phones (AMOLED)
- ▶ Very good contrast
 - ▶ But the screen more affected by glare than LCD
- ▶ But limited brightness
 - ▶ The brighter is OLED, the shorter is its live-span

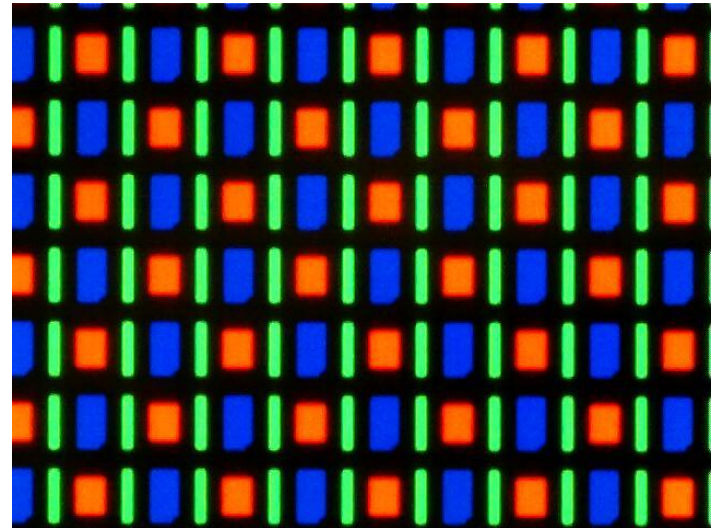

Temporal characteristic

A single uniform white frame @24/25/30 Hz

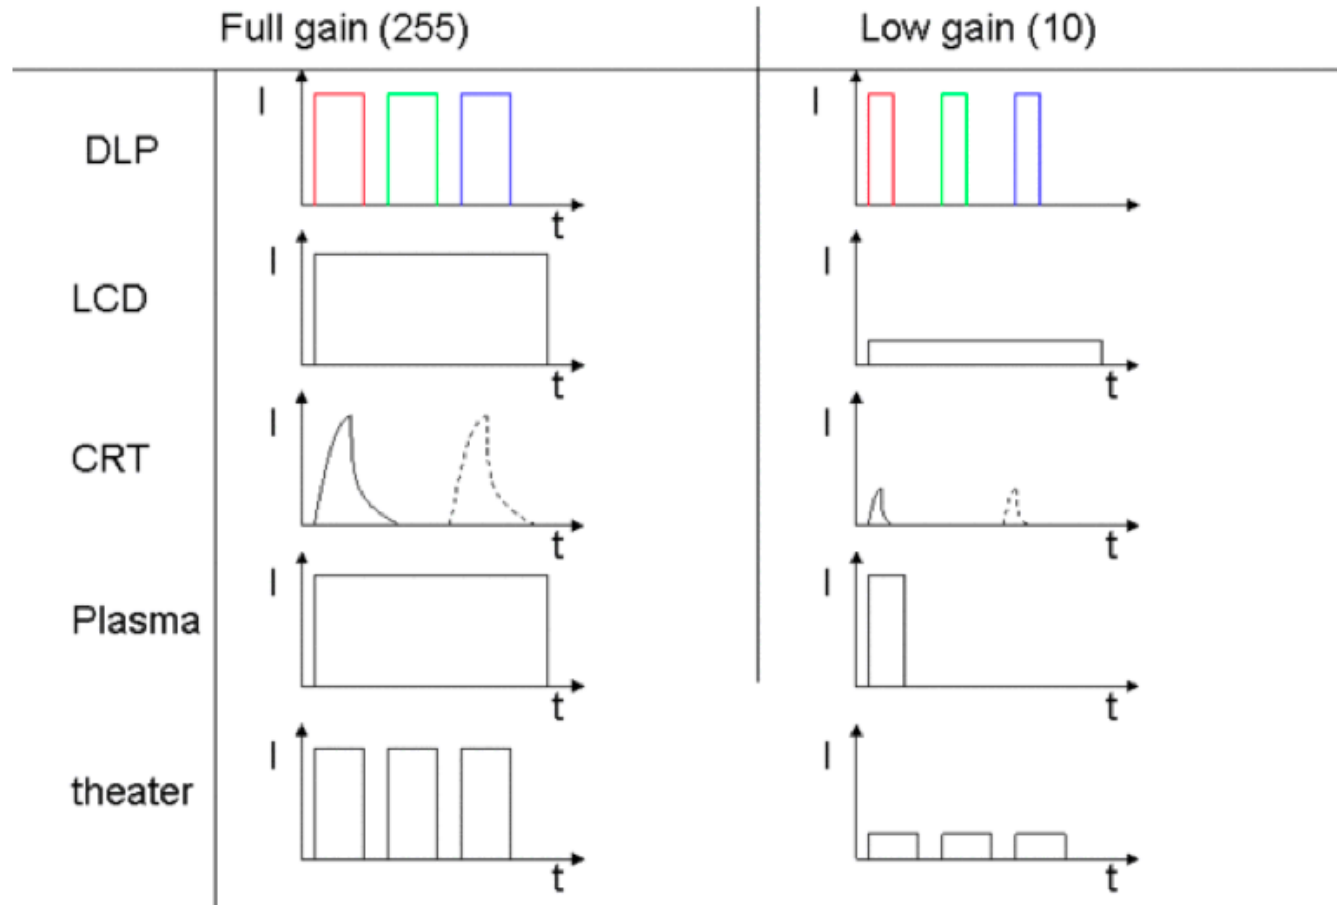


Electronic Paper





www.eink.com

Cross Section of Electronic-Ink Microcapsules

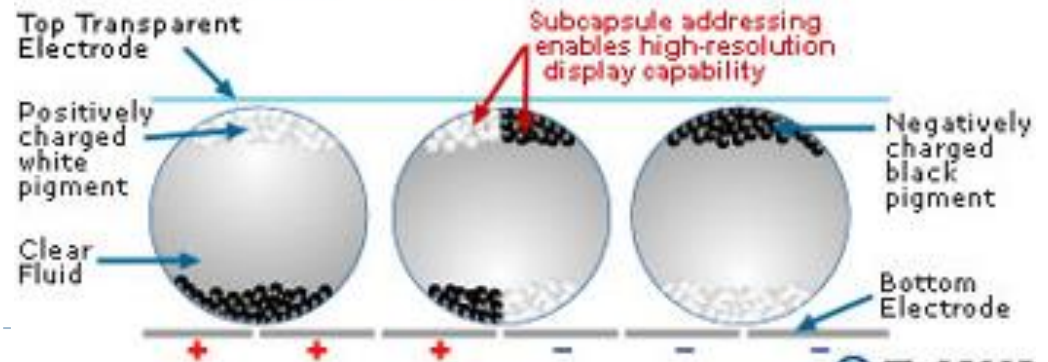



Prototype HDR display (2004)

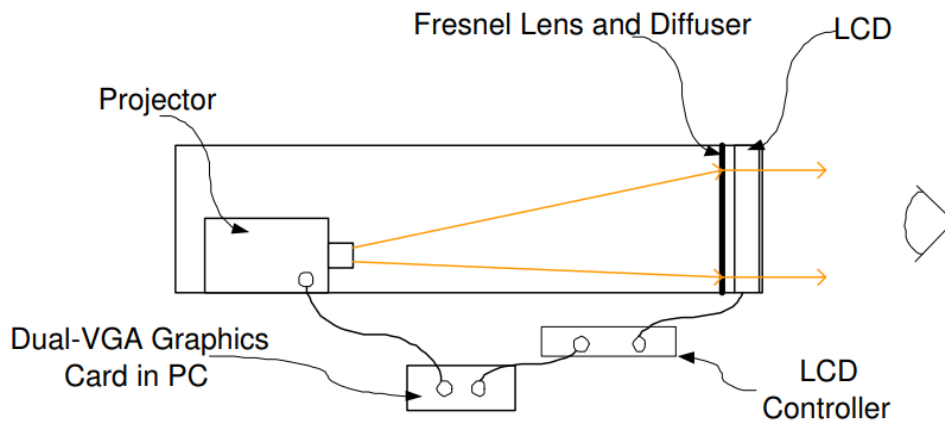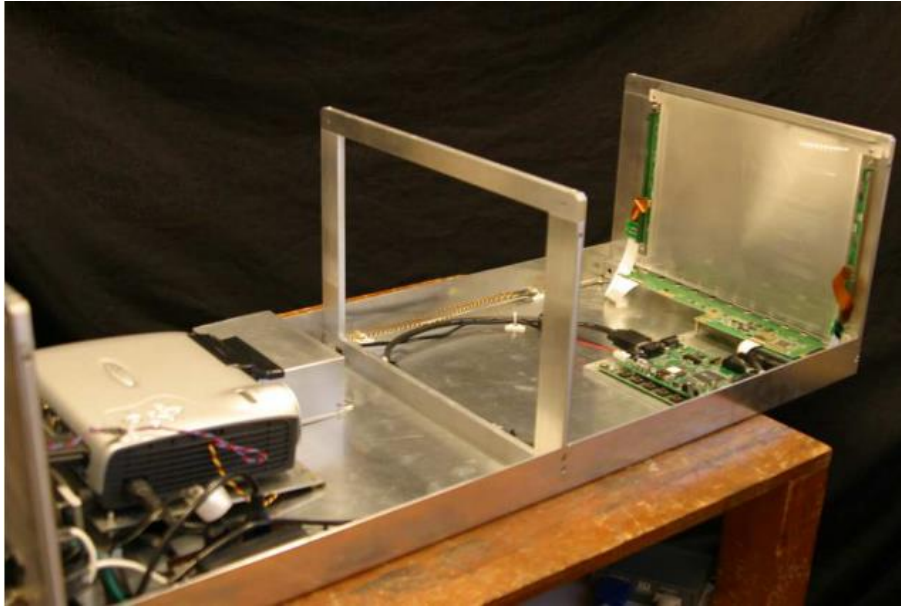



From [Seetzen et al. SIGGRAPH 2004]

Cambridge experimental HDR display

- ▶ 15,000 cd/m² peak luminance
- ▶ 0.01 cd/m² black level
- ▶ LCD resolution: 2048x1536
- ▶ Backlight (DLP) resolution: 1024x768
- ▶ Geometric-calibration with a DSLR camera
- ▶ Display uniformity compensation
- ▶ Bit-depth of DLP and LCD extended to 10 bits using spatio-temporal dithering

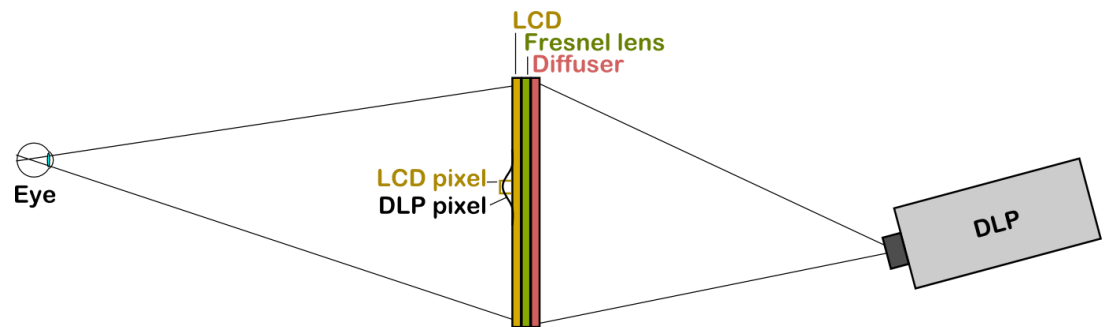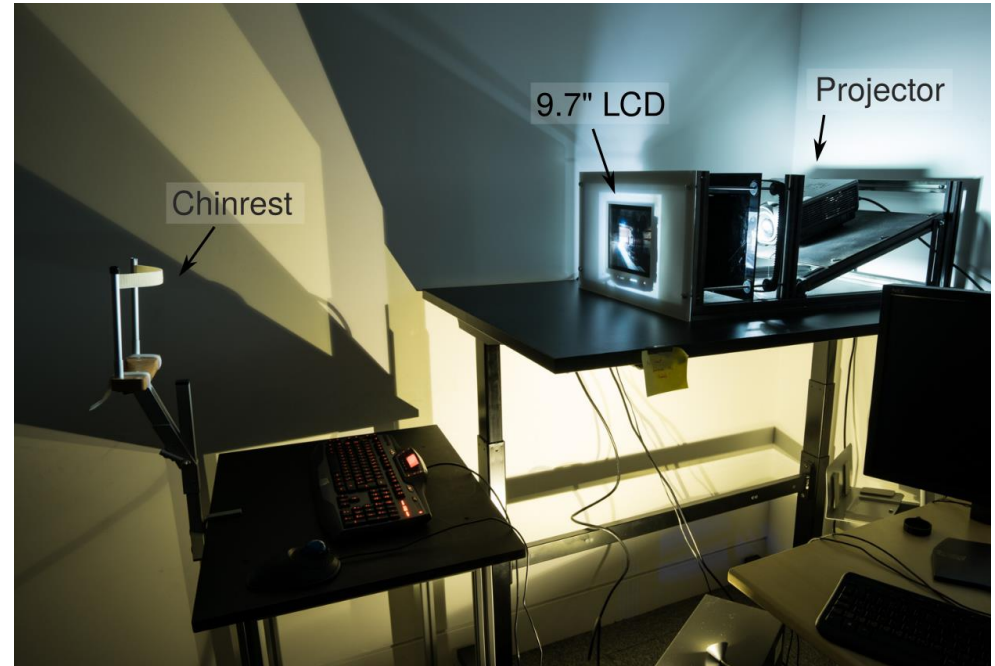

Modern HDR displays

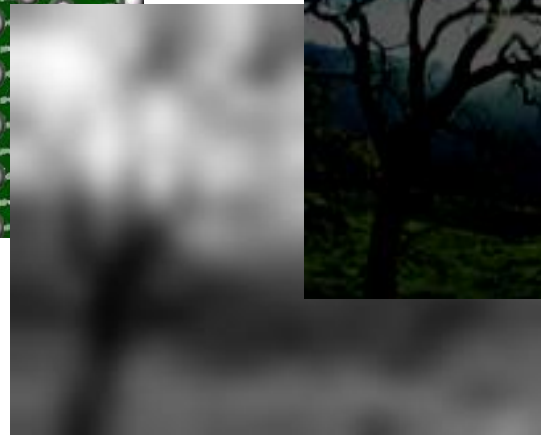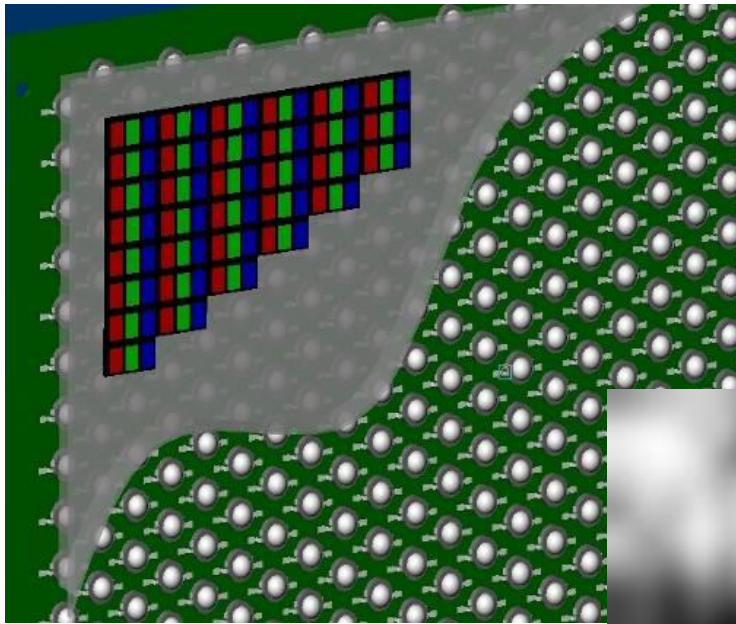

- Modulated LED array
- Conventional LCD
- Image compensation


Low resolution LED Array \times High resolution Colour Image = High Dynamic Range Display

HDR Display

- ▶ **Two spatial modulators**
 - ▶ 1st modulator contrast 1000:1
 - ▶ 2nd modulator contrast 1000:1
 - ▶ Combined contrast 1000,000:1
- ▶ **Idea: Replace constant backlight of LCD panels w/ array of LEDs**
 - ▶ Very few (about 1000) LEDs sufficient
 - ▶ Every LED intensity can be set individually
 - ▶ Very flat form factor (fits in standard LCD housing)
- ▶ **Issue:**
 - ▶ LEDs larger than LCD pixels
 - ▶ This limits maximum local contrast



Veiling Luminance

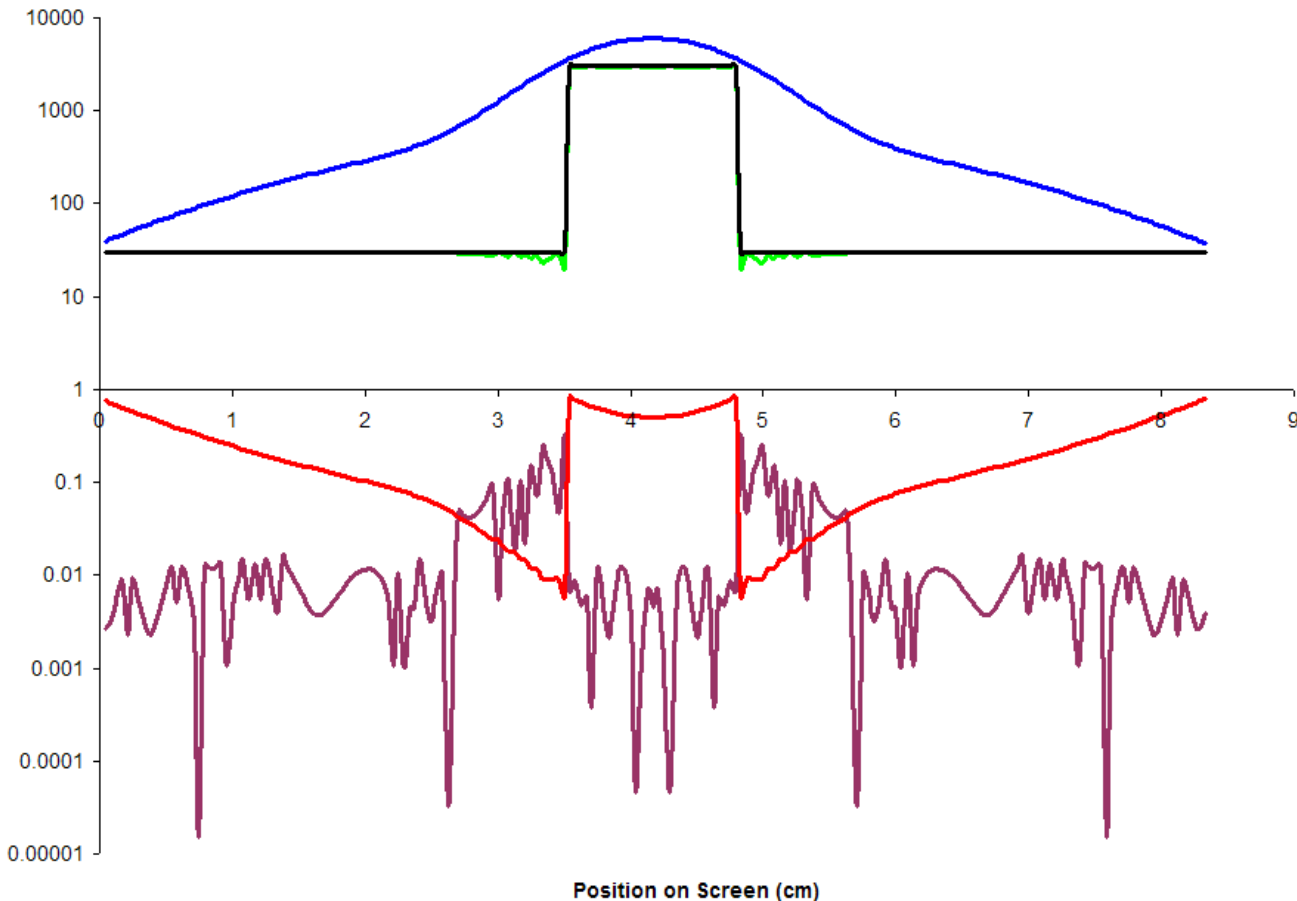

Receive Image


Drive LED

Divide Image by
LED light field to
obtain LCD values

Output Luminance
is the product of
LED light field and
LCD transmission
(modest error)



Veiling Luminance

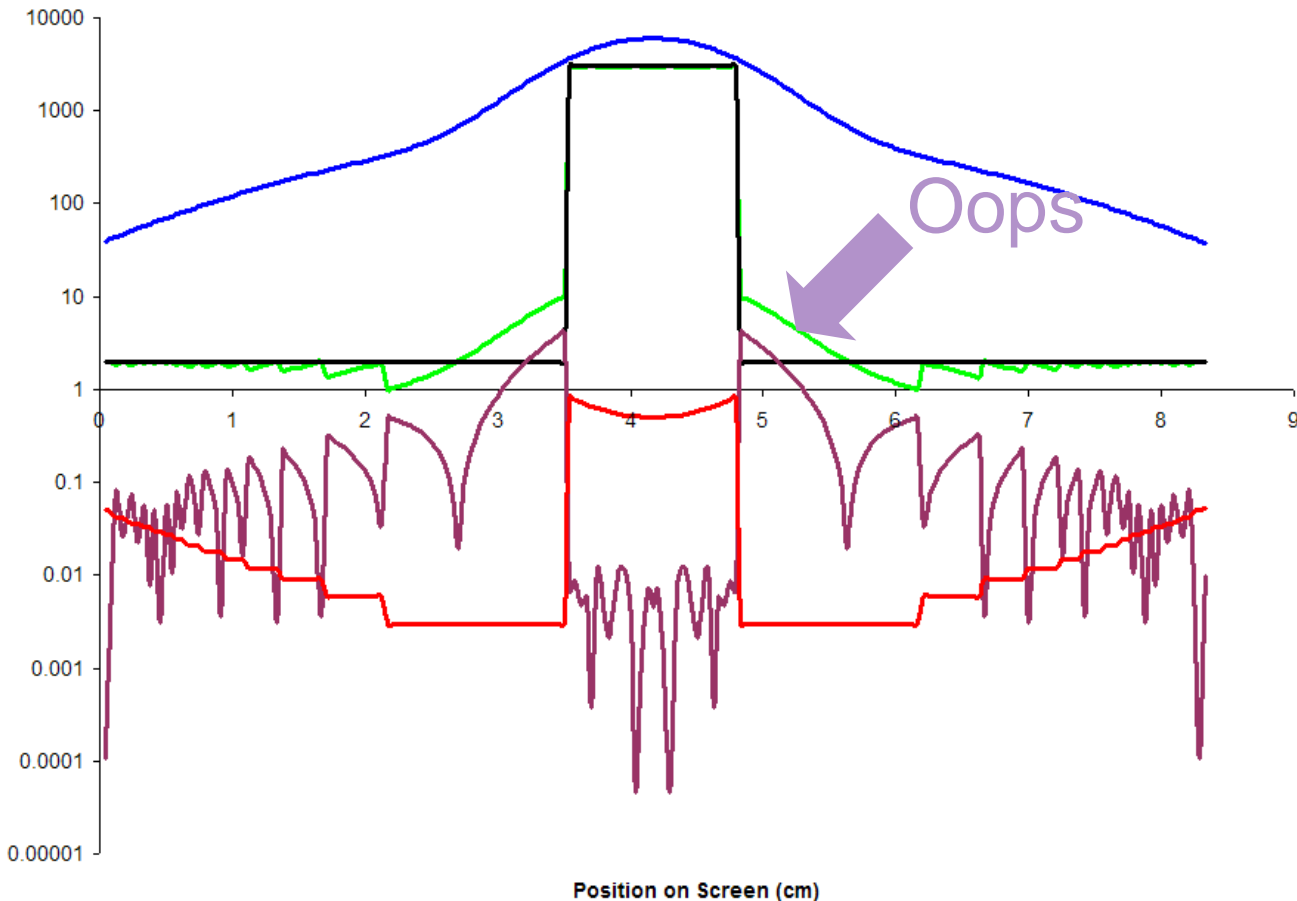

Receive Image

Drive LED


Divide Image by
LED light field to
obtain LCD values

Output Luminance
is the product of
LED light field and
LCD transmission
(Problematic error)



Veiling Luminance


- ▶ **Maximum perceivable contrast**
 - ▶ Globally very high (5-6 orders of magnitude)
 - ▶ That is why we create these displays!
 - ▶ Locally can be low: 150:1
- ▶ **Point-spread function of human eye**
 - ▶ Refer to „HDR and tone mapping” lecture
 - ▶ Consequence: high contrast edges cannot be perceived at full contrast

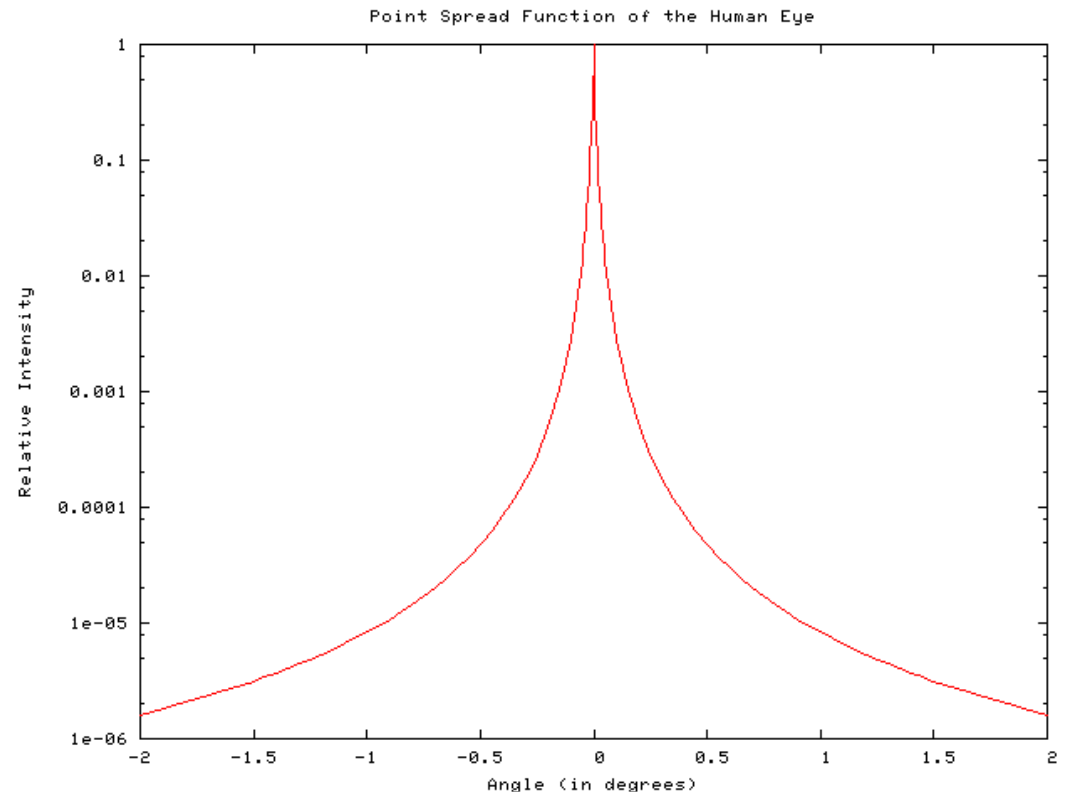

Veiling Glare (Camera)




Veiling Luminance

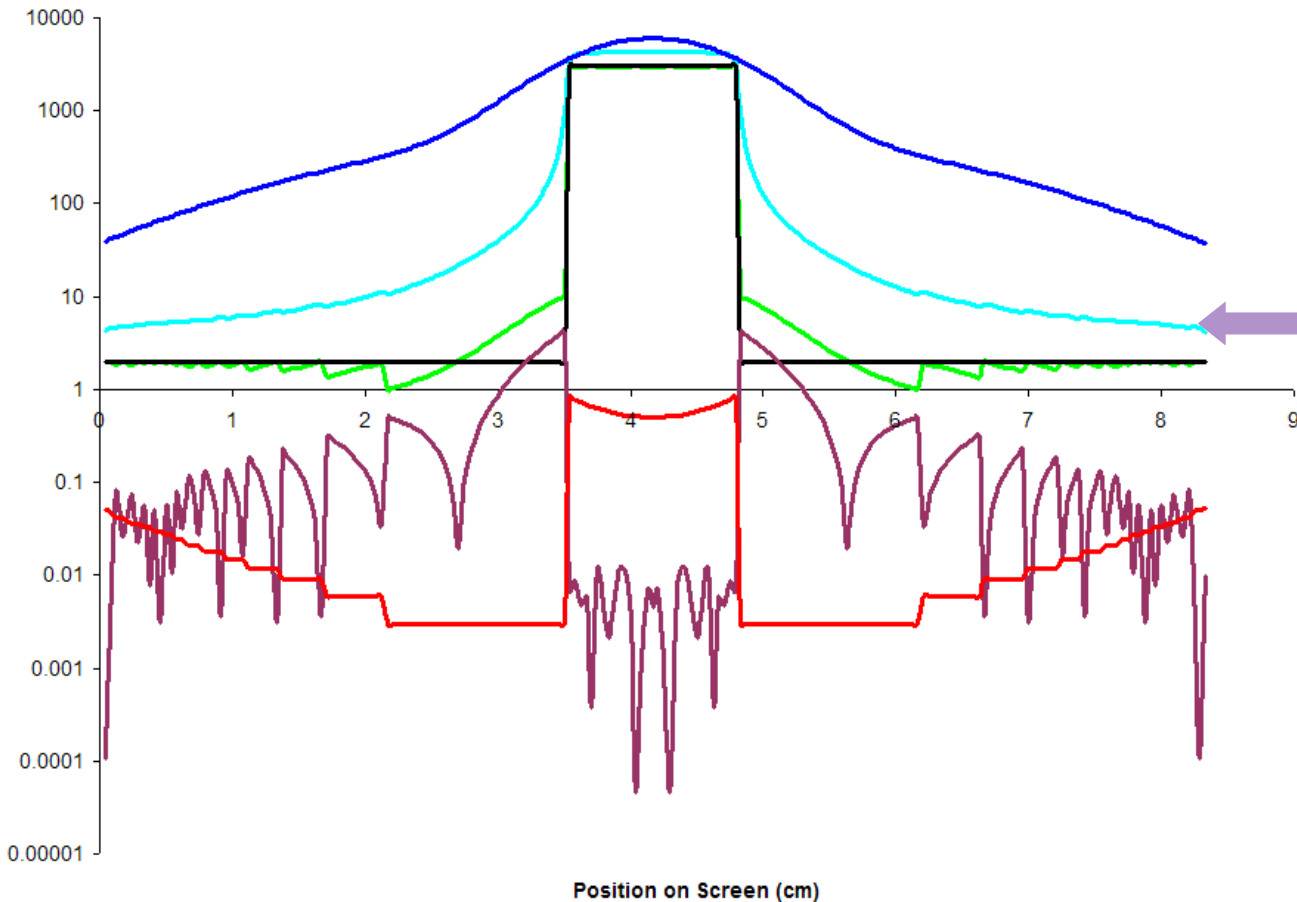

Veiling Luminance masks imperfection



HDR rendering algorithm - high level

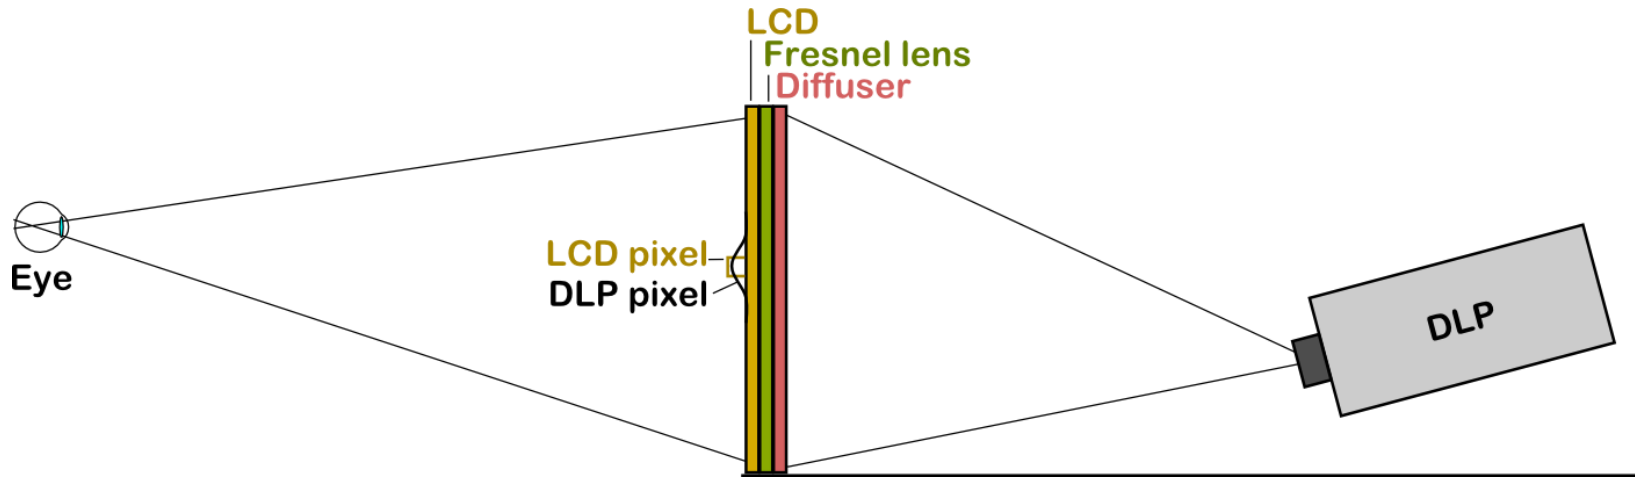

Desired image

DLP blur (PSF)

$$\arg \min_{L, D} \|I - g D \circ L\|_2$$

Subject to:


$$\forall(x, y) \quad L_{min} \leq L(x, y) \leq L_{max}$$

$$\forall(x, y) \quad D_{min} \leq D(x, y) \leq D_{max}$$

DLP image

LCD image

Simplified HDR rendering algorithm

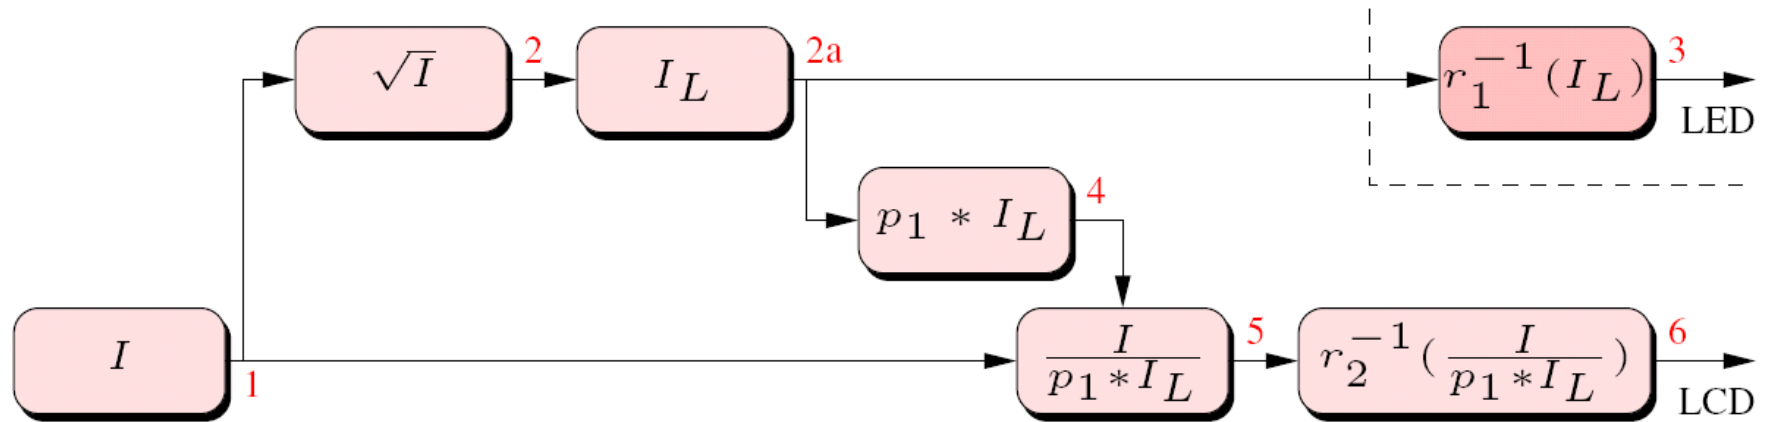

Rendering Algorithm



References

- ▶ HAINICH, R.R. AND BIMBER, O. 2011. *Displays: Fundamentals and Applications*. CRC Press.
- ▶ SEETZEN, H., HEIDRICH, W., STUERZLINGER, W., ET AL. 2004. High dynamic range display systems. *ACM Transactions on Graphics* 23, 3, 760.
- ▶ Visual motion test for high-frame-rate monitors:
 - ▶ <https://www.testufo.com/>