


11 Mobile and Sensor Systems (cm542)

- (a) Describe the differences between proactive and reactive ad hoc routing protocols. [3 marks]
- (b) Consider the following routing table for mobile node U in an ad-hoc network:

Dest	Next Hop	Number of Hops
X	V	2
V	V	1
Z	V	2
S	S	1
R	R	1
Y	R	2
T	S	2
W	R	3

For the mobile nodes snapshot illustrated here:

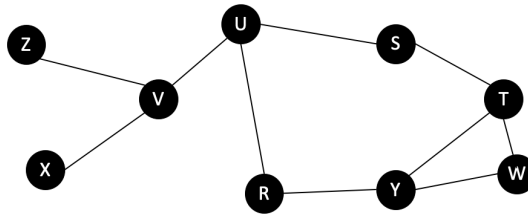

- (i) How would the routing table for node U be updated by the Destination Sequenced Distance Vector (DSDV) routing protocol, after node Y runs out of battery and disconnects from the network? [Assume no other nodes move in that time interval]. [3 marks]
- (ii) Now consider the scenario where node Z needs to communicate to node T regularly, but no other nodes communicate. How would you modify the routing protocol? Are there other considerations which would impact the choice of protocol to use? [4 marks]
- (iii) Consider routing nodes STYW from the original mobile node snapshot moving out of reach of nodes ZVURX. Node S and Y are intermittently moving back in range of the latter cluster. Node Z still needs to communicate regularly with T. What protocol would you use? Illustrate the considerations that would drive your choice of protocol. [5 marks]
- (iv) Now assume that the nodes depicted in the diagram above are fixed sensors, instead of mobile nodes. Node Y is a sink and all other nodes forward data to it. Explain why the mobile routing solutions of the previous answers are not suitable. Suggest a more appropriate protocol, describing its principles and advantages in this scenario. [5 marks]