

Distributed systems

Lecture 11: Object-Oriented Middleware (OOM),
clocks and distributed time

Dr. Robert N. M. Watson

1

The story so far...

- Distributed systems are hard
- Looking at simple **client/server** interaction, and use of **Remote Procedure Call (RPC)**
 - invoking methods on server over the network
 - middleware generates **stub code** which can **marshal / unmarshal** arguments and replies
 - saw case study of NFS (RPC-based file system)
- Other RPC systems (e.g., DCE RPC)

2

Object-Oriented Middleware

- SunRPC / DCE RPC forward **functions**, and do not support complex types, exceptions, or polymorphism
- **Object-Oriented Middleware (OOM)** arose in the early 90s to address this
 - Assume programmer is writing in OO-style (and language)
 - ‘Remote objects’ will behave like local objects, but they methods will be forwarded over the network a la RPC
 - References to objects can be passed as arguments or return values – e.g., passing a directory object reference (Promote NFS’s concept of a “handle” into the framework)
- Makes it much easier to program – especially if your program is already object oriented!

3


CORBA (1989)

- First OOM system was CORBA
 - **Common Object Request Broker Architecture**
 - specified by the OMG: Object Management Group
- OMA (Object Management Architecture) is the general model of how objects interoperate
 - Objects provide services.
 - Clients makes a request to an object for a service.
 - Client doesn’t need to know where the object is, or anything about how the object is implemented!
 - Object interface must be known (public)

4

Object Request Broker (ORB)

- The ORB is the core of the architecture
 - Connects clients to object implementations
 - Conceptually spans multiple machines (in practice, ORB software runs on each machine)

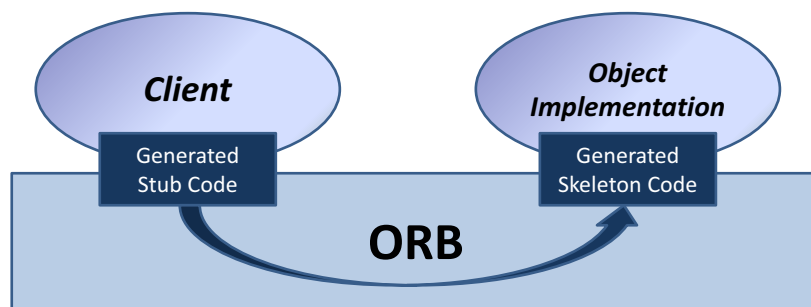

5

Invoking Objects

- Clients obtain an **object reference**
 - Typically via the **naming service** or **trading service**
 - (Object references can also be saved for use later)
- Interfaces defined by CORBA IDL
- Clients can call remote methods in 2 ways:
 1. **Static Invocation:** using stubs built at compile time (just like with RPC)
 2. **Dynamic Invocation:** actual method call is created on the fly. It is possible for a client to discover new objects at run time and access the object methods

6

CORBA IDL

- Definition of language-independent remote interfaces
 - **Language mappings** to C++, Java, Smalltalk, ...
 - Translation by IDL compiler
- Type system
 - *basic types*: long (32 bit), long long (64 bit), short, float, char, boolean, octet, any, ...
 - *constructed types*: struct, union, sequence, array, enum
 - *objects* (common super type **Object**)
- Parameter passing
 - **in, out, inout** (= send remote, modify, update)
 - basic & constructed types passed by value
 - objects passed by reference

7

CORBA Pros and Cons

- CORBA has some unique advantages
 - Industry standard (OMG)
 - Language & OS agnostic: mix and match
 - Richer than simple RPC (e.g. interface repository, implementation repository, DLL support, ...)
 - Many additional services (trading & naming, events & notifications, security, transactions, ...)
- However:
 - Really, really complicated / ugly / buzzwordy
 - Poor interoperability, at least at first
 - Generally to be avoided unless you need it!

8

Microsoft DCOM (1996)

- An alternative to CORBA:
 - MS had invested in COM (object-oriented local IPC scheme) so didn't fancy moving to OMA
- **Service Control Manager (SCM)** on each machine responsible for object creation, invocation, ...
 - essentially a lightweight 'ORB'
- Added remote operation using MSRPC:
 - based on DCE RPC, but extended to support objects
 - augmented IDL called MIDL: DCE IDL + objects
 - requests include interface pointer IDs (IPIDs) to identify object & interface to be invoked

9

DCOM vs. CORBA

- Both are language neutral, and object-oriented
- DCOM supports **objects with multiple interfaces**
 - but not, like CORBA, multiple inheritance of interfaces
- DCOM handles **distributed garbage collection**:
 - remote objects are reference counted (via explicit calls)
 - ping protocol handles abnormal client termination
- DCOM is widely used (e.g. SMB/CIFS, RDP, ...)
- But DCOM is MS proprietary (not standard)...
 - and no support for exceptions (return-code based)..
 - and lacks many of CORBA's services (e.g. trading)
- Deprecated today in favor of .NET

10

Java RMI

- 1995: Sun extended Java to allow RMI
 - RMI = **Remote Method Invocation**
- Essentially an OOM scheme for Java with clients, servers and an **object registry**
 - object registry maps from names to objects
 - supports **bind()/rebind(), lookup(), unbind(), list()**
- RMI was designed for Java only
 - no goal of OS or language interoperability
 - hence cleaner design, tighter language integration
 - E.g., distributed garbage collection

11

RMI: new classes

- **remote class:**
 - one whose instances can be used remotely
 - within home address space, a regular object
 - within foreign address spaces, referenced indirectly via an **object handle**
- **serializable class:** [nothing to do with transactions!]
 - object that can be marshalled/unmarshalled
 - if a serializable object is passed as a parameter or return value of a remote method invocation, the value will be copied from one address space to another
 - (for remote objects, only the object handle is copied)

12

RMI: new classes

- **remote class:**

- one whose instances can be used remotely
- within same address space, a regular object
- within different address space, indirectly via an **object handle**

**needed for remote objects
(when passing references)**


- **serializable class:**

- object that can be marshalled/unmarshalled
- if a serializable object is passed as a parameter or return value, the value will be copied from one address space to another
- (for remote objects, only the object handle is copied)

**needed for parameters
(when passing data)**

13

RMI: the big picture

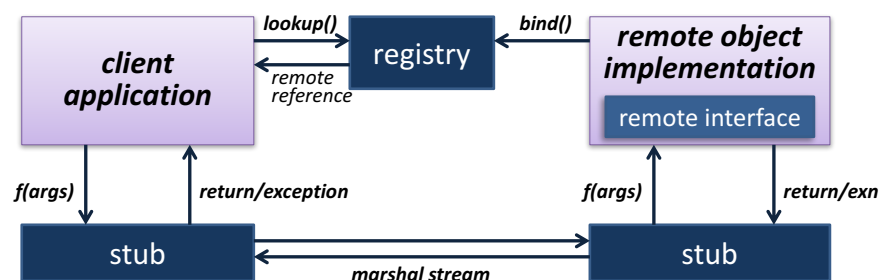

- Registry can be on server... or one per distributed system
 - client and server can find it via the **LocateRegistry** class
- Objects being serialized are annotated with a URL for the class
 - unless they implement **Remote** => replaced with a remote reference

14

Distributed garbage collection

- With RMI, can have local & remote object references scattered around a set of machines
- Build **distributed garbage collection** over local GC:
 - When a server exports object **O**, it creates a skeleton **S[O]**
 - When a client obtains a remote reference to **O**, it creates a proxy object **P[O]**, and remotely invokes **dirty(O)**
 - Local GC will track the liveness of **P[O]**; when it is locally unreachable, client remotely invokes **clean(O)**
 - If server notices no remote references, can free **S[O]**
 - If **S[O]** was last reference to **O**, then it too can be freed
- Like DCOM, server removes a reference if it doesn't hear from that client for a while (default 10 mins)

15

OOM: summary

- OOM enhances RPC with objects
 - types, interfaces, exceptions, ...
- Seen CORBA, DCOM and Java RMI
 - All plausible, and all still used today
 - CORBA most general (language and OS agnostic), but also the most complex: design by committee
 - DCOM is MS-only; being phased out for .NET
 - Java RMI decent starting point for simple distributed systems... but lacks many features
 - (EJB is a modern CORBA/RMI/<stuff> megalith)

16

XML-RPC

- Systems seen so far all developed by large industry, and work fine in the local area...
 - But don't (or didn't) do well through firewalls ;-)
- In 1998, Dave Winer developed XML-RPC
 - Use XML to encode method invocations (method names, parameters, etc)
 - Use HTTP POST to invoke; response contains the result, also encoded in XML
 - Looks like a regular web session, and so works fine with firewalls, NAT boxes, transparent proxies, ...

17

XML-RPC example

XML-RPC Request

```
<?xml version="1.0"?>
<methodCall>
<methodName>util.InttoString</methodName>
<params>
<param>
<value><i4>55</i4></value>
</param>
</params>
</methodCall>
```

XML-RPC Response

```
<?xml version="1.0"?>
<methodResponse>
<params>
<param>
<value><string>Fifty Five</string></value>
</param>
</params>
</methodResponse>
```

- Client side names method (as a string), and lists parameters, tagged with simple types
- Server receives message (via HTTP), decodes, performs operation, and replies with similar XML
- Inefficient & weakly typed... but simple, language agnostic, extensible, and eminently practical!

18

SOAP & web services

- XML-RPC was a victim of its own success
- WWW consortium decided to embrace it, extend it, and generally simplify it up
 - SOAP (**Simple Object Access Protocol**) is basically XML-RPC, but with more XML bits
 - Support for namespaces, user-defined types, multi-hop messaging, recipient specification, ...
 - Also allows transport over SMTP (!), TCP & UDP
- SOAP is part of the **Web Services** world
 - As complex as CORBA, but with more XML ;-)

19

Moving away from RPC

- SOAP 1.2 defined in 2003
 - Less focus on RPC, and more on moving XML messages from A to B (perhaps via C & D)
- One major problem with all RPC schemes is that they were synchronous:
 - Client is blocked until server replies
 - Poor responsiveness, particularly in wide area
- 2006 saw introduction of AJAX
 - **Asynchronous Javascript with XML**
 - Chief benefit: can update web page without reloading
- Examples: Google Maps, Gmail, Google Docs, ...

20

Representational State Transfer (REST)

- AJAX still does RPC (just asynchronously)
- Is a procedure call / method invocation really the best way to build distributed systems?
- **Representational State Transfer (REST)** is an alternative 'paradigm' (or a throwback?)
 - Resources have a name: URL or URI
 - Manipulate them via POST (create), GET (select), PUT (create/overwrite), and DELETE (delete)
 - More recently added: PATCH (partial update in place)
 - Send state along with operations
- Very widely used today (Amazon, Flickr, Twitter)

21

Client-server interaction: summary

- Server handles requests from client
 - Simple request/response protocols (like HTTP) useful, but lack language integration
 - RPC schemes (SunRPC, DCE RPC) address this
 - OOM schemes (CORBA, DCOM, RMI) extend RPC to understand objects, types, interfaces, exns, ...
- Recent WWW developments move away from traditional RPC/RMI:
 - Avoid explicit IDLs since can slow evolution
 - Enable asynchrony, or return to request/response

22

Clocks and distributed time

- Distributed systems need to be able to:
 - **order events** produced by concurrent processes;
 - **synchronize** senders and receivers of messages;
 - **serialize** concurrent accesses to shared objects; and
 - generally **coordinate** joint activity
- This can be provided by some sort of “clock”:
 - **physical clocks** keep time of day
 - (must be kept consistent across multiple nodes – why?)
 - **logical clocks** keep track of event ordering
- Relativity can't be ignored: think satellites

23

Physical clock technology

- Quartz Crystal Clocks (1929)
 - resonator shaped like a tuning fork
 - laser-trimmed to vibrate at 32,768 Hz
 - standard resonators accurate to 6ppm at 31°C... so will gain/lose around 0.5 seconds per day
 - stability better than accuracy (about 2s/month)
 - best resonators get accuracy of ~1s in 10 years
- Atomic clocks (1948)
 - count transitions of the cesium 133 atom
 - 9,192,631,770 periods defined to be 1 second
 - accuracy is better than 1 second in 6 million years...

24

Coordinated Universal Time (UTC)

- Physical clocks provide 'ticks' but we want to know the actual time of day
 - determined by astronomical phenomena
- Several variants of universal time
 - **UT0**: mean solar time on Greenwich meridian
 - **UT1**: UT0 corrected for polar motion; measured via observations of quasars, laser ranging, & satellites
 - **UT2**: UT1 corrected for seasonal variations
 - **UTC**: civil time, tracked using atomic clocks, but kept within 0.9s of UT1 by occasional leap seconds

25

Computer clocks

- Typically have a **Real-Time Clock (RTC)**
 - CMOS clock driven by a quartz oscillator
 - battery-backed so continues when power is off
- Also have range of other clocks (PIT, ACPI, HPET, TSC, ...), mostly **higher frequency**
 - free running clocks driven by quartz oscillator
 - mapped to real time by OS at boot time
 - programmable to generate interrupts after some number of ticks (~= some amount of real time)

26

Operating-system use of clocks

- OSes use time for many things
 - Periodic events – e.g., time sharing, statistics, at, cron
 - Local I/O functions – e.g., peripheral timeouts; entropy
 - Network protocols – e.g., TCP DELACK, retries, keep-alive
 - Cryptographic certificate/ticket generation, expiration
 - Performance profiling and sampling features
- “Ticks” trigger interrupts
 - Historically, timers at fixed intervals (e.g., 100Hz)
 - Now, “tickless”: timer reprogrammed for next event
 - Saves energy, CPU resources – especially as cores scale up

Which of these require **physical time** vs **logical time**? What will happen to each if the real-time clock drifts or steps due to synchronization?

Summary + next time (!)

- Object-Oriented Middleware (OOM)
 - CORBA, DCOM, RMI, XML-RPC, SOAP, REST
- Clocks and distributed time
 - Physical clock technology, UTC
 - What clocks in computers are for...
- More on physical time
- Time synchronization
- Ordering
 - The “**happens-before**” relation
 - Logical and vector clocks