

What’s yours and what’s mine: Determining Intellectual Attribution in Scientific Text

Simone Teufel[†]
Computer Science Department
Columbia University
teufel@cs.columbia.edu

Marc Moens
HCRC Language Technology Group
University of Edinburgh
Marc.Moens@ed.ac.uk

Abstract

We believe that identifying the structure of scientific argumentation in articles can help in tasks such as automatic summarization or the automated construction of citation indexes. One particularly important aspect of this structure is the question of who a given scientific statement is attributed to: other researchers, the field in general, or the authors themselves.

We present the algorithm, its implementation, and a systematic evaluation of a system which can recognize the most salient textual properties that contribute to the global argumentative structure of a text. In this paper we concentrate on two particular features, namely the occurrences of prototypical agents and their actions in scientific text.

1 Introduction

When writing an article, one does not normally go straight to presenting the innovative scientific claim. Instead, one establishes other, well-known scientific facts first, which are contributed by other researchers. Attribution of ownership often happens explicitly, by phrases such as “*Chomsky (1965) claims that*”. The question of intellectual attribution is important for researchers: not understanding the argumentative status of part of the text is a common problem for non-experts reading highly specific texts aimed at experts (Rowley, 1982). In particular, after reading an article, researchers need to know who holds the “knowledge claim” for a certain fact that interests them.

We propose that segmentation according to intellectual ownership can be done automatically, and that such a segmentation has advantages for various shallow text understanding tasks. At the heart of our classification scheme is the following trisection:

- BACKGROUND (generally known work)
- OWN, new work and
- specific OTHER work.

The advantages of a segmentation at a rhetorical level is that rhetorics is conveniently constant

[†]This work was done while the first author was at the HCRC Language Technology Group, Edinburgh.

BACKGROUND:

Researchers in knowledge representation agree that one of the hard problems of understanding narrative is the representation of temporal information. Certain facts of natural language make it hard to capture temporal information [...]

OTHER WORK:

Recently, **Researcher-4** has **suggested** the following solution to this problem [...].

WEAKNESS/CONTRAST:

But **this solution cannot be used** to interpret the following Japanese examples: [...]

OWN CONTRIBUTION:

We propose a solution which **circumvents** this problem while retaining the explanatory power of Researcher-4’s approach.

Figure 1: Fictional introduction section

across different articles—subject matter, on the contrary is not, nor are writing style and other factors. We work with a corpus of scientific papers (80 computational linguistics conference articles (ACL, EACL, COLING or ANLP), deposited on the CML_LG archive between 1994 and 1996). This is a difficult test bed due to the large variation with respect to different factors: subdomain (theoretical linguistics, statistical NLP, logic programming, computational psycholinguistics), types of research (implementation, review, evaluation, empirical vs. theoretical research), writing style (formal vs. informal; use of passive vs. active) and presentational styles (fixed section structure of type Introduction–Method–Results–Conclusion vs. more idiosyncratic, problem-structured presentation).

One thing, however, is constant across all articles: the argumentative aim of every single article is to show that the given work is a contribution to science (Swales, 1990; Myers, 1992; Hyland, 1998). Theories of scientific argumentation in research articles stress that authors follow well-predictable stages of argumentation, as in the fictional introduction in figure 1.

Our hypothesis is that a segmentation based on

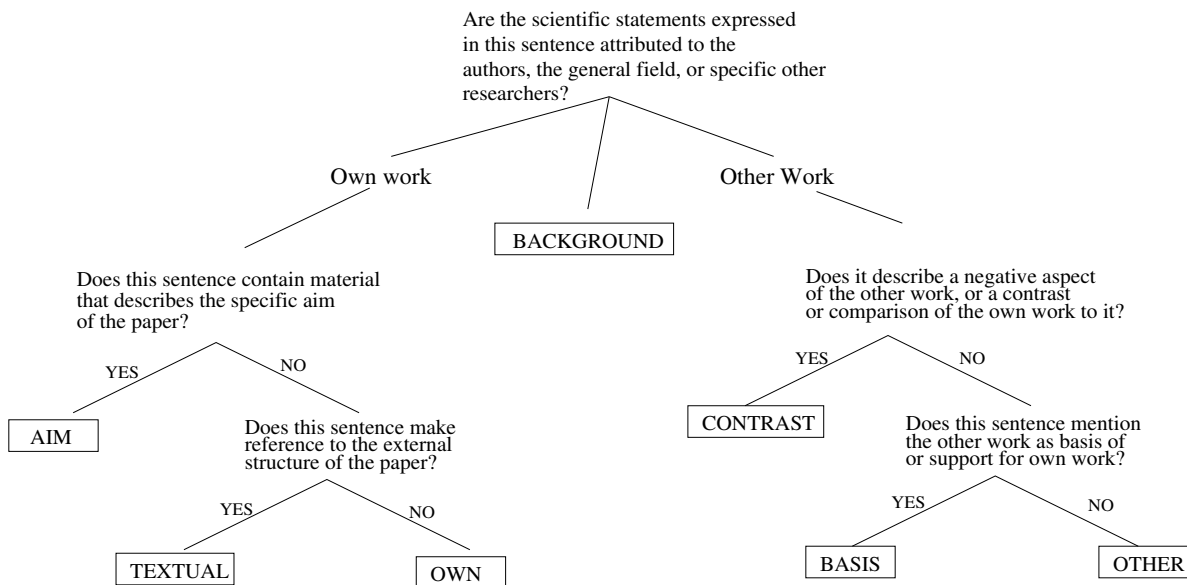


Figure 2: Annotation Scheme for Argumentative Zones

regularities of scientific argumentation and on attribution of intellectual ownership can provide one of the most stable and generalizable descriptions of the structure of scientific texts. In the next section we will describe an annotation scheme which we designed for capturing these effects. It is based on Swales’ (1990) CARS model.

1.1 The scheme

As our corpus contains many statements talking about *relations* between own and other work, we decided to add two classes (“zones”) for expressing relations to the core set of OWN, OTHER and BACKGROUND, namely contrastive statements (CONTRAST; comparable to Swales’ (1990) move 2A/B) and statements of intellectual ancestry (BASIS; Swales’ move 2D). The label OTHER is thus reserved for neutral descriptions of other work. OWN segments are further subdivided to mark explicit aim statements (AIM; Swales’ move 3.1A/B), and explicit section previews (TEXTUAL; Swales’ move 3.3). All other statements about the own work are classified as OWN. Each of the seven category covers one sentence.

Our classification, which is a further development of the scheme in Teufel and Moens (1999), can be described procedurally as a decision tree (Figure 2), where five questions are asked about each sentence, concerning intellectual attribution, author stance and continuation vs. contrast. Figure 3 gives typical example sentences for each zone.

The intellectual-attribution distinction we make is comparable with Wiebe’s (1994) distinction into subjective and objective statements. Subjectivity is a property which is related to the attribution of authorship as well as to author stance, but it is just one of the dimensions we consider.

Which practical use would segmenting a paper into argumentative zones have?

Firstly, rhetorical information as encoded in these zones should prove useful for summarization. Sentence extracts, still the main type of summarization around, are notoriously context-insensitive. Context in the form of argumentative relations of segments to the overall paper could provide a skeleton by which to tailor sentence extracts to user expertise (as certain users or certain tasks do not require certain types of information). A system which uses such rhetorical zones to produce task-tailored extracts for medical articles, albeit on the basis of manually-segmented texts, is given by Wellons and Purcell (1999).

Another hard task is high compression sentence selection of long scientific articles, because one has to make decisions about how the extracted sentences relate to each other and how they relate to the overall message of the text, before one can further compress them. Rhetorical context of the kind described above is very likely to make these decisions easier.

Secondly, it should also help improve citation indexes, e.g. automatically derived ones like Lawrence et al.’s (1999) and Nanba and Okumura’s (1999). Citation indexes help organize scientific online literature by linking cited (outgoing) and citing (incoming) articles with a given text. But these indexes are mainly “quantitative”, listing other works without further qualifying whether a reference to another work is there to extend the earlier work, correct it, point out a weakness in it, or just provide it as general background. This “qualitative” information could be directly contributed by our argumentative zones.

In this paper, we will describe our implementa-

AIM	<i>“We have proposed a method of clustering words based on large corpus data.”</i>
TEXTUAL	<i>“Section 2 describes three unification-based parsers which are...”</i>
OWN	<i>“We also compare with the English language and draw some conclusions on the benefits of our approach.”</i>
BACKGROUND	<i>“Part-of-speech tagging is the process of assigning grammatical categories to individual words in a corpus.”</i>
CONTRAST	<i>“However, no method for extracting the relationships from superficial linguistic expressions was described in their paper.”</i>
BASIS	<i>“Our disambiguation method is based on the similarity of context vectors, which was originated by Wilks et al. 1990.”</i>
OTHER	<i>“Strzalkowski’s Essential Arguments Approach (EAA) is a top-down approach to generation...”</i>

Figure 3: Examples for Argumentative Zones

tion of an argumentative zoner. The main focus of the paper is the description of two features which are particularly useful for attribution determination: prototypical agents and actions.

2 Human Annotation of Argumentative Zones

We have previously evaluated the scheme empirically by extensive experiments with three subjects, over a range of 48 articles (Teufel et al., 1999). We measured *stability* (the degree to which the same annotator will produce an annotation after 6 weeks) and *reproducibility* (the degree to which two unrelated annotators will produce the same annotation), using the Kappa coefficient K (Siegel and Castellan, 1988; Carletta, 1996), which controls agreement $P(A)$ for chance agreement $P(E)$:

$$K = \frac{P(A) - P(E)}{1 - P(E)}$$

Kappa is 0 for if agreement is only as would be expected by chance annotation following the same distribution as the observed distribution, and 1 for perfect agreement. Values of Kappa surpassing .8 are typically accepted as showing a very high level of agreement (Krippendorff, 1980; Landis and Koch, 1977).

Our experiments show that humans can distinguish own, other specific and other general work with high stability ($K=.83, .79, .81$; $N=1248$; $k=2$, where K stands for the Kappa coefficient, N for the number of items (sentences) annotated and k for the number of annotators) and reproducibility ($K=.78$, $N=4031$, $k=3$), corresponding to 94%, 93%, 93% (stability) and 93% (reproducibility) agreement.

The full distinction into all seven categories of the annotation scheme is slightly less stable and reproducible (stability: $K=.82, .81, .76$; $N=1220$; $k=2$ (equiv. to 93%, 92%, 90% agreement); reproducibility: $K=.71$, $N=4261$, $k=3$ (equiv. to 87% agreement)), but still in the range of what is generally accepted as reliable annotation. We conclude from this that humans can distinguish attribution and full argumentative zones, if trained. Human

annotation is used as training material in our statistical classifier.

3 Automatic Argumentative Zoning

As our task is not defined by topic coherence like the related tasks of Morris and Hirst (1991), Hearst (1997), Kan et al. (1998) and Reynar (1999), we predict that keyword-based techniques for automatic argumentative zoning will not work well. Indeed, text categorization based on the words in the sentences (where each sentence is considered as a document*) performs badly at 69% accuracy, considering that the most frequent category (OWN) covers 69% of all sentences. Worse still, the classifier classifies almost all sentences as OWN and OTHER segments (the most frequent categories). Recall on the rare categories but important categories AIM, TEXTUAL, CONTRAST and BASIS is zero or very low. Text classification is therefore not a solution.

We decided to perform machine learning, based on sentential features like the ones used by sentence extraction. Argumentative zones have properties which help us determine them on the surface:

- Zones appear in typical positions in the article (Myers, 1992); we model this with a set of location features.
- Linguistic features like tense and voice correlate with zones (Biber (1995) and Riley (1991) show correlation for similar zones like “method” and “introduction”). We model this with syntactic features.
- Zones tend to follow particular other zones (Swales, 1990); we model this with an ngram model operating over sentences.
- Beginnings of attribution zones are linguistically marked by meta-discourse like *“Other researchers claim that”* (Swales, 1990; Hyland, 1998); we model this with a specialized

*We used the Rainbow implementation of a Naive Bayes tf/idf method, 10-fold cross-validation.

agents and actions recognizer, and by recognizing formal citations.

- Statements without explicit attribution are interpreted as being of the same attribution as previous sentences in the same segment of attribution; we model this with a modified agent feature which keeps track of previously recognized agents.

3.1 Recognizing Agents and Actions

Paice (1981) introduces grammars for pattern matching of indicator phrases, e.g. “*the aim/purpose of this paper/article/study*” and “*we conclude/propose*”. Such phrases can be useful indicators of overall importance. However, for our task, more flexible meta-discourse expressions need to be determined. The description of a research tradition, or the statement that the work described in the paper is the continuation of some other work, cover a wide range of syntactic and lexical expressions and are too hard to find for a mechanism like simple pattern matching.

Agent Type	Example
US_AGENT	<i>we</i>
THEM_AGENT	<i>his approach</i>
GENERAL_AGENT	<i>traditional methods</i>
US_PREVIOUS_AGENT	<i>the approach given in X (99)</i>
OUR_AIM_AGENT	<i>the point of this study</i>
REF_US_AGENT	<i>this paper</i>
REF_AGENT	<i>the paper</i>
THEM_PRONOUN_AGENT	<i>they</i>
AIM_REF_AGENT	<i>its goal</i>
GAP_AGENT	<i>none of these papers</i>
PROBLEM_AGENT	<i>these drawbacks</i>
SOLUTION_AGENT	<i>a way out of this dilemma</i>
TEXTSTRUCTURE_AGENT	<i>the concluding chapter</i>

Figure 4: Agent Lexicon: 168 Patterns, 13 Classes

We suggest that the robust recognition of *prototypical* agents and actions is one way out of this dilemma. The agents we propose to recognize describe fixed role-players in the argumentation. In Figure 1, prototypical agents are given in bold-face (“**Researchers** in knowledge representation, “**Researcher-4**” and “**we**”). We also propose prototypical actions frequently occurring in scientific discourse (shown underlined in Figure 1): the researchers “agree”, Researcher-4 “suggested” something, the solution “cannot be used”.

We will now describe an algorithm which recognizes and classifies agents and actions. We use a manually created lexicon for patterns for agents, and a manually clustered verb lexicon for the verbs. Figure 4 lists the agent types we distinguish. The main three types are US_AGENT, THEM_AGENT and GENERAL_AGENT. A fourth

type is US_PREVIOUS_AGENT (the authors, but in a *previous* paper).

Additional agent types include non-personal agents like aims, problems, solutions, absence of solution, or textual segments. There are four equivalence classes of agents with ambiguous reference (“*this system*”), namely REF_US_AGENT, THEM_PRONOUN_AGENT, AIM_REF_AGENT, REF_AGENT. The total of 168 patterns in the lexicon expands to many more as we use a replace mechanism (@WORK_NOUN is expanded to “*paper, article, study, chapter*” etc).

For verbs, we use a manually created the action lexicon summarized in Figure 6. The verb classes are based on semantic concepts such as similarity, contrast, competition, presentation, argumentation and textual structure. For example, PRESENTATION_ACTIONS include communication verbs like “*present*”, “*report*”, “*state*” (Myers, 1992; Thompson and Yiyun, 1991), RESEARCH_ACTIONS include “*analyze*”, “*conduct*” and “*observe*”, and ARGUMENTATION_ACTIONS “*argue*”, “*disagree*”, “*object to*”. Domain-specific actions are contained in the classes indicating a problem (“*fail*”, “*degrade*”, “*overestimate*”), and solution-contributing actions (“*circumvent*”, “*solve*”, “*mitigate*”).

The main reason for using a hand-crafted, genre-specific lexicon instead of a general resource such as WordNet or Levin’s (1993) classes (as used in Klavans and Kan (1998)), was to avoid polysemy problems without having to perform word sense disambiguation. Verbs in our texts often have a specialized meaning in the domain of scientific argumentation, which our lexicon readily encodes. We did notice some ambiguity problems (e.g. “*follow*” can mean following another approach, or it can mean follow in a sense having nothing to do with presentation of research, e.g. following an arc in an algorithm). In a wider domain, however, ambiguity would be a much bigger problem.

Processing of the articles includes transformation from L^AT_EX into XML format, recognition of formal citations and author names in running text, tokenization, sentence separation and POS-tagging. The pipeline uses the TTT software provided by the HCRC Language Technology Group (Grover et al., 1999). The algorithm for determining agents in subject positions (or By-PPs in passive sentences) is based on a finite automaton which uses POS-input; cf. Figure 5.

In the case that more than one finite verb is found in a sentence, the first finite verb which has agents and/or actions in the sentences is used as a value for that sentence.

4 Evaluation

We carried out two evaluations. Evaluation A tests whether all patterns were recognized as intended by the algorithm, and whether patterns were found that should not have been recognized.

1. Start from the first finite verb in the sentence.
2. Check right context of the finite verb for verbal forms of interest which might make up more complex tenses. Remain within the assumed clause boundaries; do not cross commas or other finite verbs. Once the main verb of that construction (the “semantic” verb) has been found, a simple morphological analysis determines its lemma; the tense and voice of the construction follow from the succession of auxiliary verbs encountered.
3. Look up the lemma of semantic verb in Action Lexicon; return the associated Action Class if successful. Else return Action 0.
4. Determine if one of the 32 fixed negation words contained in the lexicon (e.g. “not, don’t, neither”) is present within a fixed window of 6 to the right of the finite verb.
5. Search for the agent either as a by-PP to the right, or as a subject-NP to the left, depending on the voice of the construction as determined in step 2. Remain within assumed clause boundaries.
6. If one of the Agent Patterns matches within that area in the sentence, return the Agent Type. Else return Agent 0.
7. Repeat Steps 1–6 until there are no more finite verbs left.

Figure 5: Algorithm for Agent and Action Detection

Action Type	Example	Action Type	Example
AFFECT	<i>we <u>hope</u> to improve our results</i>	NEED	<i>this approach, however, <u>lacks</u>...</i>
ARGUMENTATION	<i>we <u>argue</u> against a model of</i>	PRESENTATION	<i>we <u>present</u> here a method for...</i>
AWARENESS	<i>we <u>are not aware of</u> attempts</i>	PROBLEM	<i>this approach <u>fails</u>...</i>
BETTER_SOLUTION	<i>our system <u>outperforms</u> ...</i>	RESEARCH	<i>we <u>collected</u> our data from...</i>
CHANGE	<i>we <u>extend</u> <CITE/>’s algo- rithm</i>	SIMILAR	<i>our approach <u>resembles</u> that of</i>
COMPARISON	<i>we <u>tested</u> our system against...</i>	SOLUTION	<i>we <u>solve</u> this problem by...</i>
CONTINUATION	<i>we <u>follow</u> <REF/> ...</i>	TEXTSTRUCTURE	<i>the paper <u>is</u> organized...</i>
CONTRAST	<i>our approach <u>differs from</u> ...</i>	USE	<i>we <u>employ</u> <REF/>’s method...</i>
FUTURE_INTEREST	<i>we <u>intend</u> to improve ...</i>	COPULA	<i>our goal <u>is</u> to...</i>
INTEREST	<i>we <u>are concerned with</u> ...</i>	POSSESSION	<i>we <u>have</u> three goals...</i>

Figure 6: Action Lexicon: 366 Verbs, 20 Classes

Evaluation B tests how well agent and action recognition helps us perform argumentative zoning automatically.

4.1 Evaluation A: Correctness

We first manually evaluated the error level of the POS-Tagging of finite verbs, as our algorithm crucially relies on finite verbs. In a random sample of 100 sentences from our corpus (containing a total of 184 finite verbs), the tagger showed a recall of 95% and a precision of 93%.

We found that for the 174 correctly determined finite verbs (out of the total 184), the heuristics for negation worked without any errors (100% accuracy). The correct semantic verb was determined in 96% percent of all cases; errors are mostly due to misrecognition of clause boundaries. Action Type lookup was fully correct, even in the case of phrasal verbs and longer idiomatic expressions (“have to” is a NEED_ACTION; “be inspired by” is a CONTINUE_ACTION). There were 7 voice errors, 2 of which were due to POS-tagging errors (past participle misrecognized). The remaining 5 voice errors correspond to a 98% accuracy. Figure 7 gives an example for a voice error (underlined) in the output of the action/agent determination.

```

At the point where John <ACTION
TENSE=PRESENT          VOICE=ACTIVE
MODAL=NOMODAL          NEGATION=0
ACTIONTYPE=0> knows </ACTION> the truth
has been <FINITE TENSE=PRESENT_PERFECT
VOICE=PASSIVE MODAL=NOMODAL NEGA-
TION=0 ACTIONTYPE=0> processed
</ACTION> , a complete clause will have
been <ACTION TENSE=FUTURE_PERFECT
VOICE=ACTIVE MODAL=NOMODAL NEGA-
TION=0 ACTIONTYPE=0> built </ACTION>
.

```

Figure 7: Sample Output of Action Detection

Correctness of Agent Type determination was tested on a random sample of 100 sentences containing at least one agent, resulting in 111 agents. No agent pattern that should have been identified was missed (100% recall). Of the 111 agents, 105 cases were completely correct: the agent pattern covered the *complete* grammatical subject or by-PP intended (precision of 95%). There was one complete error, caused by a POS-tagging error. In 5 of the 111 agents, the pattern covered only *part* of a subject NP (typically the NP in a postmodify-

ing PP), as in the phrase “*the problem with these approaches*” which was classified as REF_AGENT. These cases (counted as errors) indeed constitute no grave errors, as they still give an indication which type of agents the nominal phrase is associated with.

4.2 Evaluation B: Usefulness for Argumentative Zoning

We evaluated the usefulness of the Agent and Action features by measuring if they improve the classification results of our stochastic classifier for argumentative zones.

We use 14 features given in figure 8, some of which are adapted from sentence extraction techniques (Paice, 1990; Kupiec et al., 1995; Teufel and Moens, 1999).

- | |
|---|
| <ol style="list-style-type: none"> 1. Absolute location of sentence in document 2. Relative location of sentence in section 3. Location of a sentence in paragraph 4. Presence of citations 5. Location of citations 6. Type of citations (self citation or not) 7. Type of headline 8. Presence of tf/idf key words 9. Presence of title words 10. Sentence length 11. Presence of modal auxiliaries 12. Tense of the finite verb 13. Voice of the finite verb 14. Presence of Formulaic Expressions |
|---|

Figure 8: Other features used

All features except **Citation Location** and **Citation Type** proved helpful for classification. Two different statistical models were used: a Naive Bayesian model as in Kupiec et al.’s (1995) experiment, cf. Figure 9, and an ngram model over sentences, cf. Figure 10. Learning is supervised and training examples are provided by our previous human annotation. Classification proceeds sentence by sentence. The ngram model combines evidence from the context (C_{m-1}, C_{m-2}) and from l sentential features ($F_{m,0} \dots F_{m,l-1}$), assuming that those two factors are independent of each other. It uses the same likelihood estimation as the Naive Bayes, but maximises a context-sensitive prior using the Viterbi algorithm. We received best results for $n=2$, i.e. a bigram model.

The results of stochastic classification were compiled with a 10-fold cross-validation on our 80-paper corpus. As baseline we consider the result of a text categorization run on the sentences, as mentioned above. NB refers to the Naive Bayes model, NB+ to the Naive Bayes model augmented with the ngram model.

One of our baselines is given by the text categorization experiment mentioned above, the other by the most frequent category (OWN). We see

that Kappa (measured against one human annotator, i.e. $k=2$) measures performance far more intuitively than percentage accuracy does. Baseline 2 is a particularly bad baseline as its recall on all categories except OWN is zero.

Figure 11 shows that the stochastic models obtain substantial improvement over the baselines, particularly with respect to precision and recall of the rare categories, raising recall considerably in all cases, while keeping precision at the same level as Baseline 1 or improving it (exception: precision for BASIS drops; precision for AIM is insignificantly lower).

If we look at the contribution of single features (reported for the Naive Bayes system in figure 12), we see that **Agent** and **Action** features improve the overall performance of the system by .02 and .04 Kappa points respectively (.36 to .38/.40). This is a good performance for single features. **Agent** is a strong feature beating both baselines. Seen by itself, its performance at $K=.08$ is still weaker than some other features in the pool, e.g. the **Headline** feature ($K=.19$), the **Citation** feature ($K=.18$) and the **Absolute Location** Feature ($K=.17$). (Figure 12 reports classification results only for the stronger features, i.e. those who are better than Baseline 2). The **Action** feature, if considered on its own, is rather weak: it shows a slightly better Kappa value than Baseline 2, but does not even reach the level of random agreement ($K=0$). Nevertheless, if taken together with the other features, it still improves results.

Building on the idea that intellectual attribution is a segment-based phenomena, we improved the **Agent** feature by including history (feature **SAgent**). The assumption is that in unmarked sentences the agent of the previous attribution is still active. Wiebe (1994) also reports segment-based agenthood as one of the most successful features. **SAgent** alone achieved a classification success of $K=.21$, which makes **SAgent** the best single features available in the entire feature pool. Inclusion of **SAgent** to the final model improved results to $K=.43$ (bigram model).

Figure 12 also shows that different features are better at disambiguating certain categories. The **Formulaic** feature, which is not very strong on its own, is the most diverse, as it contributes to the disambiguation of six categories directly. Both **Agent** and **Action** features disambiguate categories which many of the other 12 features cannot disambiguate (e.g. **CONTRAST**), and **SAgent** additionally contributes towards the determination of **BACKGROUND** zones (along with the **Formulaic** and the **Absolute Location** feature).

5 Discussion

The result for automatic classification is in agreement with our previous experimental results for human classification: humans, too, recognize the categories AIM and TEXTUAL most robustly (cf.

$$P(C|F_0, \dots, F_{n-1}) \approx P(C) \frac{\prod_{j=0}^{n-1} P(F_j|C)}{\prod_{j=0}^{n-1} P(F_j)}$$

$P(C F_0, \dots, F_{n-1})$:	Probability that a sentence has target category C , given its feature values F_0, \dots, F_{n-1} ;
$P(C)$:	(Overall) probability of category C ;
$P(F_j C)$:	Probability of feature-value pair F_j , given that the sentence is of target category C ;
$P(F_j)$:	Probability of feature value F_j ;

Figure 9: Naive Bayesian Classifier

$$P(C_m|F_{m,0}, \dots, F_{m,l-1}, C_0, \dots, C_{m-1}) \approx P(C_m|C_{m-1}, C_{m-2}) \frac{\prod_{j=0}^{l-1} P(F_{m,j}|C_m)}{\prod_{j=0}^{l-1} P(F_{m,j})}$$

m :	index of sentence (m th sentence in text)
l :	number of features considered
C_m :	target category associated with sentence at index m
$P(C_m F_{m,0}, \dots, F_{m,l-1}, C_0, \dots, C_{m-1})$:	Probability that sentence m has target category C_m , given its feature values $F_{m,0}, \dots, F_{m,l-1}$ and given its context C_0, \dots, C_{m-1} ;
$P(C_m C_{m-1}, C_{m-2})$:	Probability that sentence m has target category C , given the categories of the two previous sentences;
$P(F_{m,j} C_m)$:	Probability of feature-value pair F_j occurring within target category C at position m ;
$P(F_{m,j})$:	Probability of feature value $F_{m,j}$;

Figure 10: Bigram Model

Figure 11). AIM and TEXTUAL sentences, stating knowledge claims and organizing the text respectively, are conventionalized to a high degree. The system’s results for AIM sentences, for instance, compares favourably to similar sentence extraction experiments (cf. Kupiec et al.’s (1995) results of 42%/42% recall and precision for extracting “relevant” sentences from scientific articles). BASIS and CONTRAST sentences have a less prototypical syntactic realization, and they also occur at less predictable places in the document. Therefore, it is far more difficult for both machine and human to recognize such sentences.

While the system does well for AIM and TEXTUAL sentences, and provides substantial improvement over both baselines, the difference to human performance is still quite large (cf. figure 11). It is unlikely that lexical information, as exploited by topic-segmentation methods is of much practical value, as our experiment with text categorization showed. The simplicity of our statistical models also does not seem to be the problem; we tested different other statistical models, e.g. Ripper (Cohen, 1996) and a Maximum Entropy model, which all showed similar numerical results when applied to our data.

On the one hand, it seems likely that the results would improve significantly with a larger training corpus, as 80 papers are not much for machine learning of such high-level features.

On the other hand, we discovered inconsisten-

cies in the training data: 4% of the sentences with the same features were classified differently by the human annotation. This points to the fact that our set of features could be made more distinctive. In most of these cases, there were linguistic expressions present, such as subtle signs of criticism, which humans correctly identified, but for which the features are too coarse. Therefore, the addition of “deeper” features to the pool, which model the semantics of the meta-discourse shallowly, seemed a promising avenue. We consider the automatic and robust recognition of agents and actions, as presented here, to be the first incarnations of such features.

6 Conclusions

Argumentative zoning is the task of breaking a text containing a scientific argument into linear zones of the same argumentative status, or zones of the same intellectual attribution. We plan to use argumentative zoning as a first step for IR and shallow document understanding tasks like summarization. In contrast to hierarchical segmentation (e.g. Marcu’s (1997) work, which is based on RST (Mann and Thompson, 1987)), this type of segmentation aims at capturing the argumentative status of a piece of text in respect to the overall argumentative act of the paper. It does not determine the rhetorical structure within zones. Sub-zone structure is most likely related to domain-specific rhetorical relations which are not directly

Method	Acc. (%)	K	Precision/recall per category (in %)						
			AIM	CONTR.	TXT.	OWN	BACKG.	BASIS	OTHER
Human Performance	87	.71	72/56	50/55	79/79	94/92	68/75	82/34	74/83
NB+ (best results)	71	.43	40/53	33/20	62/57	85/85	30/58	28/31	50/38
NB (best results)	72	.41	42/60	34/22	61/60	82/90	40/43	27/41	53/29
Basel. 1: Text categ.	69	.13	44/9	32/42	58/14	77/90	20/5	47/12	31/16
Basel. 2: Most freq. cat.	69	-.12	0/0	0/0	0/0	69/100	0/0	0/0	0/0

Figure 11: Accuracy, Kappa, Precision and Recall of Human and Automatic Processing, in comparison to baselines

Features used (Naive Bayes System)	Acc. (%)	K	Precision/recall per category (in %)						
			AIM	CONTR.	TXT.	OWN	BACKG.	BASIS	OTHER
Action alone	68	-.11	0/0	43/1	0/0	68/99	0/0	0/0	0/0
Agent alone	67	.08	0/0	0/0	0/0	71/93	0/0	0/0	36/23
SAgent alone	70	.21	0/0	17/0	0/0	74/94	53/16	0/0	46/33
Abs. Location alone	70	.17	0/0	0/0	0/0	74/97	40/36	0/0	28/9
Headlines alone	69	.19	0/0	0/0	0/0	75/95	0/0	0/0	29/25
Citation alone	70	.18	0/0	0/0	0/0	73/96	0/0	0/0	43/30
Citation Type alone	70	.13	0/0	0/0	0/0	72/98	0/0	0/0	43/24
Citation Locat. alone	70	.13	0/0	0/0	0/0	72/97	0/0	0/0	43/24
Formulaic alone	70	.07	40/2	45/2	75/39	71/98	0/0	40/1	47/13
12 other features	71	.36	37/53	32/17	54/47	81/91	39/41	22/32	45/22
12 fea.+Action	71	.38	38/57	34/22	58/59	81/91	39/40	25/38	48/22
12 fea.+Agent	72	.40	40/57	35/18	59/51	82/91	39/43	25/34	52/29
12 fea.+SAgent	73	.40	39/57	33/19	61/51	81/91	42/43	25/33	52/29
12 fea.+Action+Agent	71	.43	40/53	33/20	62/57	85/85	30/58	28/31	50/38
12 fea.+Action+SAgent	73	.41	41/59	34/22	62/61	82/91	41/42	27/39	51/29

Figure 12: Accuracy, Kappa, Precision and Recall of Automatic Processing (Naive Bayes system), per individual features

relevant to the discourse-level relations we wish to recognize.

We have presented a fully implemented prototype for argumentative zoning. Its main innovation are two new features: prototypical agents and actions — semi-shallow representations of the overall scientific argumentation of the article. For agent and action recognition, we use syntactic heuristics and two extensive libraries of patterns. Processing is robust and very low in error. We evaluated the system without and with the agent and action features and found that the features improve results for automatic argumentative zoning considerably. History-aware agents are the best single feature in a large, extensively tested feature pool.

References

- Biber, Douglas. 1995. *Dimensions of Register Variation: A Cross-linguistic Comparison*. Cambridge, England: Cambridge University Press.
- Carletta, Jean. 1996. Assessing agreement on classification tasks: The kappa statistic. *Computational Linguistics* 22(2): 249–254.
- Cohen, William W. 1996. Learning trees and rules with set-valued features. In *Proceedings of AAAI-96*.
- Grover, Claire, Andrei Mikheev, and Colin Mathe-son. 1999. LT TTT Version 1.0: Text Tokenisa-
tion Software. Technical report, Human Communication Research Centre, University of Edinburgh. <http://www.ltg.ed.ac.uk/software/ttt/>.
- Hearst, Marti A. 1997. TextTiling: Segmenting text into multi-paragraph subtopic passages. *Computational Linguistics* 23(1): 33–64.
- Hyland, Ken. 1998. Persuasion and context: The pragmatics of academic metadiscourse. *Journal of Pragmatics* 30(4): 437–455.
- Kan, Min-Yen, Judith L. Klavans, and Kathleen R. McKeown. 1998. Linear Segmentation and Segment Significance. In *Proceedings of the Sixth Workshop on Very Large Corpora (COLIN G/ACL-98)*, 197–205.
- Klavans, Judith L., and Min-Yen Kan. 1998. Role of verbs in document analysis. In *Proceedings of 36th Annual Meeting of the Association for Computational Linguistics and the 17th International Conference on Computational Linguistics (ACL/COLING-98)*, 680–686.
- Krippendorff, Klaus. 1980. *Content Analysis: An Introduction to its Methodology*. Beverly Hills, CA: Sage Publications.
- Kupiec, Julian, Jan O. Pedersen, and Francine Chen. 1995. A trainable document summarizer. In *Proceedings of the 18th Annual International Conference on Research and Development in Information Retrieval (SIGIR-95)*, 68–73.

- Landis, J.R., and G.G. Koch. 1977. The Measurement of Observer Agreement for Categorical Data. *Biometrics* 33: 159–174.
- Lawrence, Steve, C. Lee Giles, and Kurt Bollacker. 1999. Digital libraries and autonomous citation indexing. *IEEE Computer* 32(6): 67–71.
- Levin, Beth. 1993. *English Verb Classes and Alternations*. Chicago, IL: University of Chicago Press.
- Mann, William C., and Sandra A. Thompson. 1987. Rhetorical Structure Theory: Description and Construction of text structures. In Gerard Kempen, ed., *Natural Language Generation: New Results in Artificial Intelligence, Psychology, and Linguistics*, 85–95. Dordrecht, NL: Marinus Nijhoff Publishers.
- Marcu, Daniel. 1997. From Discourse Structures to Text Summaries. In Inderjeet Mani and Mark T. Maybury, eds., *Proceedings of the ACL/EACL-97 Workshop on Intelligent Scalable Text Summarization*, 82–88.
- Morris, Jane, and Graeme Hirst. 1991. Lexical cohesion computed by thesaural relations as an indicator of the structure of text. *Computational Linguistics* 17: 21–48.
- Myers, Greg. 1992. In this paper we report...—speech acts and scientific facts. *Journal of Pragmatics* 17(4): 295–313.
- Nanba, Hidetsugu, and Manabu Okumura. 1999. Towards multi-paper summarization using reference information. In *Proceedings of IJCAI-99*, 926–931. <http://galaga.jaist.ac.jp:8000/~nanba/study/papers.html>.
- Paice, Chris D. 1981. The automatic generation of literary abstracts: an approach based on the identification of self-indicating phrases. In Robert Norman Oddy, Stephen E. Robertson, Cornelis Joost van Rijsbergen, and P. W. Williams, eds., *Information Retrieval Research*, 172–191. London, UK: Butterworth.
- Paice, Chris D. 1990. Constructing literature abstracts by computer: techniques and prospects. *Information Processing and Management* 26: 171–186.
- Reynar, Jeffrey C. 1999. Statistical models for topic segmentation. In *Proceedings of the 37th Annual Meeting of the Association for Computational Linguistics (ACL-99)*, 357–364.
- Riley, Kathryn. 1991. Passive voice and rhetorical role in scientific writing. *Journal of Technical Writing and Communication* 21(3): 239–257.
- Rowley, Jennifer. 1982. *Abstracting and Indexing*. London, UK: Bingley.
- Siegel, Sidney, and N. John Jr. Castellan. 1988. *Non-parametric Statistics for the Behavioral Sciences*. Berkeley, CA: McGraw-Hill, 2nd edn.
- Swales, John. 1990. *Genre Analysis: English in Academic and Research Settings. Chapter 7: Research articles in English*, 110–176. Cambridge, UK: Cambridge University Press.
- Teufel, Simone, Jean Carletta, and Marc Moens. 1999. An annotation scheme for discourse-level argumentation in research articles. In *Proceedings of the 8th Meeting of the European Chapter of the Association for Computational Linguistics (EACL-99)*, 110–117.
- Teufel, Simone, and Marc Moens. 1999. Argumentative classification of extracted sentences as a first step towards flexible abstracting. In Inderjeet Mani and Mark T. Maybury, eds., *Advances in Automatic Text Summarization*, 155–171. Cambridge, MA: MIT Press.
- Thompson, Geoff, and Ye Yiyun. 1991. Evaluation in the reporting verbs used in academic papers. *Applied Linguistics* 12(4): 365–382.
- Wellons, M. E., and G. P. Purcell. 1999. Task-specific extracts for using the medical literature. In *Proceedings of the American Medical Informatics Symposium*, 1004–1008.
- Wiebe, Janyce. 1994. Tracking point of view in narrative. *Computational Linguistics* 20(2): 223–287.