

# The Isabelle System Manual

*Makarius Wenzel*

With Contributions by Fabian Huch

18 January 2026

---

# Contents

---

<b>1</b>	<b>The Isabelle system environment</b>	<b>1</b>
1.1	Isabelle settings . . . . .	1
1.1.1	Bootstrapping the environment . . . . .	1
1.1.2	Common variables . . . . .	2
1.1.3	Additional components . . . . .	5
1.2	The Isabelle tool wrapper . . . . .	6
1.3	The raw ML process . . . . .	7
1.3.1	The raw ML process as command-line tool . . . . .	7
1.3.2	Interactive mode . . . . .	9
1.4	The raw Isabelle Java process . . . . .	9
1.5	System registry via TOML . . . . .	10
1.6	YXML versus XML . . . . .	11
<b>2</b>	<b>Isabelle sessions and build management</b>	<b>13</b>
2.1	Session ROOT specifications . . . . .	13
2.2	System build options . . . . .	20
2.3	Invoking the build process . . . . .	23
2.4	Print messages from session build database . . . . .	28
2.5	Retrieve theory exports . . . . .	30
2.6	Dump PIDE session database . . . . .	31
2.7	Update theory sources based on PIDE markup . . . . .	32
2.8	Explore sessions structure . . . . .	34
2.9	Synchronize source repositories and session images for Isabelle and AFP . . . . .	35
2.10	Remote build management . . . . .	37
2.10.1	Build manager server . . . . .	38
2.10.2	Submitting build tasks . . . . .	39
2.11	Process theories within a session context . . . . .	40

<b>3</b>	<b>Presenting theories</b>	<b>43</b>
3.1	Generating HTML browser information . . . . .	43
3.2	Creating session root directories . . . . .	44
3.3	Preparing Isabelle session documents . . . . .	45
3.4	Full-text search for formal theory content . . . . .	47
<b>4</b>	<b>The Isabelle server</b>	<b>49</b>
4.1	Command-line tools . . . . .	49
4.1.1	Server . . . . .	49
4.1.2	Client . . . . .	50
4.1.3	Examples . . . . .	51
4.2	Protocol messages . . . . .	52
4.2.1	Byte messages . . . . .	52
4.2.2	Text messages . . . . .	53
4.2.3	Input and output messages . . . . .	53
4.2.4	Initial password exchange . . . . .	54
4.2.5	Synchronous commands . . . . .	54
4.2.6	Asynchronous commands . . . . .	55
4.3	Types for JSON values . . . . .	55
4.4	Server commands and results . . . . .	60
4.4.1	Command <code>help</code> . . . . .	60
4.4.2	Command <code>echo</code> . . . . .	61
4.4.3	Command <code>shutdown</code> . . . . .	61
4.4.4	Command <code>cancel</code> . . . . .	61
4.4.5	Command <code>session_build</code> . . . . .	62
4.4.6	Command <code>session_start</code> . . . . .	64
4.4.7	Command <code>session_stop</code> . . . . .	66
4.4.8	Command <code>use_theories</code> . . . . .	66
4.4.9	Command <code>purge_theories</code> . . . . .	69
<b>5</b>	<b>Isabelle/Scala systems programming</b>	<b>71</b>
5.1	Command-line tools . . . . .	72
5.1.1	Java Runtime Environment . . . . .	72
5.1.2	Scala toplevel . . . . .	72
5.1.3	Scala compiler . . . . .	73

5.2	Isabelle/Scala/Java modules . . . . .	73
5.2.1	Component configuration via <code>etc/build.props</code> . . . . .	73
5.2.2	Explicit Isabelle/Scala/Java build . . . . .	75
5.2.3	Project setup for common Scala IDEs . . . . .	76
5.3	Registered Isabelle/Scala functions . . . . .	77
5.3.1	Defining functions in Isabelle/Scala . . . . .	77
5.3.2	Invoking functions in Isabelle/ML . . . . .	77
5.4	Documenting Isabelle/Scala entities . . . . .	79
<b>6</b>	<b>Phabricator / Phorge server setup</b>	<b>82</b>
6.1	Quick start . . . . .	83
6.1.1	Initial setup . . . . .	83
6.1.2	Mailer configuration . . . . .	85
6.1.3	SSH configuration . . . . .	85
6.1.4	Internet domain name and HTTPS configuration . . . . .	86
6.2	Global data storage and backups . . . . .	87
6.3	Upgrading Phorge installations . . . . .	88
6.4	Reference of command-line tools . . . . .	89
6.4.1	<code>isabelle phabricator</code> . . . . .	89
6.4.2	<code>isabelle phabricator_setup</code> . . . . .	90
6.4.3	<code>isabelle phabricator_setup_mail</code> . . . . .	91
6.4.4	<code>isabelle phabricator_setup_ssh</code> . . . . .	92
<b>7</b>	<b>Miscellaneous tools</b>	<b>93</b>
7.1	Building Isabelle docker images . . . . .	93
7.2	Managing Isabelle components . . . . .	95
7.3	Viewing documentation . . . . .	96
7.4	Shell commands within the settings environment . . . . .	97
7.5	Inspecting the settings environment . . . . .	97
7.6	Mercurial repository setup . . . . .	98
7.7	Mercurial repository synchronization . . . . .	99
7.8	Installing standalone Isabelle executables . . . . .	100
7.9	Creating instances of the Isabelle logo . . . . .	101
7.10	Output the version identifier of the Isabelle distribution . . . . .	101
7.11	Managed installations of <i>Haskell</i> and <i>OCaml</i> . . . . .	102

<i>CONTENTS</i>	iv
<b>Bibliography</b>	<b>103</b>
<b>Index</b>	<b>104</b>

---

# The Isabelle system environment

---

This manual describes Isabelle together with related tools as seen from a system oriented view. See also the *Isabelle/Isar Reference Manual* [5] for the actual Isabelle input language and related concepts, and *The Isabelle/Isar Implementation Manual* [4] for the main concepts of the underlying implementation in Isabelle/ML.

## 1.1 Isabelle settings

Isabelle executables may depend on the *Isabelle settings* within the process environment. This is a statically scoped collection of environment variables, such as `ISABELLE_HOME`, `ML_SYSTEM`, `POLYML_HOME`. These variables are *not* intended to be set directly from the shell, but are provided by Isabelle *components* within their *settings files*, as explained below.

### 1.1.1 Bootstrapping the environment

Isabelle executables need to be run within a proper settings environment. This is bootstrapped as described below, on the first invocation of one of the outer wrapper scripts (such as `isabelle`). This happens only once for each process tree, i.e. the environment is passed to subprocesses according to regular Unix conventions.

1. The special variable `ISABELLE_HOME` is determined automatically from the location of the binary that has been run.

You should not try to set `ISABELLE_HOME` manually. Also note that the Isabelle executables either have to be run from their original location in the distribution directory, or via the executable objects created by the `isabelle install` tool. Symbolic links are admissible, but a plain copy of the `$ISABELLE_HOME/bin` files will not work!

2. The file `$ISABELLE_HOME/etc/settings` is run as a `bash` shell script with the `auto-export` option for variables enabled.

This file holds a rather long list of shell variable assignments, thus providing the site-wide default settings. The Isabelle distribution already contains a global settings file with sensible defaults for most variables.

3. The file `$ISABELLE_HOME_USER/etc/settings` (if it exists) is run in the same way as the site default settings. Note that the variable `ISABELLE_HOME_USER` has already been set before — usually to something like `$USER_HOME/.isabelle/Isabelle2025-2`.

Thus individual users may override the site-wide defaults. Typically, a user settings file contains only a few lines, with some assignments that are actually changed. Never copy the central `$ISABELLE_HOME/etc/settings` file!

Since settings files are regular GNU `bash` scripts, one may use complex shell commands, such as `if` or `case` statements to set variables depending on the system architecture or other environment variables. Such advanced features should be added only with great care, though. In particular, external environment references should be kept at a minimum.

A few variables are somewhat special, e.g. `ISABELLE_TOOL` is set automatically to the absolute path name of the `isabelle` executables.

Note that the settings environment may be inspected with the `isabelle getenv` tool. This might help to figure out the effect of complex settings scripts.

### 1.1.2 Common variables

This is a reference of common Isabelle settings variables. Note that the list is somewhat open-ended. Third-party utilities or interfaces may add their own selection. Variables that are special in some sense are marked with `*`.

`USER_HOME*` Is the cross-platform user home directory. On Unix systems this is usually the same as `HOME`, but on Windows it is the regular home directory of the user, not the one of within the Cygwin root file-system.<sup>1</sup>

---

<sup>1</sup>Cygwin itself offers another choice whether its `HOME` should point to the `/home` directory tree or the Windows user home.

`ISABELLE_HOME*` is the location of the top-level Isabelle distribution directory. This is automatically determined from the Isabelle executable that has been invoked. Do not attempt to set `ISABELLE_HOME` yourself from the shell!

`ISABELLE_HOME_USER` is the user-specific counterpart of `ISABELLE_HOME`. The default value is relative to `$USER_HOME/.isabelle`, under rare circumstances this may be changed in the global setting file. Typically, the `ISABELLE_HOME_USER` directory mimics `ISABELLE_HOME` to some extent. In particular, site-wide defaults may be overridden by a private `$ISABELLE_HOME_USER/etc/settings`.

`ISABELLE_PLATFORM_FAMILY*` is automatically set to the general platform family (`linux`, `macos`, `windows`). Note that platform-dependent tools usually need to refer to the more specific identification according to `ISABELLE_PLATFORM64`, `ISABELLE_WINDOWS_PLATFORM64`, `ISABELLE_APPLE_PLATFORM64`.

`ISABELLE_PLATFORM64*` indicates the standard Posix platform (`x86_64`, `arm64`), together with a symbolic name for the operating system (`linux`, `darwin`, `cygwin`).

`ISABELLE_WINDOWS_PLATFORM64*`, `ISABELLE_WINDOWS_PLATFORM32*` indicate the native Windows platform: both 64 bit and 32 bit executables are supported here.

In GNU bash scripts, a preference for native Windows platform variants may be specified like this (first 64 bit, second 32 bit):

```
"${ISABELLE_WINDOWS_PLATFORM64:-${ISABELLE_WINDOWS_PLATFORM32:-
  $ISABELLE_PLATFORM64}}"
```

`ISABELLE_APPLE_PLATFORM64*` indicates the native Apple Silicon platform (`arm64-darwin` if available), instead of Intel emulation via Rosetta (`ISABELLE_PLATFORM64=x86_64-darwin`).

`ISABELLE_TOOL*` is automatically set to the full path name of the `isabelle` executable.

`ISABELLE_IDENTIFIER*` refers to the name of this Isabelle distribution, e.g. `"Isabelle2025-2"`.



`ML_OPTIONS`, `ML_OPTIONS32`, `ML_OPTIONS64` provide command-line options to the underlying ML system of Isabelle. `ML_OPTIONS` is empty by default, but if a proper value is provided (e.g. via user settings) that takes precedence. Otherwise, `ML_OPTIONS32` or `ML_OPTIONS64` will be used, depending on the system option `ML_system_64`.

`ISABELLE_JDK_HOME` points to a full JDK (Java Development Kit) installation with `javac` and `jar` executables. Note that conventional `JAVA_HOME` points to the JRE (Java Runtime Environment), not the JDK.

`ISABELLE_JAVA_PLATFORM` identifies the hardware and operating system platform for the Java installation of Isabelle. That is always the (native) 64 bit variant: `x86_64-linux`, `x86_64-darwin`, `x86_64-windows`.

`ISABELLE_BROWSER_INFO` is the directory where HTML and PDF browser information is stored (see also §3.1); its default is `$ISABELLE_HOME_USER/browser_info`. For “system build mode” (see §2.3), `ISABELLE_BROWSER_INFO_SYSTEM` is used instead; its default is `$ISABELLE_HOME/browser_info`.

`ISABELLE_HEAPS` is the directory where session heap images, log files, and session build databases are stored; its default is `$ISABELLE_HOME_USER/heaps`. If `system_heaps` is `true`, `ISABELLE_HEAPS_SYSTEM` is used instead; its default is `$ISABELLE_HOME/heaps`. See also §2.3.

`ISABELLE_LOGIC` specifies the default logic to load if none is given explicitly by the user. The default value is `HOL`.

`ISABELLE_LINE_EDITOR` specifies the line editor for the `isabelle console` interface.

`ISABELLE_PDFLATEX`, `ISABELLE_LUALATEX`, `ISABELLE_BIBTEX`, `ISABELLE_MAKEINDEX` refer to  $\text{\LaTeX}$ -related tools for Isabelle document preparation (see also §3.3).

`ISABELLE_TOOLS` is a colon separated list of directories that are scanned by `isabelle` for external utility programs (see also §1.2).

`ISABELLE_DOCS` is a colon separated list of directories with documentation files.

`PDF_VIEWER` specifies the program to be used for displaying pdf files.

`ISABELLE_TMP_PREFIX*` is the prefix from which any running Isabelle ML process derives an individual directory for temporary files.

`ISABELLE_TOOL_JAVA_OPTIONS` is passed to the `java` executable when running Isabelle tools (e.g. `isabelle build`). This is occasionally helpful to provide more heap space, via additional options like `-Xms1g -Xmx4g`.

### 1.1.3 Additional components

Any directory may be registered as an explicit *Isabelle component*. The general layout conventions are that of the main Isabelle distribution itself, and the following two files (both optional) have a special meaning:

- `etc/settings` holds additional settings that are initialized when bootstrapping the overall Isabelle environment, cf. §1.1.1. As usual, the content is interpreted as a GNU bash script. It may refer to the component's enclosing directory via the `COMPONENT` shell variable.

For example, the following setting allows to refer to files within the component later on, without having to hardwire absolute paths:

```
MY_COMPONENT_HOME="$COMPONENT"
```

Components can also add to existing Isabelle settings such as `ISABELLE_TOOLS`, in order to provide component-specific tools that can be invoked by end-users. For example:

```
ISABELLE_TOOLS="$ISABELLE_TOOLS:$COMPONENT/lib/Tools"
```

- `etc/components` holds a list of further sub-components of the same structure. The directory specifications given here can be either absolute (with leading `/`) or relative to the component's main directory.

The root of component initialization is `ISABELLE_HOME` itself. After initializing all of its sub-components recursively, `ISABELLE_HOME_USER` is included in the same manner (if that directory exists). This allows to install private components via `$ISABELLE_HOME_USER/etc/components`, although it is often more convenient to do that programmatically via the `init_component` shell function in the `etc/settings` script of `$ISABELLE_HOME_USER` (or any other component directory). For example:

```
init_component "$HOME/screwdriver-2.0"
```

This is tolerant wrt. missing component directories, but might produce a warning.

More complex situations may be addressed by initializing components listed in a given catalog file, relatively to some base directory:

```
init_components "$HOME/my_component_store" "some_catalog_file"
```

The component directories listed in the catalog file are treated as relative to the given base directory.

See also §7.2 for some tool-support for resolving components that are formally initialized but not installed yet.

## 1.2 The Isabelle tool wrapper

The main *Isabelle tool wrapper* provides a generic startup environment for Isabelle-related utilities, user interfaces, add-on applications etc. Such tools automatically benefit from the settings mechanism (§1.1). Moreover, this is the standard way to invoke Isabelle/Scala functionality as a separate operating-system process. Isabelle command-line tools are run uniformly via a common wrapper — **isabelle**:

Usage: **isabelle** TOOL [ARGS ...]

Start Isabelle TOOL with ARGS; pass "-?" for tool-specific help.

Available tools:

...

Tools may be implemented in Isabelle/Scala or as stand-alone executables (usually as GNU bash scripts). In the invocation of “**isabelle tool**”, the named *tool* is resolved as follows (and in the given order).

1. An external tool found on the directories listed in the **ISABELLE\_TOOLS** settings variable (colon-separated list in standard POSIX notation). It is invoked as stand-alone program with the command-line arguments provided as **argv** array.
2. An internal tool that is declared via class **isabelle.Isabelle\_Scala\_Tools** and registered via **services** in **etc/build.props**. See §5.2 for more details.

There are also various administrative tools that are available from a bare repository clone of Isabelle, but not in regular distributions.

## Examples

Show the list of available documentation of the Isabelle distribution:

```
isabelle doc
```

View a certain document as follows:

```
isabelle doc system
```

Query the Isabelle settings environment:

```
isabelle getenv ISABELLE_HOME_USER
```

## 1.3 The raw ML process

The raw ML process has limited use in actual applications: it lacks the full session context that is required for export artifacts, Isabelle/ML/Scala integration and Prover IDE messages or markup. It is better to use `isabelle build` (§2.3) for regular sessions, or its front-end `isabelle process_theories` (§2.11) for adhoc sessions.

### 1.3.1 The raw ML process as command-line tool

The `isabelle ML_process` tool runs the raw ML process from the command-line:

Usage: `isabelle ML_process [OPTIONS]`

Options are:

<code>-C DIR</code>	change working directory
<code>-d DIR</code>	include session directory
<code>-e ML_EXPR</code>	evaluate ML expression on startup
<code>-f ML_FILE</code>	evaluate ML file on startup
<code>-l NAME</code>	logic session name (default <code>ISABELLE_LOGIC="HOL"</code> )
<code>-m MODE</code>	add print mode for output
<code>-o OPTION</code>	override Isabelle system <code>OPTION</code> (via <code>NAME=VAL</code> or <code>NAME</code> )
<code>-r</code>	redirect stderr to stdout

Run the raw ML process without Isabelle/Scala context.

Note that is often better to run the raw ML process directly from Isabelle/ML (via `Isabelle_System.ML_process`) or Isabelle/Scala (via `isabelle.ML_Process`): both avoid another bulky Java process.

Options `-e` and `-f` allow to evaluate ML code, before the ML process is started. The source is either given literally or taken from a file. Multiple `-e` and `-f` options are evaluated in the given order. Errors lead to a premature exit of the ML process with return code 1.

Option `-l` specifies the logic session name. Option `-d` specifies additional directories for session roots, see also §2.3.

The `-m` option adds identifiers of print modes to be made active for this session. For example, `-m ASCII` prefers ASCII replacement syntax over mathematical Isabelle symbols.

Option `-o` allows to override Isabelle system options for this process, see also §2.2.

Option `-C` specifies an explicit working directory. Option `-r` redirects `stderr` to `stdout`.

## Examples

The subsequent example retrieves the `Main` theory value from the theory loader within ML:

```
isabelle ML_process -e 'Thy_Info.get_theory "Main"'
```

Observe the delicate quoting rules for the GNU bash shell vs. ML. The Isabelle/ML and Scala libraries provide functions for that, but here we need to do it manually.

This is how to invoke a function body with proper return code and printing of errors, and without printing of a redundant `val it = (): unit` result:

```
isabelle ML_process -e 'Command_Line.tool (fn () => writeln "OK")'
```

```
isabelle ML_process -e 'Command_Line.tool (fn () => error "Bad")'
```

### 1.3.2 Interactive mode

The `isabelle console` tool runs the raw ML process with interactive console and line editor:

Usage: `isabelle console [OPTIONS]`

Options are:

<code>-d DIR</code>	include session directory
<code>-i NAME</code>	include session in name-space of theories
<code>-l NAME</code>	logic session name (default <code>ISABELLE_LOGIC</code> )
<code>-m MODE</code>	add print mode for output
<code>-n</code>	no build of session image on startup
<code>-o OPTION</code>	override Isabelle system OPTION (via <code>NAME=VAL</code> or <code>NAME</code> )
<code>-r</code>	bootstrap from raw Poly/ML

Build a logic session image and run the raw Isabelle ML process in interactive mode, with line editor `ISABELLE_LINE_EDITOR`.

Option `-l` specifies the logic session name. By default, its heap image is checked and built on demand, but the option `-n` skips that.

Option `-i` includes additional sessions into the name-space of theories: multiple occurrences are possible.

Option `-r` indicates a bootstrap from the raw Poly/ML system, which is relevant for Isabelle/Pure development.

Options `-d`, `-m`, `-o` have the same meaning as for `isabelle ML_process` (§1.3).

The Isabelle/ML process is run through the line editor that is specified via the settings variable `ISABELLE_LINE_EDITOR` (e.g. `rlwrap` for GNU readline); the fall-back is to use plain standard input/output.

The user is connected to the raw ML toplevel loop: this is neither Isabelle/Isar nor Isabelle/ML within the usual formal context. The most relevant ML commands at this stage are “`use "ROOT0.ML"`” and “`use "ROOT.ML"`” to load the ML sources of Isabelle/Pure interactively.

## 1.4 The raw Isabelle Java process

The `isabelle_java` executable allows to run a Java process within the name space of Java and Scala components that are bundled with Isabelle, but *without* the Isabelle settings environment (§1.1).

After such a JVM cold-start, the Isabelle environment can be accessed via `Isabelle_System.getenv` as usual, but the underlying process environment remains clean. This is e.g. relevant when invoking other processes that should remain separate from the current Isabelle installation.

Note that under normal circumstances, Isabelle command-line tools are run *within* the settings environment, as provided by the `isabelle` wrapper (§1.2 and §5.1.1).

### Example

The subsequent example creates a raw Java process on the command-line and invokes the main Isabelle application entry point:

```
isabelle_java -Djava.awt.headless=false isabelle.jedit.JEdit_Main
```

## 1.5 System registry via TOML

Tools implemented in Isabelle/Scala may refer to a global registry of hierarchically structured values, which is based on a collection of TOML files. TOML is conceptually similar to JSON, but aims at human-readable syntax. The recursive structure of a TOML *value* is defined as follows:

1. atom: string, integer, float, bool, date (ISO-8601)
2. array: sequence of *values*  $t$ , written  $[t_1, \dots, t_n]$
3. table: mapping from *names*  $a$  to *values*  $t$ , written  $\{a_1=t_1, \dots, a_n=t_n\}$

There are various alternative syntax forms for convenience, e.g. to construct a table of tables, using *header syntax* that resembles traditional .INI-file notation. For example:

```
[point.A]
x = 1
y = 1
description = "one point"

[point.B]
x = 2
y = -2
description = "another point"
```

```
[point.C]
x = 3
y = 7
description = "yet another point"
```

Or alternatively like this:

```
point.A.x = 1
point.A.y = 1
point.A.description = "one point"

point.B.x = 2
point.B.y = -2
point.B.description = "another point"

point.C.x = 3
point.C.y = 7
point.C.description = "yet another point"
```

The TOML website<sup>2</sup> provides many examples, together with the full language specification. Note that the Isabelle/Scala implementation of TOML uses the default ISO date/time format of Java.<sup>3</sup>

The overall system registry is collected from `registry.toml` files in directories specified via the settings variable `ISABELLE_REGISTRY`: this refers to `$ISABELLE_HOME` and `$ISABELLE_HOME_USER` by default, but further directories may be specified via the GNU bash function `isabelle_registry` within `etc/settings` of Isabelle components.

The result is available as Isabelle/Scala object `isabelle.Registry.global`. That is empty by default, unless users populate `$ISABELLE_HOME_USER/etc/registry.toml` or provide other component `etc/registry.toml` files.

## 1.6 YXML versus XML

Isabelle tools often use YXML, which is a simple and efficient syntax for untyped XML trees. The YXML format is defined as follows.

1. The encoding is always UTF-8.

---

<sup>2</sup><https://toml.io/en/v1.0.0>

<sup>3</sup><https://docs.oracle.com/en/java/javase/21/docs/api/java.base/java/time/format/DateTimeFormatter.html>



2. Body text is represented verbatim (no escaping, no special treatment of white space, no named entities, no CDATA chunks, no comments).
3. Markup elements are represented via ASCII control characters **X** = 5 and **Y** = 6 as follows:

XML	YXML
<code>&lt;name attribute=value ...&gt;</code>	<code><b>XY</b>name<b>Y</b>attribute=value...<b>X</b></code>
<code>&lt;/name&gt;</code>	<code><b>XYX</b></code>

There is no special case for empty body text, i.e. `<foo/>` is treated like `<foo></foo>`. Also note that **X** and **Y** may never occur in well-formed XML documents.

Parsing YXML is pretty straight-forward: split the text into chunks separated by **X**, then split each chunk into sub-chunks separated by **Y**. Markup chunks start with an empty sub-chunk, and a second empty sub-chunk indicates close of an element. Any other non-empty chunk consists of plain text. For example, see `~/src/Pure/PIDE/yxml.ML` or `~/src/Pure/PIDE/yxml.scala`.

YXML documents may be detected quickly by checking that the first two characters are **XY**.

---

# Isabelle sessions and build management

---

An Isabelle *session* consists of a collection of related theories that may be associated with formal documents (chapter 3). There is also a notion of *persistent heap* image to capture the state of a session, similar to object-code in compiled programming languages. Thus the concept of session resembles that of a “project” in common IDE environments, but the specific name emphasizes the connection to interactive theorem proving: the session wraps-up the results of user-interaction with the prover in a persistent form.

Application sessions are built on a given parent session, which may be built recursively on other parents. Following this path in the hierarchy eventually leads to some major object-logic session like *HOL*, which itself is based on *Pure* as the common root of all sessions.

Processing sessions may take considerable time. Isabelle build management helps to organize this efficiently. This includes support for parallel build jobs, in addition to the multithreaded theory and proof checking that is already provided by the prover process itself.

## 2.1 Session ROOT specifications


Session specifications reside in files called **ROOT** within certain directories, such as the home locations of registered Isabelle components or additional project directories given by the user.

The ROOT file format follows the lexical conventions of the *outer syntax* of Isabelle/Isar, see also [5]. This defines common forms like identifiers, names, quoted strings, verbatim text, nested comments etc. The grammar for *chapter\_def*, *chapter\_entry* and *session\_entry* is given as syntax diagram below. Each ROOT file may contain multiple specifications like this. Chapters help to organize browser info (§3.1), but have no formal meaning. The default chapter is “*Unsorted*”. Chapter definitions, which are optional,


allow to associate additional information.

Isabelle/jEdit [6] includes a simple editing mode `isabelle-root` for session ROOT files, which is enabled by default for any file of that name.


*chapter\_def*

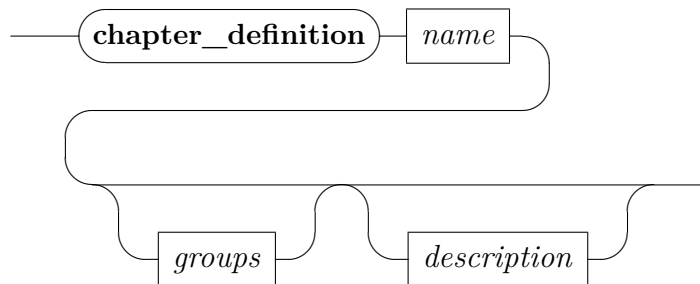


*chapter\_entry*




*session\_entry*

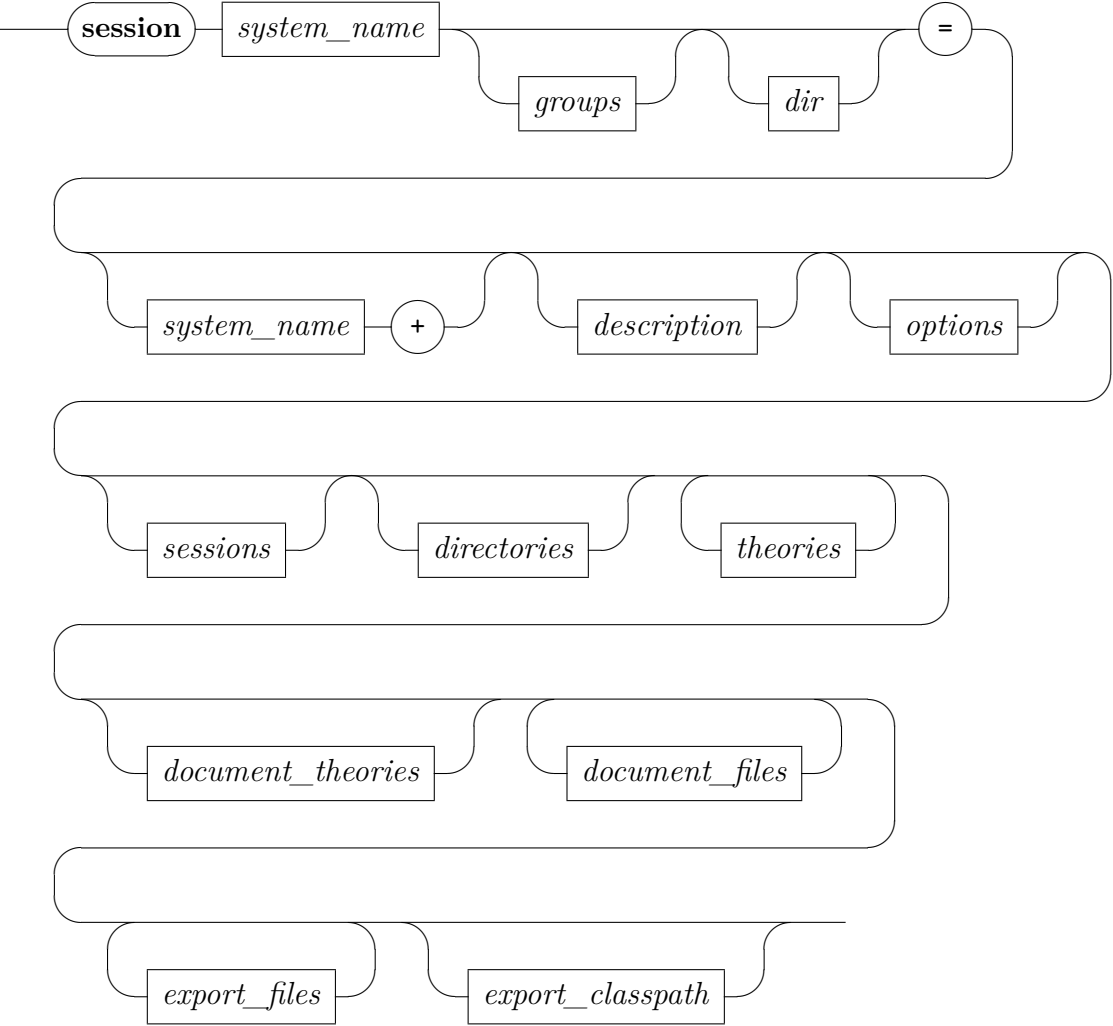


*groups*




*dir*




*description*




*options*




*opts*

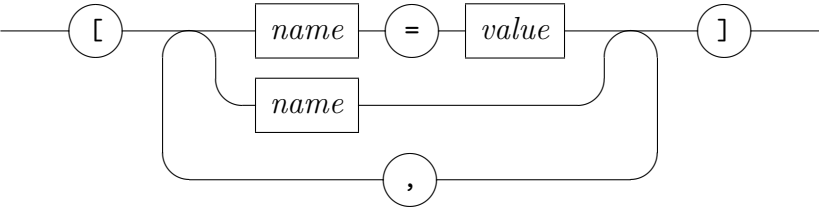


*value*




*sessions*




*directories*




*theories*




*theory\_entry*




*document\_theories*




*document\_files*

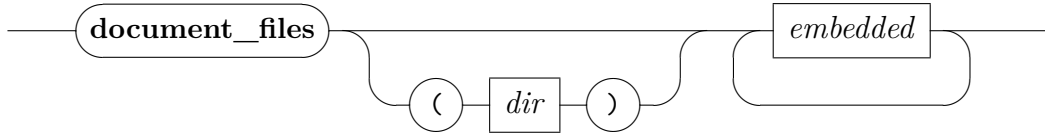

*export\_files*

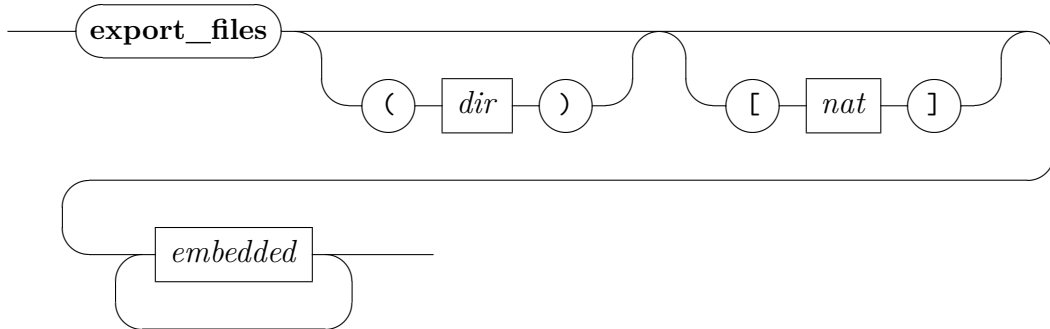

*export\_classpath*



**chapter\_definition**  $A$  (*groups*) associates a collection of groups with chapter  $A$ . All sessions that belong to this chapter will automatically become members of these groups.

**session**  $A = B + \text{body}$  defines a new session  $A$  based on parent session  $B$ , with its content given in *body* (imported sessions and theories). Note

that a parent (like *HOL*) is mandatory in practical applications: only Isabelle/Pure can bootstrap itself from nothing.

All such session specifications together describe a hierarchy (graph) of sessions, with globally unique names. The new session name *A* should be sufficiently long and descriptive to stand on its own in a potentially large library.

**session** *A* (*groups*) indicates a collection of groups where the new session is a member. Group names are uninterpreted and merely follow certain conventions. For example, the Isabelle distribution tags some important sessions by the group name called “*main*”. Other projects may invent their own conventions, but this requires some care to avoid clashes within this unchecked name space.

**session** *A* **in** *dir* specifies an explicit directory for this session; by default this is the current directory of the **ROOT** file.

All theory files are located relatively to the session directory. The prover process is run within the same as its current working directory.

**description** *text* is a free-form description for this session (or chapter), e.g. for presentation purposes.

**options** [*x* = *a*, *y* = *b*, *z*] defines separate options (§2.2) that are used when processing this session, but *without* propagation to child sessions. Note that *z* abbreviates *z* = *true* for Boolean options.

**sessions** *names* specifies sessions that are *imported* into the current name space of theories. This allows to refer to a theory *A* from session *B* by the qualified name *B.A* — although it is loaded again into the current ML process, which is in contrast to a theory that is already present in the *parent* session.

Theories that are imported from other sessions are excluded from the current session document.

**directories** *dirs* specifies additional directories for import of theory files via **theories** within **ROOT** or **imports** within a theory; *dirs* are relative to the main session directory (cf. **session** ... **in** *dir*). These directories need to be exclusively assigned to a unique session, without implicit sharing of file-system locations.

**theories** *options names* specifies a block of theories that are processed within an environment that is augmented by the given options, in addition to the global session options given before. Any number of blocks

of **theories** may be given. Options are only active for each **theories** block separately.

A theory name that is followed by (**global**) is treated literally in other session specifications or theory imports — the normal situation is to qualify theory names by the session name; this ensures globally unique names in big session graphs. Global theories are usually the entry points to major logic sessions: *Pure*, *Main*, *Complex\_Main*, *HOLCF*, *IFOL*, *FOL*, *ZF*, *ZFC* etc. Regular Isabelle applications should not claim any global theory names.

**document\_theories** *names* specifies theories from other sessions that should be included in the generated document source directory. These theories need to be explicit imports in the current session, or implicit imports from the underlying hierarchy of parent sessions. The generated **session.tex** file is not affected: the session's L<sup>A</sup>T<sub>E</sub>X setup needs to `\input{...}` generated **.tex** files separately.

**document\_files** (**in** *base\_dir*) *files* lists source files for document preparation, typically **.tex** and **.sty** for L<sup>A</sup>T<sub>E</sub>X. Only these explicitly given files are copied from the base directory to the document output directory, before formal document processing is started (see also §3.3). The local path structure of the *files* is preserved, which allows to reconstruct the original directory hierarchy of *base\_dir*. The default *base\_dir* is **document** within the session root directory.

**export\_files** (**in** *target\_dir*) [*number*] *patterns* specifies theory exports that may get written to the file-system, e.g. via **isabelle build** with option **-e** (§2.3). The *target\_dir* specification is relative to the session root directory; its default is **export**. Exports are selected via *patterns* as in **isabelle export** (§2.5). The number given in brackets (default: 0) specifies the prefix of elements that should be removed from each name: it allows to reduce the resulting directory hierarchy at the danger of overwriting files due to loss of uniqueness.

**export\_classpath** *patterns* specifies export artifacts that should be included into the local Java/Scala classpath of this session context. This is only relevant for tools that allow dynamic loading of service classes (§5.2), while most other Isabelle/Scala tools require global configuration during system startup. An empty list of *patterns* defaults to `"*:classpath/*.jar"`, which fits to the naming convention of JAR modules produced by the Isabelle/Isar command **scala\_build\_generated\_files** [5].



## Examples

See `~/src/HOL/ROOT` for a diversity of practically relevant situations, although it uses relatively complex quasi-hierarchic naming conventions like `HOL-SPARK`, `HOL-SPARK-Examples`. An alternative is to use unqualified names that are relatively long and descriptive, as in the Archive of Formal Proofs (AFP, <https://isa-afp.org>), for example.

## 2.2 System build options

See `~/etc/options` for the main defaults provided by the Isabelle distribution. Isabelle/jEdit [6] includes a simple editing mode `isabelle-options` for this file-format.

The following options are particularly relevant to build Isabelle sessions, in particular with document preparation (chapter 3).

- `browser_info` controls output of HTML browser info, see also §3.1.
- `document` controls document output for a particular session or theory; `document=pdf` or `document=true` means enabled, `document=""` or `document=false` means disabled (especially for particular theories).
- `document_output` specifies an alternative directory for generated output of the document preparation system; the default is within the `ISABELLE_BROWSER_INFO` hierarchy as explained in §3.1. See also `isabelle mkroot`, which generates a default configuration with output readily available to the author of the document.
- `document_echo` informs about document file names during session presentation.
- `document_variants` specifies document variants as a colon-separated list of `name=tags` entries. The default name is `document`, without additional tags.

Tags are specified as a comma separated list of modifier/name pairs and tell L<sup>A</sup>T<sub>E</sub>X how to interpret certain Isabelle command regions: “`+foo`” (or just “`foo`”) means to keep, “`-foo`” to drop, and “`/foo`” to fold text tagged as `foo`. The builtin default is equivalent to the tag specification “`+document,+theory,+proof,+ML,+visible,-invisible,+important,+unimportant`”; see also the L<sup>A</sup>T<sub>E</sub>X macros `\isakeeptag`, `\isadropstag`, and `\isafoldtag`, in `~/lib/texinputs/isabelle.sty`.

In contrast, `document_variants=document:outline=/proof,/ML` indicates two documents: the one called `document` with default tags, and the other called `outline` where proofs and ML sections are folded.

Document variant names are just a matter of conventions. It is also possible to use different document variant names (without tags) for different document root entries, see also §3.3.

- `document_tags` specifies alternative command tags as a comma-separated list of items: either “*command%tag*” for a specific command, or “*%tag*” as default for all other commands. This is occasionally useful to control the global visibility of commands via session options (e.g. in `ROOT`).
- `document_comment_latex` enables regular L<sup>A</sup>T<sub>E</sub>X `comment.sty`, instead of the historic version for plain T<sub>E</sub>X (default). The latter is much faster, but in conflict with L<sup>A</sup>T<sub>E</sub>X classes like Dagstuhl LIPICs<sup>1</sup>.
- `document_bibliography` explicitly enables the use of `bibtex`; the default is to check the presence of `root.bib`, but it could have a different name.
- `document_heading_prefix` specifies a prefix for the L<sup>A</sup>T<sub>E</sub>X macro names generated from Isar commands like `chapter`, `section` etc. The default is `isamarkup`, e.g. `section` becomes `\isamarkupsection`.
- `threads` determines the number of worker threads for parallel checking of theories and proofs. The default 0 means that a sensible value is guessed from the underlying hardware. This sometimes requires manual adjustment (on the command-line or within personal settings or preferences, not within a session `ROOT`).
- `condition` specifies a comma-separated list of process environment variables (or Isabelle settings) that are required for the subsequent theories to be processed. Conditions are considered “true” if the corresponding environment value is defined and non-empty.
- `timeout` and `timeout_scale` specify a real wall-clock timeout for the session as a whole: the two values are multiplied and taken as the number of seconds. Typically, `timeout` is given for individual sessions, and `timeout_scale` as global adjustment to overall hardware performance.

---

<sup>1</sup><https://github.com/dagstuhl-publishing/styles>

The timer is controlled outside the ML process by the JVM that runs Isabelle/Scala. Thus it is relatively reliable in canceling processes that get out of control, even if there is a deadlock without CPU time usage.

- **profiling** specifies a mode for global ML profiling. Possible values are the empty string (disabled), **time** for **profile\_time** and **allocations** for **profile\_allocations**. Results appear near the bottom of the session log file.
- **system\_log** specifies an optional log file for low-level messages produced by `Output.system_message` in Isabelle/ML; the standard value “-” refers to console progress of the build job.
- **system\_heaps** determines the directories for session heap images: **\$ISABELLE\_HEAPS** is the user directory and **\$ISABELLE\_HEAPS\_SYSTEM** the system directory (usually within the Isabelle application). For **system\_heaps=false**, heaps are stored in the user directory and may be loaded from both directories. For **system\_heaps=true**, store and load happens only in the system directory.

The `isabelle options` tool prints Isabelle system options. Its command-line usage is:

Usage: `isabelle options [OPTIONS] [MORE_OPTIONS ...]`

Options are:

<code>-b</code>	include <code>\$ISABELLE_BUILD_OPTIONS</code>
<code>-g OPTION</code>	get value of <code>OPTION</code>
<code>-l</code>	list options
<code>-t TAGS</code>	restrict list to given tags (comma-separated)
<code>-x FILE</code>	export options to <code>FILE</code> in YXML format

Report Isabelle system options, augmented by `MORE_OPTIONS` given as arguments `NAME=VAL` or `NAME`.

The command line arguments provide additional system options of the form *name=value* or *name* for Boolean options.

Option `-b` augments the implicit environment of system options by the ones of `ISABELLE_BUILD_OPTIONS`, cf. §2.3.

Option `-g` prints the value of the given option. Option `-l` lists all options with their declaration and current value. Option `-t` restricts the listing to given tags (as comma-separated list), e.g. `-t build,document`.

Option `-x` specifies a file to export the result in YXML format, instead of printing it in human-readable form.

## 2.3 Invoking the build process

The `isabelle build` tool invokes the build process for Isabelle sessions. It manages dependencies between sessions, related sources of theories and auxiliary files, and target heap images. Accordingly, it runs instances of the prover process with optional document preparation. Its command-line usage is:<sup>2</sup>

Usage: `isabelle build [OPTIONS] [SESSIONS ...]`

Options are:

- A ROOT include AFP with given root directory (":" for \$AFP\_BASE)
- B NAME include session NAME and all descendants
- D DIR include session directory and select its sessions
- H HOSTS additional cluster host specifications of the form  
NAMES:PARAMETERS (separated by commas)
- N cyclic shuffling of NUMA CPU nodes (performance tuning)
- P DIR enable HTML/PDF presentation in directory (":" for  
default)
- R refer to requirements of selected sessions
- S soft build: only observe changes of sources, not heap  
images
- X NAME exclude sessions from group NAME and all descendants
- a select all sessions
- b build heap images
- c clean build
- d DIR include session directory
- e export files from session specification into file-system
- f fresh build
- g NAME select session group NAME
- j INT maximum number of parallel jobs  
(default: 1 for local build, 0 for build cluster)
- l list session source files
- n no build -- take existing session build databases
- o OPTION override Isabelle system OPTION (via NAME=VAL or NAME)
- v verbose
- x NAME exclude session NAME and all descendants

Build and manage Isabelle sessions: ML heaps, session databases, documents.

Parameters for cluster host specifications (-H), apart from system options:

...

Notable system options: see "`isabelle options -l -t build`"

---

<sup>2</sup>Isabelle/Scala provides the same functionality via `isabelle.Build.build`.

```

Notable system settings:
  ISABELLE_TOOL_JAVA_OPTIONS="..."
  ISABELLE_BUILD_OPTIONS="..."

  ML_PLATFORM="..."
  ML_HOME="..."
  ML_SYSTEM="..."
  ML_OPTIONS="..."

```

Isabelle sessions are defined via session ROOT files as described in (§2.1). The totality of sessions is determined by collecting such specifications from all Isabelle component directories (§1.1.3), augmented by more directories given via options `-d DIR` on the command line. Each such directory may contain a session ROOT file with several session specifications.

Any session root directory may refer recursively to further directories of the same kind, by listing them in a catalog file `ROOTS` line-by-line. This helps to organize large collections of session specifications, or to make `-d` command line options persistent (e.g. in `$ISABELLE_HOME_USER/ROOTS`).

The subset of sessions to be managed is determined via individual *SESSIONS* given as command-line arguments, or session groups that are given via one or more options `-g NAME`. Option `-a` selects all sessions. The build tool takes session dependencies into account: the set of selected sessions is completed by including all ancestors.

One or more options `-B NAME` specify base sessions to be included (all descendants wrt. the session parent or import graph).

One or more options `-x NAME` specify sessions to be excluded (all descendants wrt. the session parent or import graph). Option `-X` is analogous to this, but excluded sessions are specified by session group membership.

Option `-R` reverses the selection in the sense that it refers to its requirements: all ancestor sessions excluding the original selection. This allows to prepare the stage for some build process with different options, before running the main build itself (without option `-R`).

Option `-D` is similar to `-d`, but selects all sessions that are defined in the given directories.

Option `-S` indicates a “soft build”: the selection is restricted to those sessions that have changed sources (according to actually imported theories). The status of heap images is ignored.

The build process depends on additional options (§2.2) that are passed to the prover eventually. The settings variable `ISABELLE_BUILD_OPTIONS` allows to

provide additional defaults, e.g. `ISABELLE_BUILD_OPTIONS="document=pdf threads=4"`. Moreover, the environment of system build options may be augmented on the command line via `-o name=value` or `-o name`, which abbreviates `-o name=true` for Boolean or string options. Multiple occurrences of `-o` on the command-line are applied in the given order.

Option `-P` enables PDF/HTML presentation in the given directory, where “`-P:`” refers to the default `ISABELLE_BROWSER_INFO` (or `ISABELLE_BROWSER_INFO_SYSTEM`). This applies only to explicitly selected sessions; note that option `-R` allows to select all requirements separately.

Option `-b` ensures that heap images are produced for all selected sessions. By default, images are only saved for inner nodes of the hierarchy of sessions, as required for other sessions to continue later on.

Option `-c` cleans the selected sessions (all descendants wrt. the session parent or import graph) before performing the specified build operation.

Option `-e` executes the **export\_files** directives from the ROOT specification of all explicitly selected sessions: the status of the session build database needs to be OK, but the session could have been built earlier. Using **export\_files**, a session may serve as abstract interface for add-on build artefacts, but these are only materialized on explicit request: without option `-e` there is no effect on the physical file-system yet.

Option `-f` forces a fresh build of all selected sessions and their requirements.

Option `-n` omits the actual build process after the preparatory stage (including optional cleanup). The overall return code always the status of the set of selected sessions. Add-on builds (like presentation) are run for successful sessions, i.e. already finished ones.

Option `-j` specifies the maximum number of parallel build jobs (prover processes). Each prover process is subject to a separate limit of parallel worker threads, cf. system option `threads`. The default is 1 for a local build, and 0 for a cluster build (see option `-H` below).

Option `-N` enables cyclic shuffling of NUMA CPU nodes. This may help performance tuning on Linux servers with separate CPU/memory modules.

Option `-v` increases the general level of verbosity.

Option `-l` lists the source files that contribute to a session.

Option `-H` augments the cluster hosts to be used in this build process. Each `-H` option accepts multiple host or cluster names (separated by commas), which all share the same (optional) parameters or system options.

Multiple `-H` options may be given to specify further hosts (with different parameters). For example: `-H host1,host2:jobs=2,threads=4 -H host3:jobs=4,threads=6`.

The syntax for host parameters follows Isabelle outer syntax, notably with double-quoted string literals. On the command-line, this may require extra single quotes or escapes. For example: `-H 'host4:dirs="..."'`.

The system registry (§1.5) may define host and cluster names in its tables `host` and `cluster`, respectively. A name in option `-H` without prefix refers to the registry table `host`: each entry consists of an optional `hostname` and further options. A name with the prefix “`cluster.`” refers to the table `cluster`: each entry provides `hosts`, an array of names for entries of the table `host` as above, and additional options that apply to all hosts simultaneously.

The local host only participates in cluster build, if an explicit option `-j > 0` is given. The default is 0, which means that `isabelle build -H` will initialize the build queue and oversee remote workers, but not run any Isabelle sessions on its own account.

The presence of at least one `-H` option changes the mode of operation of `isabelle build` substantially. It uses a shared PostgreSQL database server, which needs to be accessible from each node via local system options such as `build_database_server`, `build_database_host`, or `build_database_ssh_host`. Remote host connections are managed via regular SSH configuration, see also `$HOME/.ssh/config` on each node.

## Examples

Build a specific logic image:

```
isabelle build -b HOLCF
```

Build the main group of logic images:

```
isabelle build -b -g main
```

Build all descendants (and requirements) of FOL and ZF:

```
isabelle build -B FOL -B ZF
```

Build all sessions where sources have changed (ignoring heaps):

```
isabelle build -a -S
```

Provide a general overview of the status of all Isabelle sessions, without building anything:

```
isabelle build -a -n -v
```

Build all sessions with HTML browser info and PDF document preparation:

```
isabelle build -a -o browser_info -o document
```

Build all sessions with a maximum of 8 parallel prover processes and 4 worker threads each (on a machine with many cores):

```
isabelle build -a -j8 -o threads=4
```

Build some session images with cleanup of their descendants, while retaining their ancestry:

```
isabelle build -b -c HOL-Library HOL-Algebra
```

HTML/PDF presentation for sessions that happen to be properly built already, without rebuilding anything except the missing browser info:

```
isabelle build -a -n -o browser_info
```

Clean all sessions without building anything:

```
isabelle build -a -n -c
```

Build all sessions from some other directory hierarchy, according to the settings variable **AFP** that happens to be defined inside the Isabelle environment:

```
isabelle build -D '$AFP'
```

Inform about the status of all sessions required for AFP, without building anything yet:

```
isabelle build -D '$AFP' -R -v -n
```

Run a distributed build on 3 cluster hosts (local, **host1**, **host2**):

```
isabelle build -a -j2 -o threads=8 \
-H host1:jobs=2,threads=8
-H host2:jobs=4:threads=4,numa,shared
```



Use build hosts and cluster specifications:

```
isabelle build -H a -H b -H cluster.xy
```

The above requires a `$ISABELLE_HOME_USER/etc/registry.toml` file like this:

```
host.a = { hostname = "host-a.acme.org", jobs = 2 }
host.b = { hostname = "host-b.acme.org", jobs = 2 }

host.x = { hostname = "server1.example.com" }
host.y = { hostname = "server2.example.com" }
cluster.xy = { hosts = ["x", "y"], jobs = 4 }
```

## 2.4 Print messages from session build database

The `isabelle build_log` tool prints prover messages from the build database of the given session. Its command-line usage is:

```
Usage: isabelle build_log [OPTIONS] [SESSIONS ...]
```

Options are:

```
-H REGEX    filter messages by matching against head
-M REGEX    filter messages by matching against body
-T NAME     restrict to given theories (multiple options possible)
-U          output Unicode symbols
-m MARGIN   margin for pretty printing (default: 76.0)
-o OPTION   override Isabelle system OPTION (via NAME=VAL or NAME)
-v          print all messages, including information etc.
```

Print messages from the session build database of the given sessions, without any checks against current sources nor session structure:  
results

from old sessions or failed builds can be printed as well.

Multiple options `-H` and `-M` are conjunctive: all given patterns need to match. Patterns match any substring, but `^` or `$` may be used to match the start or end explicitly.

The specified session databases are taken as is, with formal checking against current sources: There is *no* implicit build process involved, so it is possible

to retrieve error messages from a failed session as well. The order of messages follows the source positions of source files; thus the result is mostly deterministic, independent of the somewhat erratic evaluation of parallel processing.

Option `-o` allows to change system options, as in `isabelle build` (§2.3). This may affect the storage space for the build database, notably via `system_heaps`, or `build_database_server` and its relatives.

Option `-T` restricts output to given theories: multiple entries are possible by repeating this option on the command-line. The default is to refer to *all* theories used in the original session build process.

Options `-m` and `-U` modify pretty printing and output of Isabelle symbols. The default is for an old-fashioned ASCII terminal at 80 characters per line (76 + 4 characters to prefix warnings or errors).

Option `-v` prints all messages from the session database that are normally inlined into the source text, including information messages etc.

Options `-H` and `-M` filter messages according to their header or body content, respectively. The header follows a very basic format that makes it easy to match message kinds (e.g. `Warning` or `Error`) and file names (e.g. `src/HOL/Nat.thy`). The body is usually pretty-printed, but for matching it is treated like one long line: blocks are ignored and breaks are turned into plain spaces (according to their formal width).

The syntax for patterns follows regular expressions of the Java platform.<sup>3</sup>

## Examples

Print messages from theory `HOL.Nat` of session `HOL`, using Unicode rendering of Isabelle symbols and a margin of 100 characters:

```
isabelle build_log -T HOL.Nat -U -m 100 HOL
```

Print warnings about ambiguous input (inner syntax) of session `HOL-Library`, which is built beforehand:

```
isabelle build HOL-Library
isabelle build_log -H "Warning" -M "Ambiguous input" HOL-Library
```

Print all errors from all sessions, e.g. from a partial build of Isabelle/AFP:

```
isabelle build_log -H "Error" $(isabelle sessions -a -d AFP/thys)
```

---

<sup>3</sup><https://docs.oracle.com/en/java/javase/21/docs/api/java.base/java/util/regex/Pattern.html>

## 2.5 Retrieve theory exports

The `isabelle export` tool retrieves theory exports from the session database. Its command-line usage is:

Usage: `isabelle export [OPTIONS] SESSION`

Options are:

```
-O DIR      output directory for exported files (default: "export")
-d DIR      include session directory
-l          list exports
-n          no build of session
-o OPTION   override Isabelle system OPTION (via NAME=VAL or NAME)
-p NUM      prune path of exported files by NUM elements
-x PATTERN  extract files matching pattern (e.g. "*:**" for all)
```

List or export theory exports for `SESSION`: named blobs produced by `isabelle build`. Option `-l` or `-x` is required; option `-x` may be repeated.

The `PATTERN` language resembles glob patterns in the shell, with `?` and `*` (both excluding `:"` and `/"`), `**` (excluding `:"`), and `[abc]` or `[^abc]`, and variants `{pattern1,pattern2,pattern3}`.

The specified session is updated via `isabelle build` (§2.3), with the same options `-d`, `-o`. The option `-n` suppresses the implicit build process: it means that a potentially outdated session database is used!

Option `-l` lists all stored exports, with compound names *theory:name*.

Option `-x` extracts stored exports whose compound name matches the given pattern. Note that wild cards “?” and “\*” do not match the separators “:” and “/”; the wild card `**` matches over directory name hierarchies separated by “/”. Thus the pattern `*:**` matches *all* theory exports. Multiple options `-x` refer to the union of all specified patterns.

Option `-O` specifies an alternative output directory for option `-x`: the default is `export` within the current directory. Each theory creates its own sub-directory hierarchy, using the session-qualified theory name.

Option `-p` specifies the number of elements that should be pruned from each name: it allows to reduce the resulting directory hierarchy at the danger of overwriting files due to loss of uniqueness.

## 2.6 Dump PIDE session database

The `isabelle dump` tool dumps information from the cumulative PIDE session database (which is processed on the spot). Its command-line usage is:

Usage: `isabelle dump [OPTIONS] [SESSIONS ...]`

Options are:

<code>-A NAMES</code>	dump named aspects (default: ...)
<code>-B NAME</code>	include session NAME and all descendants
<code>-D DIR</code>	include session directory and select its sessions
<code>-O DIR</code>	output directory for dumped files (default: "dump")
<code>-R</code>	refer to requirements of selected sessions
<code>-X NAME</code>	exclude sessions from group NAME and all descendants
<code>-a</code>	select all sessions
<code>-b NAME</code>	base logic image (default "Pure")
<code>-d DIR</code>	include session directory
<code>-g NAME</code>	select session group NAME
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-v</code>	verbose
<code>-x NAME</code>	exclude session NAME and all descendants

Dump cumulative PIDE session database, with the following aspects:

...

Options `-B`, `-D`, `-R`, `-X`, `-a`, `-d`, `-g`, `-x` and the remaining command-line arguments specify sessions as in `isabelle build` (§2.3): the cumulative PIDE database of all their loaded theories is dumped to the output directory of option `-O` (default: `dump` in the current directory).

Option `-b` specifies an optional base logic image, for improved scalability of the PIDE session. Its theories are only processed if it is included in the overall session selection.

Option `-o` overrides Isabelle system options as for `isabelle build` (§2.3).

Option `-v` increases the general level of verbosity.

Option `-A` specifies named aspects of the dump, as a comma-separated list. The default is to dump all known aspects, as given in the command-line usage of the tool. The underlying Isabelle/Scala operation `isabelle.Dump.dump` takes aspects as user-defined operations on the final PIDE state and document version. This allows to imitate Prover IDE rendering under program control.

## Examples

Dump all Isabelle/ZF sessions (which are rather small):

```
isabelle dump -v -B ZF
```

Dump the quite substantial HOL-Analysis session, with full bootstrap from Isabelle/Pure:

```
isabelle dump -v HOL-Analysis
```

Dump all sessions connected to HOL-Analysis, using main Isabelle/HOL as basis:

```
isabelle dump -v -b HOL -B HOL-Analysis
```

This results in uniform PIDE markup for everything, except for the Isabelle/Pure bootstrap process itself. Producing that on the spot requires several GB of heap space, both for the Isabelle/Scala and Isabelle/ML process (in 64bit mode). Here are some relevant settings (§1.1.1) for such ambitious applications:

```
ISABELLE_TOOL_JAVA_OPTIONS="-Xms4g -Xmx32g -Xss16m"
ML_OPTIONS="--minheap 4G --maxheap 32G"
```

## 2.7 Update theory sources based on PIDE markup

The `isabelle update` tool updates theory sources based on markup that is produced by the regular `isabelle build` process (§2.3). Its command-line usage is:

Usage: `isabelle update [OPTIONS] [SESSIONS ...]`

Options are:

<code>-B NAME</code>	include session NAME and all descendants
<code>-D DIR</code>	include session directory and select its sessions
<code>-R</code>	refer to requirements of selected sessions
<code>-X NAME</code>	exclude sessions from group NAME and all descendants
<code>-a</code>	select all sessions
<code>-b</code>	build heap images
<code>-c</code>	clean build

<code>-d DIR</code>	include session directory
<code>-f</code>	fresh build
<code>-g NAME</code>	select session group NAME
<code>-j INT</code>	maximum number of parallel jobs (default 1)
<code>-l NAME</code>	additional base logic
<code>-n</code>	no build -- take existing session build databases
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-u OPT</code>	override "update" option for selected sessions
<code>-v</code>	verbose
<code>-x NAME</code>	exclude session NAME and all descendants

Update theory sources based on PIDE markup produced by "isabelle build".

Most options are the same as for `isabelle build` (§2.3).

Option `-l` specifies one or more base logics: these sessions and their ancestors are *excluded* from the update.

Option `-u` refers to specific `update` options, by relying on naming convention: "`-u OPT`" is a shortcut for "`-o update_OPT`".

The following `update` options are supported:

- `update_inner_syntax_cartouches` to update inner syntax (types, terms, etc.) to use cartouches, instead of double-quoted strings or atomic identifiers. For example, "`lemma "x = x"`" is replaced by "`lemma <x = x>`", and "`assume A`" is replaced by "`assume <A>`".
- `update_mixfix_cartouches` to update mixfix templates to use cartouches instead of double-quoted strings. For example, "`(infixl "+" 65)`" is replaced by "`(infixl <+> 65)`".
- `update_control_cartouches` to update antiquotations to use the compact form with control symbol and cartouche argument. For example, "`@{term "x + y"}`" is replaced by "`term <x + y>`" (the control symbol is literally `\<^term>`.)
- `update_path_cartouches` to update file-system paths to use cartouches: this depends on language markup provided by semantic processing of parsed input.
- `update_cite` to update `LATEX \cite` commands and old-style `@{cite "name"}` document antiquotations.

It is also possible to produce custom updates in Isabelle/ML, by reporting `Markup.update` with the precise source position and a replacement text. This operation should be made conditional on specific system options, similar to the ones above. Searching the above option names in ML sources of `$ISABELLE_HOME/src/Pure` provides some examples.

Updates can be in conflict by producing nested or overlapping edits: this may require to run `isabelle update` multiple times.

### Examples

Update some cartouche notation in all theory sources required for session `HOL-Analysis` (and ancestors):

```
isabelle update -u mixfix_cartouches HOL-Analysis
```

Update the same for all application sessions based on `HOL-Analysis`, but do not change the underlying `HOL` (and `Pure`) session:

```
isabelle update -u mixfix_cartouches -l HOL -B HOL-Analysis
```

Update all sessions that happen to be properly built beforehand:

```
isabelle update -u mixfix_cartouches -n -a
```

## 2.8 Explore sessions structure

The `isabelle sessions` tool explores the sessions structure. Its command-line usage is:

```
Usage: isabelle sessions [OPTIONS] [SESSIONS ...]
```

Options are:

<code>-B NAME</code>	include session <code>NAME</code> and all descendants
<code>-D DIR</code>	include session directory and select its sessions
<code>-R</code>	refer to requirements of selected sessions
<code>-X NAME</code>	exclude sessions from group <code>NAME</code> and all descendants
<code>-a</code>	select all sessions
<code>-b</code>	follow session build dependencies (default: source imports)
<code>-d DIR</code>	include session directory
<code>-g NAME</code>	select session group <code>NAME</code>

`-x NAME`      exclude session NAME and all descendants

Explore the structure of Isabelle sessions and print result names in topological order (on stdout).

Arguments and options for session selection resemble `isabelle build` (§2.3).

## Examples

All sessions of the Isabelle distribution:

```
isabelle sessions -a
```

Sessions that are imported by ZF:

```
isabelle sessions ZF
```

Sessions that are required to build ZF:

```
isabelle sessions -b ZF
```

Sessions that are based on ZF (and imported by it):

```
isabelle sessions -B ZF
```

All sessions of Isabelle/AFP (based in directory AFP):

```
isabelle sessions -D AFP/thys
```

Sessions required by Isabelle/AFP (based in directory AFP):

```
isabelle sessions -R -D AFP/thys
```

## 2.9 Synchronize source repositories and session images for Isabelle and AFP

The `isabelle sync` tool synchronizes a local Isabelle and AFP source repository, possibly with prebuilt `.jar` files and session images. Its command-line usage is:



Usage: `isabelle sync [OPTIONS] TARGET`

Options are:

<code>-A ROOT</code>	include AFP with given root directory (":" for <code>\$AFP_BASE</code> )
<code>-H</code>	purge heaps directory on target
<code>-I NAME</code>	include session heap image and build database (based on accidental local state)
<code>-J</code>	preserve *.jar files
<code>-T</code>	thorough treatment of file content and directory times
<code>-a REV</code>	explicit AFP revision (default: state of working directory)
<code>-s HOST</code>	SSH host name for remote target (default: local)
<code>-u USER</code>	explicit SSH user name
<code>-n</code>	no changes: dry-run
<code>-p PORT</code>	explicit SSH port
<code>-r REV</code>	explicit revision (default: state of working directory)
<code>-v</code>	verbose

Synchronize Isabelle + AFP repositories, based on "isabelle hg\_sync".

The approach is to apply `isabelle hg_sync` (see §7.7) on the underlying Isabelle repository, and an optional AFP repository. Consequently, the Isabelle installation needs to be a Mercurial repository clone: a regular download of the Isabelle distribution is not sufficient!

On the target side, AFP is placed into `ISABELLE_HOME` as immediate sub-directory with the literal name `AFP`; thus it can be easily included elsewhere, e.g. `isabelle build -d '~~/AFP'` on the remote side.

Options `-T`, `-n`, `-p`, `-s`, `-u`, `-v` are the same as the underlying `isabelle hg_sync`.

Options `-r` and `-a` are the same as option `-r` for `isabelle hg_sync`, but for the Isabelle and AFP repositories, respectively. The AFP version is only used if a corresponding repository is given via option `-A`, either with explicit root directory, or as `-A:` to refer to `$AFP_BASE` (this assumes AFP as component of the local Isabelle installation). If no AFP repository is given, an existing AFP directory on the target remains unchanged.

Option `-J` uploads existing `.jar` files from the working directory, which are usually Isabelle/Scala/Java modules under control of `isabelle scala_build` via `etc/build.props` (see also §5.2). Thus the dependency management is accurate: bad uploads will be rebuilt eventually (or ignored). This might fail for very old Isabelle versions, when going into the past via option `-r`: here it is better to omit option `-J` and thus purge `.jar` files on the target (because they do not belong to the repository).

Option `-I` uploads a collection of session images. The set of `-I` options speci-

fies the end-points in the session build graph, including all required ancestors. The result collection is uploaded using the underlying **rsync** policies, so unchanged images are not sent again. Session images are assembled within the target **heaps** directory: this scheme fits together with **isabelle build -o system\_heaps**. Images are taken as-is from the local Isabelle installation, regardless of option **-r**. Upload of bad images could waste time and space, but running e.g. **isabelle build** on the target will check dependencies accurately and rebuild outdated images on demand.

Option **-H** tells the underlying **rsync** process to purge the **heaps** directory on the target, before uploading new images via option **-I**. The default is to work monotonically: old material that is not overwritten remains unchanged. Over time, this may lead to unused garbage, due to changes in session names or the Poly/ML version. Option **-H** helps to avoid wasting file-system space.

### Examples

For quick testing of Isabelle + AFP on a remote machine, upload changed sources, jars, and local sessions images for HOL:

```
isabelle sync -A: -I HOL -J -s testmachine test/isabelle_afp
```

Assuming that the local HOL hierarchy has been up-to-date, and the local and remote ML platforms coincide, a remote **isabelle build** will proceed without building HOL again.

Here is a variation for extra-clean testing of Isabelle + AFP: no option **-J**, but option **-T** to disable the default “quick check” of **rsync** (which only inspects file sizes and date stamps); existing heaps are deleted:

```
isabelle sync -A: -T -H -s testmachine test/isabelle_afp
```

## 2.10 Remote build management

Building large collections of Isabelle session (e.g., the AFP) is an expensive operation that might not be feasible on a local device, so powerful remote hardware is necessary to be able to test changes quickly. In a multi-user environment, these hardware resources must be managed such that important tasks can be completed as soon as possible, and automated tasks run in the background when necessary.

### 2.10.1 Build manager server

The `isabelle build_manager` tool starts a server process that manages a queue of tasks, runs build jobs, and serves a web view that displays the results. It consists of several threads:

- *poller*: listens to repository updates and queues automatic tasks.
- *timer*: queues periodic tasks at specific points in time.
- *runner*: starts jobs for feasible tasks with the highest priority whenever possible. Jobs run exclusively on their resources, either on the cluster specified via `build_manager_cluster` (the connection to the `build_master` host must be specified via `build_manager_cluster_ssh` connection options), or on a single remote host (under the identifier given by `build_manager_identifier`).
- *web\_server*: serves the web page. If the web address is not reachable under the SSH hostname of the server, it must be set via `build_manager_address`.

Automated tasks must be registered in a `isabelle.Isabelle_CI_Jobs` service. The system option `build_manager_ci_jobs` controls which jobs are executed by the `Build_Manager`.

The command-line usage to start the server is:

Usage: `isabelle build_manager [OPTIONS]`

Options are:

- A ROOT        include AFP with given root directory (":" for \$AFP\_BASE)
- D DIR         include extra component in given directory
- H HOSTS       host specifications for all available hosts of the form  
                 NAMES:PARAMETERS (separated by commas)
- o OPTION      override Isabelle system OPTION (via NAME=VAL or NAME)
- p PORT        explicit web server port

Run Isabelle build manager.

Option `-o` has the same meaning as for `isabelle build`.

Option `-p` has the same meaning as for `isabelle server`.

Option `-A` refers to the AFP (must be a Mercurial clone).

Option `-D` extra Isabelle components in a Mercurial repository clone to be considered by the poller and CI jobs.

Option `-H` must list all host specifications to be used in the build cluster or as remote host.

In case a job does not complete on its own, it is terminated after a timeout defined by the CI job, or `build_manager_timeout` for user-submitted tasks.

To gracefully stop the build manager, it should be sent an interrupt signal (`kill -INT`). This will stop all threads gracefully: Any running build is allowed to complete before the Isabelle/Scala process terminates.

The build manager stores its persistent data (including user-submitted tasks and build logs) in the directory given by `build_manager_dir`. It must be writable by the common Unix group specified in `build_manager_group`. It also needs a PostgreSQL database (via `build_manager_database` connection options) for shared state. A clean database state (e.g., after a schema update) can be restored from build logs via the `isabelle build_manager_database` tool:

Usage: `isabelle build_manager_database [OPTIONS]`

Options are:

<code>-A ROOT</code>	include AFP with given root directory (":" for <code>\$AFP_BASE</code> )
<code>-o OPTION</code>	override Isabelle system OPTION (via <code>NAME=VAL</code> or <code>NAME</code> )
<code>-u</code>	update reports

Restore `build_manager` database from log files.

Options `-A` and `-o` are the same as in `isabelle build_manager`.

Option `-u` updates Mercurial reports in the persistent storage based on the version history (e.g., to change the diff display in the web server).

## 2.10.2 Submitting build tasks

The `isabelle build_task` tool submits user-defined build tasks by syncing the local Isabelle repository to the server and queuing a task in the shared state. Command-line options are almost identical to the regular `isabelle build`, with the exception of preferences in the remote build.

For the SSH connection, the server needs to be accessible with the system options `build_manager_ssh_user`, `build_manager_ssh_host`, etc.

The database needs to be configured similarly (via `build_manager_database` connection options) though the PostgreSQL server can also be configured to trust connections of logged in users via “peer authentication”.

## Examples

Clean build of the distribution:

```
isabelle build_task -c -a
```

Build all sessions in the AFP excluding the `very_slow` group:

```
isabelle build_task -A: -X slow -g AFP
```

## 2.11 Process theories within a session context

The `isabelle process_theories` tool takes source files and theories from existing sessions to compose an adhoc session (in a temporary directory) that is then processed via regular `isabelle build`. It is also possible to output prover messages roughly like `isabelle build_log`, while the theories are being processed.

Usage: `isabelle process_theories [OPTIONS] [THEORIES...]`

Options are:

<code>-D DIR</code>	explicit session directory (default: private)
<code>-E EXPORTS</code>	write session export artifacts to file-system
<code>-F FILE</code>	include additional session files, listed in FILE
<code>-H REGEX</code>	filter messages by matching against head
<code>-M REGEX</code>	filter messages by matching against body
<code>-O</code>	output messages
<code>-U</code>	output Unicode symbols
<code>-d DIR</code>	include session directory
<code>-f FILE</code>	include additional session file
<code>-l NAME</code>	logic session name (default ISABELLE_LOGIC="HOL")
<code>-m MARGIN</code>	margin for pretty printing (default: 76.0)
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-v</code>	verbose

Process theories within an adhoc session context.

Explicit *theories* given as command-line arguments, not options, refer to qualified theory names from existing sessions, e.g. `HOL-Library.Multiset` or `HOL-Examples.Seq`. The session qualifiers are used to augment the adhoc session specification by suitable entries for **sessions** (§2.1).

Options `-f` and `-F` specify source files for the adhoc session directory (multiple occurrences are possible): `-f` is for literal file names, and `-F` is for files that contain a list of further files (one per line).

Option `-D` indicates an explicit session directory, instead of a private temporary one. This directory must not be used by another session already.

If option `-D` is *not* given, then all source files are copied to the adhoc session directory, without any subdirectory structure. Files with extension `.thy` are treated as theory files: their base names are appended to the overall list of *theories*, and thus loaded into the adhoc session, too.

Option `-E` writes session export artifacts to the local file-system: it is a combination of option `-e` from `isabelle build`, together **export\_files** from session ROOT declarations (§2.1). The declaration syntax allows to specify an explicit export directory, which is here understood as relative to the current working directory. The default directory is “**export**”.

Option `-l` specifies the parent logic session, which is produced on the spot using `isabelle build`. Options `-d`, `-o`, `-v` work as in `isabelle build`.

Option `-O` enables output of prover messages. Options `-H`, `-M`, `-U`, `-m` work as in `isabelle build_log`.

## Examples

Process a theory from a different session in the context of the default logic (HOL):

```
isabelle process_theories HOL-Library.Multiset
```

Process a theory with prover output enabled (using Unicode symbols):

```
isabelle process_theories -U -O HOL-Library.Multiset
```

Process a theory with prover output enabled, including proof states:

```
isabelle process_theories -U -O -o show_states HOL-Library.Multiset
```

Process a self-contained theory file from the Isabelle distribution, outside of its original session context:

```
isabelle process_theories -f '~~/src/HOL/Examples/Seq.thy'
```

Process a theory with session export artifacts, stemming from the Isabelle/HOL code generator (result directory “code”):

```
isabelle process_theories -E '[1] "*:code/**"' HOL-Decision_Procs.Cooper
```

---

## Presenting theories

---

Isabelle provides several ways to present the outcome of formal developments, including WWW-based browsable libraries or actual printable documents. Presentation is centered around the concept of *sessions* (chapter 2). The global session structure is that of a tree, with Isabelle Pure at its root, further object-logics derived (e.g. HOLCF from HOL, and HOL from Pure), and application sessions further on in the hierarchy.

The command-line tools `isabelle mkroot` and `isabelle build` provide the primary means for managing Isabelle sessions, including options for presentation: “`document=pdf`” generates PDF output from the theory session, and “`document_output=dir`” emits a copy of the document sources with the PDF into the given directory (relative to the session directory).

Alternatively, `isabelle document` may be used to turn the generated  $\text{\LaTeX}$  sources of a session (exports from its session build database) into PDF.

### 3.1 Generating HTML browser information

As a side-effect of building sessions, Isabelle is able to generate theory browsing information, including HTML documents that show the theory sources and the relationship with its ancestors and descendants. Besides the HTML file that is generated for every theory, Isabelle stores links to all theories of a session in an index file. As a second hierarchy, groups of sessions are organized as *chapters*, with a separate index. Note that the implicit tree structure of the session build hierarchy is *not* relevant for the presentation.

To generate theory browsing information for an existing session, just invoke `isabelle build` with suitable options:

```
isabelle build -o browser_info -v -c FOL
```

The presentation output will appear in a sub-directory `$ISABELLE_BROWSER_INFO`, according to the chapter and session name.



Many Isabelle sessions (such as HOL-Library in `~/src/HOL/Library`) also provide theory documents in PDF. These are prepared automatically as well if enabled like this:

```
isabelle build -o browser_info -o document -v -c HOL-Library
```

Enabling both browser info and document preparation simultaneously causes an appropriate “document” link to be included in the HTML index. Documents may be generated independently of browser information as well, see §3.3 for further details.

The theory browsing information is stored in the directory determined by the `ISABELLE_BROWSER_INFO` setting, with sub-directory structure according to the chapter and session name. In order to present Isabelle applications on the web, the corresponding subdirectory from `ISABELLE_BROWSER_INFO` can be put on a WWW server.

## 3.2 Creating session root directories

The `isabelle mkroot` tool configures a given directory as session root, with some `ROOT` file and optional document source directory. Its usage is:

```
Usage: isabelle mkroot [OPTIONS] [DIRECTORY]
```

Options are:

<code>-A LATEX</code>	provide author in LaTeX notation (default: user name)
<code>-I</code>	init Mercurial repository and add generated files
<code>-T LATEX</code>	provide title in LaTeX notation (default: session name)
<code>-n NAME</code>	alternative session name (default: directory base name)
<code>-q</code>	quiet mode: less verbosity

Create session root directory (default: current directory).

The results are placed in the given directory *dir*, which refers to the current directory by default. The `isabelle mkroot` tool is conservative in the sense that it does not overwrite existing files or directories. Earlier attempts to generate a session root need to be deleted manually.

The generated session template will be accompanied by a formal document, with `DIRECTORY/document/root.tex` as its  $\text{\LaTeX}$  entry point (see also chapter 3).

Options `-T` and `-A` specify the document title and author explicitly, using  $\text{\LaTeX}$  source notation.

Option `-I` initializes a Mercurial repository in the target directory, and adds all generated files (without commit).

Option `-n` specifies an alternative session name; otherwise the base name of the given directory is used.

Option `-q` reduces verbosity.

The implicit Isabelle settings variable `ISABELLE_LOGIC` specifies the parent session.

## Examples

Produce session `Test` within a separate directory of the same name:

```
isabelle mkroot -q Test && isabelle build -D Test
```

Upgrade the current directory into a session `ROOT` with document preparation, and build it:

```
isabelle mkroot -q && isabelle build -D .
```

## 3.3 Preparing Isabelle session documents

The `isabelle document` tool prepares logic session documents. Its usage is:

Usage: `isabelle document [OPTIONS] SESSION`

Options are:

<code>-O DIR</code>	output directory for LaTeX sources and resulting PDF
<code>-P DIR</code>	output directory for resulting PDF
<code>-S DIR</code>	output directory for LaTeX sources
<code>-V</code>	verbose latex
<code>-d DIR</code>	include session directory
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-v</code>	verbose build

Prepare the theory document of a session.

Generated  $\text{\LaTeX}$  sources are taken from the session build database: `isabelle build` is invoked beforehand to ensure that it is up-to-date. Further files are generated on the spot, notably essential Isabelle style files, and `session.tex` to input all theory sources from the session (excluding imports from other sessions).

Options `-d`, `-o`, `-v` have the same meaning as for `isabelle build`.

Option `-V` prints full output of  $\text{\LaTeX}$  tools.

Option `-O` *dir* specifies the output directory for generated  $\text{\LaTeX}$  sources and the result PDF file. Options `-P` and `-S` only refer to the PDF and sources, respectively.

For example, for output directory “`output`” and the default document variant “`document`”, the generated document sources are placed into the subdirectory `output/document/` and the resulting PDF into `output/document.pdf`.

Isabelle is usually smart enough to create the PDF from the given `root.tex` and optional `root.bib` (bibliography) and `root.idx` (index) using standard  $\text{\LaTeX}$  tools. Actual command-lines are given by settings `ISABELLE_LUALATEX` (or `ISABELLE_PDFLATEX`), `ISABELLE_BIBTEX`, `ISABELLE_MAKEINDEX`: these variables are used without quoting in shell scripts, and thus may contain additional options.

The system option `document_build` specifies an alternative build engine, e.g. within the session `ROOT` file as “`options [document_build = pdflatex]`”. The following standard engines are available:

- `lualatex` (default) uses the shell command `$ISABELLE_LUALATEX` on the main `root.tex` file, with further runs of `$ISABELLE_BIBTEX` and `$ISABELLE_MAKEINDEX` as required.
- `pdflatex` uses `$ISABELLE_PDFLATEX` instead of `$ISABELLE_LUALATEX`, and the other tools as above.
- `build` invokes an executable script of the same name in a private directory containing all **document\_files** and other generated document sources. The script is invoked as “`./build pdf name`” for the document variant name; it needs to produce a corresponding `name.pdf` file by arbitrary means on its own.

Further engines can be defined by add-on components in Isabelle/Scala (§5.2), providing a service class derived from `isabelle.Document_Build.Engine`.

## Examples

Produce the document from session `FOL` with full verbosity, and a copy in the current directory (subdirectory `document` and file `document.pdf`):

```
isabelle document -v -V -O. FOL
```

### 3.4 Full-text search for formal theory content

The session information of a regular `isabelle build` can also be used to generate a search index for full-text search over formal theory content. To that end, the `Find_Facts` module integrates Apache Solr<sup>1</sup>, a full-text search engine, that can run embedded in a JVM process. Solr is bundled as a separate Isabelle component, and its run-time dependencies (as specified in `SOLR_JARS`) need to be added separately to the classpath of a regular Isabelle/Scala process.

A search index can be created using the `isabelle find_facts_index` tool, which has options similar to the regular `isabelle build`. User data such as search indexes is stored in `FIND_FACTS_HOME_USER`. The name of the search index can be specified via system option `find_facts_database_name`. A finished search index can be packed for later use as a regular Isabelle component using the `isabelle find_facts_index_build` tool, with a `.db` file and `etc/settings` to augment `FIND_FACTS_INDEXES` for use by `isabelle find_facts_server`.

The user interface of the search is available as web application that can be started with the `isabelle find_facts_server` tool. Its usage is:

Usage: `isabelle find_facts_server [OPTIONS]`

Options are:

<code>-d</code>	devel mode
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-p PORT</code>	explicit web server port
<code>-v</code>	verbose server

Run server for `Find_Facts`.

This Isabelle/Scala HTTP server provides the both the front-end (implemented in the Elm<sup>2</sup> language) and REST endpoints for search queries with JSON data.

Options `-o` and `-v` have the same meaning as in `isabelle build`.

Option `-d` re-compiles the front-end in `$FIND_FACTS_HOME_USER/web` on page reload (when sources are changed).

Option `-p` specifies an explicit TCP port for the server socket (assigned by the operating system per default). For public-facing servers, a common scheme

---

<sup>1</sup><https://solr.apache.org>

<sup>2</sup><https://elm-lang.org>

is `-p 8080` that is access-restricted via firewall rules, with a reverse proxy<sup>3</sup> in system space (that also handles SSL) on ports 80 and 443.

---

<sup>3</sup>E.g. via Caddy <https://caddyserver.com/docs>

---

## The Isabelle server

---

An Isabelle session requires at least two processes, which are both rather heavy: Isabelle/Scala for the system infrastructure and Isabelle/ML for the logic session (e.g. HOL). In principle, these processes can be invoked directly on the command-line, e.g. via `isabelle java`, `isabelle scala`, `isabelle ML_process`, `isabelle console`, but this approach is inadequate for reactive applications that require quick responses from the prover.

In contrast, the Isabelle server exposes Isabelle/Scala as a “terminate-stay-resident” application that manages multiple logic *sessions* and concurrent tasks to use *theories*. This is analogous to `Thy_Info.use_theories` in Isabelle/ML, with proper support for concurrent invocations.

The client/server arrangement via TCP sockets also opens possibilities for remote Isabelle services that are accessed by local applications, e.g. via an SSH tunnel.

### 4.1 Command-line tools

#### 4.1.1 Server

The `isabelle server` tool manages resident server processes:

Usage: `isabelle server [OPTIONS]`

Options are:

<code>-L FILE</code>	logging on FILE
<code>-c</code>	console interaction with specified server
<code>-l</code>	list servers (alternative operation)
<code>-n NAME</code>	explicit server name (default: <code>isabelle</code> )
<code>-p PORT</code>	explicit server port
<code>-s</code>	assume existing server, no implicit startup
<code>-x</code>	exit specified server (alternative operation)

Manage resident Isabelle servers.

The main operation of `isabelle server` is to ensure that a named server

is running, either by finding an already running process (according to the central database file `$ISABELLE_HOME_USER/servers.db`) or by becoming itself a new server that accepts connections on a particular TCP socket. The server name and its address are printed as initial output line. If another server instance is already running, the current `isabelle server` process will terminate; otherwise, it keeps running as a new server process until an explicit `shutdown` command is received. Further details of the server socket protocol are explained in §4.2.

Other server management operations are invoked via options `-l` and `-x` (see below).

Option `-n` specifies an alternative server name: at most one process for each name may run, but each server instance supports multiple connections and logic sessions.

Option `-p` specifies an explicit TCP port for the server socket (which is always on `localhost`): the default is to let the operating system assign a free port number.

Option `-s` strictly assumes that the specified server process is already running, skipping the optional server startup phase.

Option `-c` connects the console in/out channels after the initial check for a suitable server process. Also note that the `isabelle client` tool (§4.1.2) provides a command-line editor to interact with the server.

Option `-L` specifies a log file for exceptional output of internal server and session operations.

Operation `-l` lists all active server processes with their connection details.

Operation `-x` exits the specified server process by sending it a `shutdown` command.

### 4.1.2 Client

The `isabelle client` tool provides console interaction for Isabelle servers:

Usage: `isabelle client [OPTIONS]`

Options are:

<code>-n NAME</code>	explicit server name
<code>-p PORT</code>	explicit server port

Console interaction for Isabelle server (with line-editor).

This is a wrapper to `isabelle server -s -c` for interactive experimentation, which uses `ISABELLE_LINE_EDITOR` if available. The server name is sufficient for identification, as the client can determine the connection details from the local database of active servers.

Option `-n` specifies an explicit server name as in `isabelle server`.

Option `-p` specifies an explicit server port as in `isabelle server`.

### 4.1.3 Examples

Ensure that a particular server instance is running in the background:

```
isabelle server -n test &
```

The first line of output presents the connection details:<sup>1</sup>

```
server "test" = 127.0.0.1:4711 (password "XYZ")
```

List available server processes:

```
isabelle server -l
```

Connect the command-line client to the above test server:

```
isabelle client -n test
```

Interaction now works on a line-by-line basis, with commands like `help` or `echo`. For example, some JSON values may be echoed like this:

```
echo 42
echo [1, 2, 3]
echo {"a": "text", "b": true, "c": 42}
```

Closing the connection (via CTRL-D) leaves the server running: it is possible to reconnect again, and have multiple connections at the same time.

Exit the named server on the command-line:

```
isabelle server -n test -x
```

---

<sup>1</sup>This information may be used in other TCP clients, without access to Isabelle/Scala and the underlying database of running servers.



## 4.2 Protocol messages

The Isabelle server listens on a regular TCP socket, using a line-oriented protocol of structured messages. Input *commands* and output *results* (via OK or ERROR) are strictly alternating on the toplevel, but commands may also return a *task* identifier to indicate an ongoing asynchronous process that is joined later (via FINISHED or FAILED). Asynchronous NOTE messages may occur at any time: they are independent of the main command-result protocol.

For example, the synchronous `echo` command immediately returns its argument as OK result. In contrast, the asynchronous `session_build` command returns OK `{"task":id}` and continues in the background. It will eventually produce FINISHED `{"task":id,...}` or FAILED `{"task":id,...}` with the final result. Intermediately, it may emit asynchronous messages of the form NOTE `{"task":id,...}` to inform about its progress. Due to the explicit task identifier, the client can show these messages in the proper context, e.g. a GUI window for this particular session build job.

Subsequently, the protocol message formats are described in further detail.

### 4.2.1 Byte messages

The client-server connection is a raw byte-channel for bidirectional communication, but the Isabelle server always works with messages of a particular length. Messages are written as a single chunk that is flushed immediately.

Message boundaries are determined as follows:

- A *short message* consists of a single line: it is a sequence of arbitrary bytes excluding CR (13) and LF (10), and terminated by CR-LF or just LF.
- A *long message* starts with a single line consisting of decimal digits: these are interpreted as length of the subsequent block of arbitrary bytes. A final line-terminator (as above) may be included here, but is not required.

Messages in JSON format (see below) always fit on a single line, due to escaping of newline characters within string literals. This is convenient for interactive experimentation, but it can impact performance for very long messages. If the message byte-length is given on the preceding line, the server can read the message more efficiently as a single block.

### 4.2.2 Text messages

Messages are read and written as byte streams (with byte lengths), but the content is always interpreted as plain text in terms of the UTF-8 encoding.<sup>2</sup> Note that line-endings and other formatting characters are invariant wrt. UTF-8 representation of text: thus implementations are free to determine the overall message structure before or after applying the text encoding.

### 4.2.3 Input and output messages

The uniform format for server input and output messages is *name argument*, such that:

- *name* is the longest prefix consisting of ASCII letters, digits, “\_”, “.”,
- the separator between *name* and *argument* is the longest possible sequence of ASCII blanks (it could be empty, e.g. when the argument starts with a quote or bracket),
- *argument* is the rest of the message without line terminator.

Input messages are sent from the client to the server. Here the *name* specifies a *server command*: the list of known commands may be retrieved via the `help` command.

Output messages are sent from the server to the client. Here the *name* specifies the *server reply*, which always has a specific meaning as follows:

- synchronous results: OK or ERROR
- asynchronous results: FINISHED or FAILED
- intermediate notifications: NOTE

The *argument* format is uniform for both input and output messages:

- empty argument (Scala type `Unit`)
- XML element in YXML notation (Scala type `XML.Elem`)
- JSON value (Scala type `JSON.T`)

---

<sup>2</sup>See also the “UTF-8 Everywhere Manifesto” <https://utf8everywhere.org>.

JSON values may consist of objects (records), arrays (lists), strings, numbers, booleans, or null.<sup>3</sup> Since JSON requires explicit quotes and backslash-escapes to represent arbitrary text, the YXML notation for XML trees (§1.6) works better for large messages with a lot of PIDE markup.

Nonetheless, the most common commands use JSON by default: big chunks of text (theory sources etc.) are taken from the underlying file-system and results are pre-formatted for plain-text output, without PIDE markup information. This is a concession to simplicity: the server imitates the appearance of command-line tools on top of the Isabelle/PIDE infrastructure.

#### 4.2.4 Initial password exchange

Whenever a new client opens the server socket, the initial message needs to be its unique password as a single line, without length indication (i.e. a “short message” in the sense of §4.2.1).

The server replies either with `OK` (and some information about the Isabelle version) or by silent disconnection of what is considered an illegal connection attempt. Note that `isabelle client` already presents the correct password internally.

Server passwords are created as Universally Unique Identifier (UUID) in Isabelle/Scala and stored in a per-user database, with restricted file-system access only for the current user. The Isabelle/Scala server implementation is careful to expose the password only on private output channels, and not on a process command-line (which is accessible to other users, e.g. via the `ps` command).

#### 4.2.5 Synchronous commands

A *synchronous command* corresponds to regular function application in Isabelle/Scala, with single argument and result (regular or error). Both the argument and the result may consist of type `Unit`, `XML.Elem`, `JSON.T`. An error result typically consists of a JSON object with error message and potentially further result fields (this resembles exceptions in Scala).

These are the protocol exchanges for both cases of command execution:

	<b>input:</b>	<i>command argument</i>
(a) regular	<b>output:</b>	<code>OK</code> <i>result</i>
(b) error	<b>output:</b>	<code>ERROR</code> <i>result</i>

---

<sup>3</sup>See also the official specification <https://www.json.org> and unofficial explorations “Parsing JSON is a Minefield” [http://seriot.ch/parsing\\_json.php](http://seriot.ch/parsing_json.php).

### 4.2.6 Asynchronous commands

An *asynchronous command* corresponds to an ongoing process that finishes or fails eventually, while emitting arbitrary notifications in between. Formally, it starts as synchronous command with immediate result **OK** giving the **task** identifier, or an immediate **ERROR** that indicates bad command syntax. For a running task, the termination is indicated later by **FINISHED** or **FAILED**, together with its ultimate result value.

These are the protocol exchanges for various cases of command task execution:

	<b>input:</b>	<i>command argument</i>
immediate	<b>output:</b>	<b>OK</b> {"task": <i>id</i> }
intermediate	<b>output:</b>	<b>NOTE</b> {"task": <i>id</i> , ...}
(a) regular	<b>output:</b>	<b>FINISHED</b> {"task": <i>id</i> , ...}
(b) error	<b>output:</b>	<b>FAILED</b> {"task": <i>id</i> , ...}

	<b>input:</b>	<i>command argument</i>
immediate	<b>output:</b>	<b>ERROR</b> ...


All asynchronous messages are decorated with the task identifier that was revealed in the immediate (synchronous) result. Thus the client can invoke further asynchronous commands and still dispatch the resulting stream of asynchronous messages properly.



The synchronous command **cancel** {"task": *id*} tells the specified task to terminate prematurely: usually causing a **FAILED** result, but this is not guaranteed: the cancel event may come too late or the running process may just ignore it.

## 4.3 Types for JSON values

In order to specify concrete JSON types for command arguments and result messages, the following type definition language shall be used:

*type\_def*



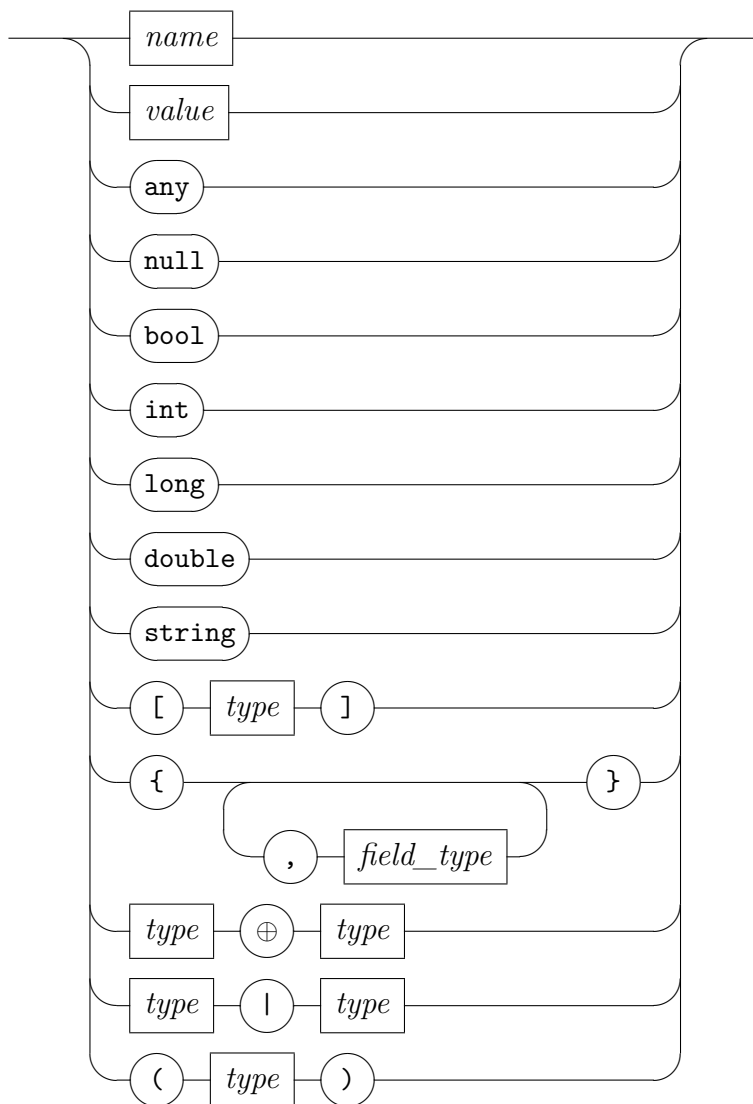*type**field\_type*

This is a simplified variation of TypeScript interfaces.<sup>4</sup> The meaning of these types is specified wrt. the Isabelle/Scala implementation as follows.

<sup>4</sup><https://www.typescriptlang.org/docs/handbook/interfaces.html>

- A *name* refers to a type defined elsewhere. The environment of type definitions is given informally: put into proper foundational order, it needs to specify a strongly normalizing system of syntactic abbreviations; type definitions may not be recursive.
- A *value* in JSON notation represents the singleton type of the given item. For example, the string `"error"` can be used as type for a slot that is guaranteed to contain that constant.
- Type *any* is the super type of all other types: it is an untyped slot in the specification and corresponds to `Any` or `JSON.T` in Isabelle/Scala.
- Type *null* is the type of the improper value *null*; it corresponds to type `Null` in Scala and is normally not used in Isabelle/Scala.<sup>5</sup>
- Type *bool* is the type of the truth values `true` and `false`; it corresponds to `Boolean` in Scala.
- Types *int*, *long*, *double* are specific versions of the generic *number* type, corresponding to `Int`, `Long`, `Double` in Scala, but `Long` is limited to 53 bit precision.<sup>6</sup>
- Type *string* represents Unicode text; it corresponds to type `String` in Scala.
- Type `[t]` is the array (or list) type over *t*; it corresponds to `List[t]` in Scala. The list type is co-variant as usual (i.e. monotonic wrt. the subtype relation).
- Object types describe the possible content of JSON records, with field names and types. A question mark after a field name means that it is optional. In Scala this could refer to an explicit type `Option[t]`, e.g. `{a: int, b?: string}` corresponding to a Scala case class with arguments `a: Int, b: Option[String]`.

Alternatively, optional fields can have a default value. If nothing else is specified, a standard “empty value” is used for each type, i.e. 0 for the number types, `false` for *bool*, or the empty string, array, object etc.

Object types are *permissive* in the sense that only the specified field names need to conform to the given types, but unspecified fields may be present as well.

---

<sup>5</sup>See also “Null References: The Billion Dollar Mistake” by Tony Hoare <https://www.infoq.com/presentations/Null-References-The-Billion-Dollar-Mistake-Tony-Hoare>.

<sup>6</sup>Implementations of JSON typically standardize *number* to `Double`, which can absorb `Int` faithfully, but not all of `Long`.

- The type expression  $t_1 \oplus t_2$  only works for two object types with disjoint field names: it is the concatenation of the respective *field\_type* specifications taken together. For example:  $\{task: string\} \oplus \{ok: bool\}$  is the equivalent to  $\{task: string, ok: bool\}$ .
- The type expression  $t_1 \mid t_2$  is the disjoint union of two types, either one of the two cases may occur.
- Parentheses ( $t$ ) merely group type expressions syntactically.

These types correspond to JSON values in an obvious manner, which is not further described here. For example, the JSON array `[1, 2, 3]` conforms to types `[int]`, `[long]`, `[double]`, `[any]`, `any`.

Note that JSON objects require field names to be quoted, but the type language omits quotes for clarity. Thus the object `{"a": 42, "b": "xyz"}` conforms to the type  $\{a: int, b: string\}$ , for example.

The absence of an argument or result is represented by the Scala type `Unit`: it is written as empty text in the message *argument* (§4.2.3). This is not part of the JSON language.

Server replies have name tags like `OK`, `ERROR`: these are used literally together with type specifications to indicate the particular name with the type of its argument, e.g. `OK [string]` for a regular result that is a list (JSON array) of strings.

Here are some common type definitions, for use in particular specifications of command arguments and results.

- **type** *position* =  $\{line?: int, offset?: int, end\_offset?: int, file?: string, id?: long\}$  describes a source position within Isabelle text. Only the *line* and *file* fields make immediate sense to external programs. Detailed *offset* and *end\_offset* positions are counted according to Isabelle symbols, see `Symbol.symbol` in Isabelle/ML [4]. The position *id* belongs to the representation of command transactions in the Isabelle/PIDE protocol: it normally does not occur in externalized positions.
- **type** *message* =  $\{kind: string, message: string, pos?: position\}$  where the *kind* provides some hint about the role and importance of the message. The main message kinds are `writeln` (for regular output), `warning`, `error`.

- **type** *error\_message* = {*kind*: "error", *message*: string} refers to error messages in particular. These occur routinely with **ERROR** or **FAILED** replies, but also as initial command syntax errors (which are omitted in the command specifications below).
- **type** *theory\_progress* = {*kind*: "writeln", *message*: string, *theory*: string, *session*: string, *percentage?*: int} reports formal progress in loading theories (e.g. when building a session image). Apart from a regular output message, it also reveals the formal theory name (e.g. "HOL.Nat") and session name (e.g. "HOL"). Note that some rare theory names lack a proper session prefix, e.g. theory "Main" in session "HOL". The optional percentage has the same meaning as in **type** *node\_status* below.
- **type** *timing* = {*elapsed*: double, *cpu*: double, *gc*: double} refers to common Isabelle timing information in seconds, usually with a precision of three digits after the point (whole milliseconds).
- **type** *uuid* = string refers to a Universally Unique Identifier (UUID) as plain text.<sup>7</sup> Such identifiers are created as private random numbers of the server and only revealed to the client that creates a certain resource (e.g. task or session). A client may disclose this information for use in a different client connection: this allows to share sessions between multiple connections.

Client commands need to provide syntactically wellformed UUIDs: this is trivial to achieve by using only identifiers that have been produced by the server beforehand.

- **type** *task* = {*task*: uuid} identifies a newly created asynchronous task and thus allows the client to control it by the **cancel** command. The same task identification is included in all messages produced by this task.
- **type** *session\_id* = {*session\_id*: uuid} identifies a newly created PIDE session managed by the server. Sessions are independent of client connections and may be shared by different clients, as long as the internal session identifier is known.
- **type** *node* = {*node\_name*: string, *theory\_name*: string} represents the internal node name of a theory. The *node\_name* is derived from the canonical theory file-name (e.g. "~/src/HOL/Examples/Seq.thy"

---

<sup>7</sup>See <https://www.ietf.org/rfc/rfc4122.txt> and <https://docs.oracle.com/en/java/javase/21/docs/api/java.base/java/util/UUID.html>.



after normalization within the file-system). The *theory\_name* is the session-qualified theory name (e.g. `HOL-Examples.Seq`).

- **type** *node\_status* = {*ok*: *bool*, *total*: *int*, *unprocessed*: *int*, *running*: *int*, *warned*: *int*, *failed*: *int*, *finished*: *int*, *canceled*: *bool*, *consolidated*: *bool*, *percentage*: *int*} represents a formal theory node status of the PIDE document model as follows.
  - Fields *total*, *unprocessed*, *running*, *warned*, *failed*, *finished* account for individual commands within a theory node; *ok* is an abstraction for *failed* = 0.
  - The *canceled* flag tells if some command in the theory has been spontaneously canceled (by an Interrupt exception that could also indicate resource problems).
  - The *consolidated* flag indicates whether the outermost theory command structure has finished (or failed) and the final **end** command has been checked.
  - The *percentage* field tells how far the node has been processed. It ranges between 0 and 99 in normal operation, and reaches 100 when the node has been formally consolidated as described above.

## 4.4 Server commands and results

Here follows an overview of particular Isabelle server commands with their results, which are usually represented as JSON values with types according to §4.3. The general format of input and output messages is described in §4.2.3. The relevant Isabelle/Scala source files are:

```
$ISABELLE_HOME/src/Pure/Tools/server_commands.scala
$ISABELLE_HOME/src/Pure/Tools/server.scala
$ISABELLE_HOME/src/Pure/General/json.scala
```

### 4.4.1 Command help

regular result: `OK [string]`

The `help` command has no argument and returns the list of server command names. This is occasionally useful for interactive experimentation (see also `isabelle client` in §4.1.2).

### 4.4.2 Command echo

argument: *any*  
regular result: OK *any*

The `echo` command is the identity function: it returns its argument as regular result. This is occasionally useful for testing and interactive experimentation (see also `isabelle client` in §4.1.2).

The Scala type of `echo` is actually more general than given above: `Unit`, `XML.Elem`, `JSON.T` work uniformly. Note that `XML.Elem` might be difficult to type on the console in its YXML syntax (§1.6).

### 4.4.3 Command shutdown

regular result: OK

The `shutdown` command has no argument and result value. It forces a shutdown of the connected server process, stopping all open sessions and closing the server socket. This may disrupt pending commands on other connections!

The command-line invocation `isabelle server -x` opens a server connection and issues a `shutdown` command (see also §4.1.1).

### 4.4.4 Command cancel

argument: *task*  
regular result: OK

The command `cancel {"task": id}` attempts to cancel the specified task. Cancellation is merely a hint that the client prefers an ongoing process to be stopped. The command always succeeds formally, but it may get ignored by a task that is still running; it might also refer to a non-existing or no-longer existing task (without producing an error).

Successful cancellation typically leads to an asynchronous failure of type `FAILED {task: uuid, message: "Interrupt"}`. A different message is also possible, depending how the task handles the event.

### 4.4.5 Command `session_build`

argument: *session\_build\_args*  
 immediate result: `OK task`  
 notifications: `NOTE task`  $\oplus$  (*theory\_progress* | *message*)  
 regular result: `FINISHED task`  $\oplus$  *session\_build\_results*  
 error result: `FAILED task`  $\oplus$  *error\_message*  $\oplus$  *session\_build\_results*

```

type session_build_args =
  {session: string,
   preferences?: string,           default: server preferences
   options?: [string],
   dirs?: [string],
   include_sessions: [string],
   verbose?: bool}

```

```

type session_build_result =
  {session: string,
   ok: bool,
   return_code: int,
   timeout: bool,
   timing: timing}

```

```

type session_build_results =
  {ok: bool,
   return_code: int,
   sessions: [session_build_result]}

```

The `session_build` command prepares a session image for interactive use of theories. This is a limited version of command-line tool `isabelle build` (§2.3), with specific options to request a formal context for an interactive PIDE session.

The build process is asynchronous, with notifications that inform about the progress of loaded theories. Some further informative messages are output as well.

Coordination of independent build processes is at the discretion of the client (or end-user), just as for `isabelle build` and `isabelle jedit`. There is no built-in coordination of conflicting builds with overlapping hierarchies of session images. In the worst case, a session image produced by one task may get overwritten by another task!

## Arguments

The *session* field specifies the target session name. The build process will produce all required ancestor images according to the overall session graph.

The environment of Isabelle system options is determined from *preferences* that are augmented by *options*, which is a list individual updates of the form the *name=value* or *name* (the latter abbreviates *name=true*); see also command-line option `-o` for `isabelle build`. The preferences are loaded from the file `$ISABELLE_HOME_USER/etc/preferences` by default, but the client may provide alternative contents for it (as text, not a file-name). This could be relevant in situations where client and server run in different operating-system contexts.

The *dirs* field specifies additional directories for session ROOT and ROOTS files (§2.1). This augments the name space of available sessions; see also option `-d` in `isabelle build`.

The *include\_sessions* field specifies sessions whose theories should be included in the overall name space of session-qualified theory names. This corresponds to a **sessions** specification in ROOT files (§2.1). It enables the `use_theories` command (§4.4.8) to refer to sources from other sessions in a robust manner, instead of relying on directory locations.

## Intermediate output

The asynchronous notifications of command `session_build` mainly serve as progress indicator: the output resembles that of the session build window of Isabelle/jEdit after startup [6].

For the client it is usually sufficient to print the messages in plain text, but note that *theory\_progress* also reveals formal *theory* and *session* names directly.

## Results

The overall *session\_build\_results* contain both a summary and an entry *session\_build\_result* for each session in the build hierarchy. The result is always provided, independently of overall success (FINISHED task) or failure (FAILED task).

The *ok* field tells abstractly, whether all required session builds came out as *ok*, i.e. with zero *return\_code*. A non-zero *return\_code* indicates an error according to usual POSIX conventions for process exit.

The individual *session\_build\_result* entries provide extra fields:

- *timeout* tells if the build process was aborted after running too long,
- *timing* gives the overall process timing in the usual Isabelle format with elapsed, CPU, GC time.

## Examples

Build of a session image from the Isabelle distribution:

```
session_build {"session": "HOL-Algebra"}
```

Build a session image from the Archive of Formal Proofs:

```
session_build {"session": "Coinductive", "dirs": ["$AFP_BASE/thys"]}
```

### 4.4.6 Command `session_start`

argument:	$session\_build\_args \oplus \{print\_mode?: [string]\}$
immediate result:	<code>OK task</code>
notifications:	$NOTE\ task \oplus (theory\_progress \mid message)$
regular result:	$FINISHED\ task \oplus session\_id \oplus \{tmp\_dir: string\}$
error result:	$FAILED\ task \oplus error\_message$

The `session_start` command starts a new Isabelle/PIDE session with underlying Isabelle/ML process, based on a session image that it produces on demand using `session_build`. Thus it accepts all *session\_build\_args* and produces similar notifications, but the detailed *session\_build\_results* are omitted.

The session build and startup process is asynchronous: when the task is finished, the session remains active for commands, until a `session_stop` or `shutdown` command is sent to the server.

Sessions are independent of client connections: it is possible to start a session and later apply `use_theories` on different connections, as long as the internal session identifier is known: shared theory imports will be used only once (and persist until purged explicitly).

## Arguments

Most arguments are shared with `session_build` (§4.4.5).

The `print_mode` field adds identifiers of print modes to be made active for this session. For example, `"print_mode": ["ASCII"]` prefers ASCII replacement syntax over mathematical Isabelle symbols. See also option `-m` in `isabelle ML_process` (§1.3).

## Results

The `session_id` provides the internal identification of the session object within the server process. It can remain active as long as the server is running, independently of the current client connection.

The `tmp_dir` field refers to a temporary directory that is specifically created for this session and deleted after it has been stopped. This may serve as auxiliary file-space for the `use_theories` command, but concurrent use requires some care in naming temporary files, e.g. by using sub-directories with globally unique names.

As `tmp_dir` is the default `master_dir` for commands `use_theories` and `purge_theories`, theory files copied there may be used without further path specification.

## Examples

Start a default Isabelle/HOL session:

```
session_start {"session": "HOL"}
```

Start a session from the Archive of Formal Proofs:

```
session_start {"session": "Coinductive", "dirs": ["$AFP_BASE/thys"]}
```

Start a session with fine-tuning of options:

```
session_start {"session": "HOL",
  "options": ["headless_consolidate_delay=0.5", "headless_prune_delay=5"]}
```

#### 4.4.7 Command `session_stop`

argument: *session\_id*  
 immediate result: `OK task`  
 regular result: `FINISHED task  $\oplus$  session_stop_result`  
 error result: `FAILED task  $\oplus$  error_message  $\oplus$  session_stop_result`

**type** `session_stop_result` = {*ok*: *bool*, *return\_code*: *int*}

The `session_stop` command forces a shutdown of the identified PIDE session. This asynchronous task usually finishes quickly. Failure only happens in unusual situations, according to the return code of the underlying Isabelle/ML process.

##### Arguments

The *session\_id* provides the UUID originally created by the server for this session.

##### Results

The *ok* field tells abstractly, whether the Isabelle/ML process has terminated properly.

The *return\_code* field expresses this information according to usual POSIX conventions for process exit.

#### 4.4.8 Command `use_theories`

argument: *use\_theories\_arguments*  
 immediate result: `OK task`  
 regular result: `FINISHED use_theories_results`

```

type use_theories_arguments =
  {session_id: uuid,
   theories: [string],
   master_dir?: string,           default: session tmp_dir
   pretty_margin?: double,       default: 76
   unicode_symbols?: bool,
   export_pattern?: string,
   check_delay?: double,         default: 0.5
   check_limit?: int,
   watchdog_timeout?: double,   default: 600.0
   nodes_status_delay?: double} default: -1.0

type export =
  {name: string, base64: bool, body: string}
type node_results =
  {status: node_status, messages: [message], exports: [export]}
type nodes_status =
  [node  $\oplus$  {status: node_status}]
type use_theories_results =
  {ok: bool,
   errors: [message],
   nodes: [node  $\oplus$  node_results]}

```

The `use_theories` command updates the identified session by adding the current version of theory files to it, while dependencies are resolved implicitly. The command succeeds eventually, when all theories have status *terminated* or *consolidated* in the sense of *node\_status* (§4.3).

Already used theories persist in the session until purged explicitly (§4.4.9). This also means that repeated invocations of `use_theories` are idempotent: it could make sense to do that with different values for *pretty\_margin* or *unicode\_symbols* to get different formatting for *errors* or *messages*.

A non-empty *export\_pattern* means that theory *exports* are retrieved (see §2.5). An *export name* roughly follows file-system standards: “/” separated list of base names (excluding special names like “.” or “..”). The *base64* field specifies the format of the *body* string: it is true for a byte vector that cannot be represented as plain text in UTF-8 encoding, which means the string needs to be decoded as in `java.util.Base64.getDecoder.decode(String)`.

The status of PIDE processing is checked every *check\_delay* seconds, and bounded by *check\_limit* attempts (default: 0, i.e. unbounded). A *check\_limit* > 0 effectively specifies a global timeout of *check\_delay* × *check\_limit* seconds.



If *watchdog\_timeout* is greater than 0, it specifies the timespan (in seconds) after the last command status change of Isabelle/PIDE, before finishing with a potentially non-terminating or deadlocked execution.

A non-negative *nodes\_status\_delay* enables continuous notifications of kind *nodes\_status*, with a field of name and type *nodes\_status*. The time interval is specified in seconds; by default it is negative and thus disabled.

### Arguments

The *session\_id* is the identifier provided by the server, when the session was created (possibly on a different client connection).

The *theories* field specifies theory names as in theory **imports** or in ROOT **theories**.

The *master\_dir* field specifies the master directory of imported theories: it acts like the “current working directory” for locating theory files. This is irrelevant for *theories* with an absolute path name (e.g. “`~/src/HOL/Examples/Seq.thy`”) or session-qualified theory name (e.g. “`HOL-Examples.Seq`”).

The *pretty\_margin* field specifies the line width for pretty-printing. The default is suitable for classic console output. Formatting happens at the end of **use\_theories**, when all prover messages are exported to the client.

The *unicode\_symbols* field set to **true** renders message output for direct output on a Unicode capable channel, ideally with the Isabelle fonts as in Isabelle/jEdit. The default is to keep the symbolic representation of Isabelle text, e.g. `\<forall>` instead of its rendering as  $\forall$ . This means the client needs to perform its own rendering before presenting it to the end-user.

### Results

The *ok* field indicates overall success of processing the specified theories with all their dependencies.

When *ok* is **false**, the *errors* field lists all errors cumulatively (including imported theories). The messages contain position information for the original theory nodes.

The *nodes* field provides detailed information about each imported theory node. The individual fields are as follows:

- *node\_name*: the canonical name for the theory node, based on its file-system location;
- *theory\_name*: the logical theory name;
- *status*: the overall node status, e.g. see the visualization in the *Theories* panel of Isabelle/jEdit [6];
- *messages*: the main bulk of prover messages produced in this theory (with kind `writeln`, `warning`, `error`).

## Examples

Process some example theory from the Isabelle distribution, within the context of an already started session for Isabelle/HOL (see also §4.4.6):

```
use_theories {"session_id": ..., "theories": ["~/src/HOL/Examples/Seq"]}
```

Process some example theories in the context of their (single) parent session:

```
session_start {"session": "HOL-Library"}
use_theories {"session_id": ..., "theories": ["~/src/HOL/Unix/Unix"]}
session_stop {"session_id": ...}
```

Process some example theories that import other theories via session-qualified theory names:

```
session_start {"session": "HOL", "include_sessions": ["HOL-Unix"]}
use_theories {"session_id": ..., "theories": ["HOL-Unix.Unix"]}
session_stop {"session_id": ...}
```

### 4.4.9 Command `purge_theories`

argument: `purge_theories_arguments`

regular result: `OK purge_theories_result`

**type** `purge_theories_arguments` =

`{session_id: uuid,`

`theories: [string],`

`master_dir?: string,`

`all?: bool}`

**default:** session `tmp_dir`

```
type purge_theories_result = {purged: [string]}
```

The `purge_theories` command updates the identified session by removing theories that are no longer required: theories that are used in pending `use_theories` tasks or imported by other theories are retained.

### Arguments

The *session\_id* is the identifier provided by the server, when the session was created (possibly on a different client connection).

The *theories* field specifies theory names to be purged: imported dependencies are *not* completed. Instead it is possible to provide the already completed import graph returned by `use_theories` as *nodes* / *node\_name*.

The *master\_dir* field specifies the master directory as in `use_theories`. This is irrelevant, when passing fully-qualified theory node names (e.g. *node\_name* from *nodes* in *use\_theories\_results*).

The *all* field set to `true` attempts to purge all presently loaded theories.

### Results

The *purged* field gives the theory nodes that were actually removed.

The *retained* field gives the remaining theory nodes, i.e. the complement of *purged*.

---

# Isabelle/Scala systems programming

---

Isabelle/ML and Isabelle/Scala are the two main implementation languages of the Isabelle environment:

- Isabelle/ML is for *mathematics*, to develop tools within the context of symbolic logic, e.g. for constructing proofs or defining domain-specific formal languages. See the *Isabelle/Isar implementation manual* [4] for more details.
- Isabelle/Scala is for *physics*, to connect with the world of systems and services, including editors and IDE frameworks.

There are various ways to access Isabelle/Scala modules and operations:

- Isabelle command-line tools (§5.1) run in a separate Java process.
- Isabelle/ML antiquotations access Isabelle/Scala functions (§5.3) via the PIDE protocol: execution happens within the running Java process underlying Isabelle/Scala.
- The `Console/Scala` plugin of Isabelle/jEdit [6] operates on the running Java application, using the Scala read-eval-print-loop (REPL).

The main Isabelle/Scala/jEdit functionality is provided by `$ISABELLE_HOME/lib/classes/isabelle.jar`. Further underlying Scala and Java libraries are bundled with Isabelle, e.g. to access SQLite or PostgreSQL via JDBC.

Add-on Isabelle components may augment the system environment by providing suitable configuration in `etc/settings` (GNU bash script). The shell function `classpath` helps to write `etc/settings` in a portable manner: it refers to library `jar` files in standard POSIX path notation. On Windows, this is converted to native platform format, before invoking Java (§5.1).

There is also an implicit build process for Isabelle/Scala/Java modules, based on `etc/build.props` within the component directory (see also §5.2). See `$ISABELLE_HOME/src/Tools/Demo/README.md` for an example components with command-line tools in Isabelle/Scala.

## 5.1 Command-line tools

### 5.1.1 Java Runtime Environment

The `isabelle java` tool is a direct wrapper for the Java Runtime Environment, within the regular Isabelle settings environment (§1.1) and Isabelle classpath. The command line arguments are that of the bundled Java distribution: see option `-help` in particular.

The `java` executable is taken from `ISABELLE_JDK_HOME`, according to the standard directory layout for regular distributions of OpenJDK.

The shell function `isabelle_jdk` allows shell scripts to invoke other Java tools robustly (e.g. `isabelle_jdk jar`), without depending on accidental operating system installations.

### 5.1.2 Scala toplevel

The `isabelle scala` tool is a direct wrapper for the Scala toplevel, similar to `isabelle java` above. The command line arguments are that of the bundled Scala distribution: see option `-help` in particular. This allows to interact with Isabelle/Scala interactively.

#### Example

Explore the Isabelle system environment in Scala:

```
$ isabelle scala

import isabelle._

val isabelle_home = Isabelle_System.getenv("ISABELLE_HOME")

val options = Options.init()
options.bool("browser_info")
options.string("document")
```

### 5.1.3 Scala compiler

The `isabelle scalac` tool is a direct wrapper for the Scala compiler; see also `isabelle scala` above. The command line arguments are that of the bundled Scala distribution.

This provides a low-level mechanism to compile further Scala modules, depending on existing Isabelle/Scala functionality; the resulting `class` or `jar` files can be added to the Java classpath using the shell function `classpath`.

A more convenient high-level approach works via `etc/build.props` (see §5.2).

## 5.2 Isabelle/Scala/Java modules

### 5.2.1 Component configuration via `etc/build.props`

Isabelle components may augment the Isabelle/Scala/Java environment declaratively via properties given in `etc/build.props` (within the component directory). This specifies an output `jar module`, based on Scala or Java *sources*, and arbitrary *resources*. Moreover, a module can specify *services* that are subclasses of `isabelle.Isabelle_System.Service`; these have a particular meaning to Isabelle/Scala tools.

Before running a Scala or Java process, the Isabelle system implicitly ensures that all provided modules are compiled and packaged (as jars). It is also possible to invoke `isabelle scala_build` explicitly, with extra options.

The syntax of `etc/build.props` follows a regular Java properties file<sup>1</sup>, but the encoding is UTF-8, instead of historic ISO 8859-1 from the API documentation.

The subsequent properties are relevant for the Scala/Java build process. Most properties are optional: the default is an empty string (or list). File names are relative to the main component directory and may refer to Isabelle settings variables (e.g. `$ISABELLE_HOME`).

- `title` (required) is a human-readable description of the module, used in printed messages.
- `module` specifies a `jar` file name for the output module, as result of the specified sources (and resources). If this is absent (or

---

<sup>1</sup>[https://docs.oracle.com/en/java/javase/21/docs/api/java.base/java/util/Properties.html#load\(java.io.Reader\)](https://docs.oracle.com/en/java/javase/21/docs/api/java.base/java/util/Properties.html#load(java.io.Reader))

`no_build` is set, as described below), there is no implicit build process. The contributing sources might be given nonetheless, notably for `isabelle scala_project` (§5.2.3), which includes Scala/Java sources of components, while suppressing `jar` modules (to avoid duplication of program content).

- `no_build` is a Boolean property, with default `false`. If set to `true`, the implicit build process for the given `module` is *omitted* — it is assumed to be provided by other means.
- `scalac_options` and `javac_options` augment the default settings `ISABELLE_SCALAC_OPTIONS` and `ISABELLE_JAVAC_OPTIONS` for this component; option syntax follows the regular command-line tools `scalac` and `javac`, respectively.
- `main` specifies the main entry point for the `jar` module. This is only relevant for direct invocation like “`java -jar test.jar`”.
- `requirements` is a list of `jar` modules that are needed in the compilation process, but not provided by the regular classpath (notably `ISABELLE_CLASSPATH`).

A *normal entry* refers to a single `jar` file name, possibly with settings variables as usual. E.g. `$ISABELLE_SCALA_JAR` for the main `$ISABELLE_HOME/lib/classes/isabelle.jar` (especially relevant for add-on modules).

A *special entry* is of the form `env:variable` and refers to a settings variable from the Isabelle environment: its value may consist of multiple `jar` entries (separated by colons). Environment variables are not expanded recursively.

- `resources` is a list of files that should be included in the resulting `jar` file. Each item consists of a pair separated by colon: *source:target* means to copy an existing source file (relative to the component directory) to the given target file or directory (relative to the `jar` name space). A *file* specification without colon abbreviates *file:file*, i.e. the file is copied while retaining its relative path name.
- `sources` is a list of `.scala` or `.java` files that contribute to the specified module. It is possible to use both languages simultaneously: the Scala and Java compiler will be invoked consecutively to make this work.

- **services** is a list of class names to be registered as Isabelle service providers (subclasses of `isabelle.Isabelle_System.Service`). Internal class names of the underlying JVM need to be given: e.g. see method `java.lang.Object.getClass`.

Particular services require particular subclasses: instances are filtered according to their dynamic type. For example, class `isabelle.Isabelle_Scala_Tools` collects Scala command-line tools, and class `isabelle.Scala.Functions` collects Scala functions (§5.3).

### 5.2.2 Explicit Isabelle/Scala/Java build

The `isabelle scala_build` tool explicitly invokes the build process for all registered components.

Usage: `isabelle scala_build [OPTIONS]`

Options are:

<code>-f</code>	force fresh build
<code>-q</code>	quiet mode: suppress stdout/stderr

Build Isabelle/Scala/Java modules of all registered components (if required).

For each registered Isabelle component that provides `etc/build.props`, the specified output module is checked against the corresponding input requirements, resources, sources. If required, there is an automatic build using `scalac` or `javac` (or both). The identity of input files is recorded within the output jar, using SHA1 digests in `META-INF/isabelle/shasum`.

Option `-f` forces a fresh build, regardless of the up-to-date status of input files vs. the output module.

Option `-q` suppresses all output on stdout/stderr produced by the Scala or Java compiler.

Explicit invocation of `isabelle scala_build` mainly serves testing or applications with special options: the Isabelle system normally does an automatic the build on demand.



### 5.2.3 Project setup for common Scala IDEs

The `isabelle scala_project` tool creates a project configuration for all Isabelle/Java/Scala modules specified in components via `etc/build.props`, together with additional source files given on the command-line:

Usage: `isabelle scala_project [OPTIONS] [MORE_SOURCES ...]`

Options are:

<code>-D DIR</code>	project directory (default: "\$ISABELLE_HOME_USER/scala_project")
<code>-G</code>	use Gradle as build tool
<code>-L</code>	make symlinks to original source files
<code>-M</code>	use Maven as build tool
<code>-f</code>	force update of existing directory
<code>-v</code>	verbose

Setup project for Isabelle/Scala/jEdit --- to support common IDEs such as IntelliJ IDEA. Either option `-G` or `-M` is mandatory to specify the build tool.

The generated configuration is for Gradle<sup>2</sup> or Maven<sup>3</sup>, but the main purpose is to import it into common IDEs like IntelliJ IDEA<sup>4</sup>. This allows to explore the sources with static analysis and other hints in real-time.

The generated files refer to physical file-system locations, using the path notation of the underlying OS platform. Thus the project needs to be recreated whenever the Isabelle installation is changed or moved.

Option `-G` selects Gradle and `-M` selects Maven as Java/Scala build tool: either one needs to be specified explicitly. These tools have a tendency to break down unexpectedly, so supporting both increases the chances that the generated IDE project works properly.

Option `-L` produces *symlinks* to the original files: this allows to develop Isabelle/Scala/jEdit modules within an external IDE. The default is to *copy* source files, so editing them within the IDE has no permanent effect on the originals.

Option `-D` specifies an explicit project directory, instead of the default `$ISABELLE_HOME_USER/scala_project`. Option `-f` forces an existing project directory to be *purged* — after some sanity checks that it has been generated by `isabelle scala_project` before.

Option `-v` enables verbose mode.

---

<sup>2</sup><https://gradle.org>

<sup>3</sup><https://maven.apache.org>

<sup>4</sup><https://www.jetbrains.com/idea>

## Examples

Create a project directory and for editing the original sources:

```
isabelle scala_project -f -L
```

On Windows, this usually requires Administrator rights, in order to create native symlinks.

## 5.3 Registered Isabelle/Scala functions

### 5.3.1 Defining functions in Isabelle/Scala

The service class `isabelle.Scala.Functions` collects Scala functions of type `isabelle.Scala.Fun`: by registering instances via `services` in `etc/build.props` (§5.2), it becomes possible to invoke Isabelle/Scala from Isabelle/ML (see below).


An example is the predefined collection of `isabelle.Scala.Functions` in `$ISABELLE_HOME/etc/build.props`. The overall list of registered functions is accessible in Isabelle/Scala as `isabelle.Scala.functions`.

The general class `isabelle.Scala.Fun` expects a multi-argument / multi-result function `List[isabelle.Bytes] => List[isabelle.Bytes]`; more common are instances of `isabelle.Scala.Fun_Strings` for type `List[String] => List[String]`, or `isabelle.Scala.Fun_String` for type `String => String`.

### 5.3.2 Invoking functions in Isabelle/ML

Isabelle/PIDE provides a protocol to invoke registered Scala functions in ML: this works both within the Prover IDE and in batch builds.

The subsequent ML antiquotations refer to Scala functions in a formally-checked manner.

$$\begin{aligned} \textit{scala\_function} &: \textit{ML\_antiquotation} \\ \textit{scala} &: \textit{ML\_antiquotation} \end{aligned}$$


`@{scala_function name}` inlines the checked function name as ML string literal.

`@{scala name}` and `@{scala_thread name}` invoke the checked function via the PIDE protocol. In Isabelle/ML this appears as a function of type `string list -> string list` or `string -> string`, depending on the definition in Isabelle/Scala. Evaluation is subject to interrupts within the ML runtime environment as usual. A `null` result in Scala raises an exception `Scala.Null` in ML. The execution of `@{scala}` works via a Scala future on a bounded thread farm, while `@{scala_thread}` always forks a separate Java/VM thread.

The standard approach of representing datatypes via strings works via XML in YXML transfer syntax. See Isabelle/ML operations and modules `YXML.string_of_body`, `YXML.parse_body`, `XML.Encode`, `XML.Decode`; similarly for Isabelle/Scala. Isabelle symbols may have to be recoded via Scala operations `isabelle.Symbol.decode` and `isabelle.Symbol.encode`.

## Examples

Invoke the predefined Scala function `echo`:

```
ML <
  val s = "test";
  val s' = scala<echo> s;
  assert (s = s')
>
```

Let the Scala compiler process some toplevel declarations, producing a list of errors:

```
ML <
  val source = "class A(a: Int, b: Boolean)"
  val errors =
    scala<scala_toplevel> source
    /> YXML.parse_body
    /> let open XML.Decode in list string end;




  assert (null errors)>
```

The above is merely for demonstration. See `Scala_Compiler.toplevel` for a more convenient version with builtin decoding and treatment of errors.


## 5.4 Documenting Isabelle/Scala entities

The subsequent document antiquotations help to document Isabelle/Scala entities, with formal checking of names against the Isabelle classpath.


*scala* : antiquotation  
*scala\_object* : antiquotation  
*scala\_type* : antiquotation  
*scala\_method* : antiquotation




*class*



*types*

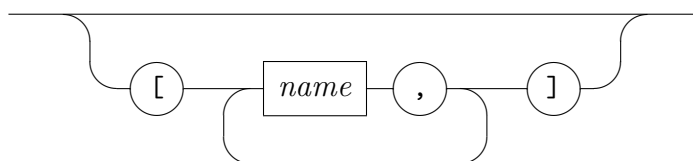

*args*

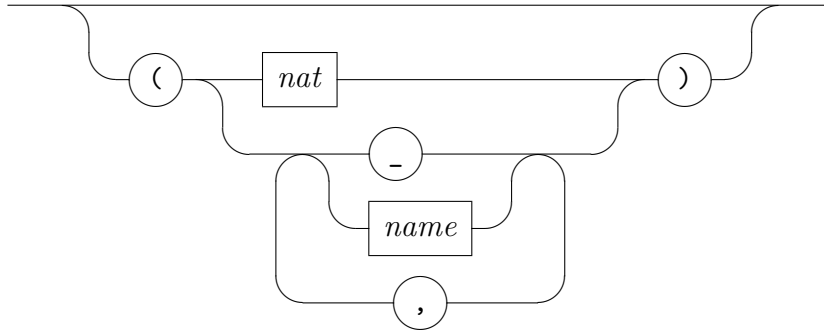

$@\{scala\ s\}$  is similar to  $@\{verbatim\ s\}$ , but the given source text is checked by the Scala compiler as toplevel declaration (without evaluation). This allows to write Isabelle/Scala examples that are statically checked.

$@\{scala\_object\ x\}$  checks the given Scala object name (simple value or ground module) and prints the result verbatim.

$@\{scala\_type\ T[A]\}$  checks the given Scala type name (with optional type parameters) and prints the result verbatim.

$@\{scala\_method\ (in\ c[A])\ m[B](n)\}$  checks the given Scala method  $m$  in the context of class  $c$ . The method argument slots are either specified by a number  $n$  or by a list of (optional) argument types; this may refer to type variables specified for the class or method:  $A$  or  $B$  above.

Everything except for the method name  $m$  is optional. The absence of the class context means that this is a static method. The absence of arguments with types means that the method can be determined uniquely as  $(m\ \_)$  in Scala (no overloading).

## Examples

Miscellaneous Isabelle/Scala entities:

- object: `isabelle.Isabelle_Process`
- type without parameter: `isabelle.Console_Progress`
- type with parameter: `List[A]`
- static method: `isabelle.Isabelle_System.bash`

- class and method with type parameters: `List[A].map`
- overloaded method with argument type: `Int.+`

---

## Phabricator / Phorge server setup

---

The Isabelle development site <https://isabelle-dev.sketis.net> uses Phorge to provide a comprehensive view on several repositories: Isabelle proper, the Archive of Formal Proofs, and Poly/ML.

Phorge<sup>1</sup> is an open-source product to support the development process of complex software projects (open or closed ones). It is a community fork to replace the former Phabricator<sup>2</sup> project, which is now inactive. Subsequently, the product name is always *Phorge* instead of *Phabricator*, but files and other formal names usually refer to **phabricator**.

Following the original tradition of Phabricator, almost everything in Phorge is a bit different and unusual. The official project description is:

Your opinionated Free/Libre and Open Source, community driven platform for collaborating, managing, organizing and reviewing software projects.

Ongoing changes and discussions about changes are maintained uniformly within a MySQL database. There are standard connections to major version control systems: **Subversion**, **Mercurial**, **Git**. So Phorge offers a counter-model to trends of monopoly and centralized version control, especially due to Microsoft's Github and Atlassian's Bitbucket.

A notable public instance of Phorge is running on <https://gitpull.it>. Independent *self-hosting* requires an old-school LAMP server (Linux, Apache, MySQL, PHP): a cheap virtual machine on the Net is sufficient, there is no need for special “cloud” providers. So it is feasible to remain the master of your virtual home, according to the principle “to own all your data”. Thus Phorge is similar to the well-known Nextcloud<sup>3</sup> server product, concerning both the technology and sociology.

---

<sup>1</sup><https://phorge.it>

<sup>2</sup><https://www.phacility.com/phabricator>

<sup>3</sup><https://nextcloud.com>

Initial Phorge configuration requires many details to be done right. Isabelle provides some command-line tools to help with the setup, and afterwards Isabelle support is optional: it is possible to run and maintain the server, without requiring the somewhat bulky Isabelle distribution again.

Assuming an existing installation of Phorge, the Isabelle command-line tool `isabelle hg_setup` (§7.6) helps to create new repositories or to migrate old ones. In particular, this avoids the lengthy sequence of clicks in Phorge to make a new private repository with hosting on the server. (Phorge is a software project management platform, where initial repository setup happens rarely in practice.)

## 6.1 Quick start

The starting point is a fresh installation of **Ubuntu 22.04 or 24.04 LTS**<sup>4</sup>: these versions are mandatory due to subtle dependencies on system packages and configuration that is assumed by the Isabelle setup tool.

For production use, a proper *Virtual Server* or *Root Server* product from a hosting provider will be required, including an Internet Domain Name (§6.1.4). Initial experimentation also works on a local host, e.g. via VirtualBox<sup>5</sup>. The proforma domain `localhost` is used by default: it maps arbitrary subdomains to the usual `localhost` address. This allows to use e.g. `http://phabricator-vcs.localhost` for initial setup as described below.

All administrative commands need to be run as `root` user (e.g. via `sudo`). Note that Isabelle refers to user-specific configuration in the user home directory via `ISABELLE_HOME_USER` (§1.1); that may be different or absent for the root user and thus cause confusion.

### 6.1.1 Initial setup

Isabelle can manage multiple named Phorge installations: this allows to separate administrative responsibilities, e.g. different approaches to user management for different projects. Subsequently we always use the default name “`vcs`”: the name will appear in file and directory locations, internal database names and URLs.

The initial setup works as follows (with full Linux package upgrade):

```
isabelle phabricator_setup -U -M:
```

---

<sup>4</sup><https://ubuntu.com/download>

<sup>5</sup><https://www.virtualbox.org>



After installing many packages, cloning the Phorge distribution, initializing the MySQL database and Apache, the tool prints an URL for further configuration. Now the following needs to be provided by the web interface.

- An initial user that will get administrator rights. There is no need to create a special `admin` account. Instead, a regular user that will take over this responsibility can be used here. Subsequently we assume that user `makarius` becomes the initial administrator.
- An *Auth Provider* to manage user names and passwords. None is provided by default, and Phorge points out this omission prominently in its overview of *Setup Issues*: following these hints quickly leads to the place where a regular *Username/Password* provider can be added.

Alternatively, Phorge can delegate the responsibility of authentication to big corporations like Google and Facebook, but these can be easily ignored. Genuine self-hosting means to manage users directly, without outsourcing of authentication.

- A proper password for the administrator can now be set, e.g. by the following command:

```
isabelle phabricator bin/auth recover makarius
```

The printed URL gives access to a login and password dialog in the web interface.

Any further users will be able to provide a password directly, because the Auth Provider is already active.

- The list of Phorge **Setup Issues** should be studied with some care, to make sure that no serious problems are remaining. For example, the request to lock the configuration can be fulfilled as follows:

```
isabelle phabricator bin/auth lock
```

A few other Setup Issues might be relevant as well, e.g. the timezone of the server. Some more exotic points can be ignored: Phorge provides careful explanations about what it thinks could be wrong, while leaving some room for interpretation. It may also help to reboot the host machine, to make sure that all Webserver + PHP configuration is properly activated.

### 6.1.2 Mailer configuration

The next important thing is messaging: Phorge needs to be able to communicate with users on its own account, e.g. to reset passwords. The documentation has many variations on *Configuring Outbound Email*<sup>6</sup>, but a conventional SMTP server with a dedicated `phabricator` user is sufficient. There is no need to run a separate mail server on the self-hosted Linux machine: hosting providers often include such a service for free, e.g. as part of a web-hosting package. As a last resort it is also possible to use a corporate service like Gmail, but such dependency dilutes the whole effort of self-hosting.

Mailer configuration requires a few command-line invocations as follows:

```
isabelle phabricator_setup_mail
```

This generates a JSON template file for the mail account details. After editing that, the subsequent command will add and test it with Phorge:

```
isabelle phabricator_setup_mail -T makarius
```

This tells Phorge to send a message to the administrator created before; the output informs about success or errors.

The mail configuration process can be refined and repeated until it works properly: host name, port number, protocol etc. all need to be correct. The `key` field in the JSON file identifies the name of the configuration that will be overwritten each time, when taking over the parameters via `isabelle phabricator_setup_mail`.

The effective mail configuration can be queried like this:

```
isabelle phabricator bin/config get cluster.mailers
```

### 6.1.3 SSH configuration

SSH configuration is important to access hosted repositories with public-key authentication. It is done by a separate tool, because it affects the operating-system and all installations of Phorge simultaneously.

The subsequent configuration is convenient (and ambitious): it takes away the standard port 22 from the operating system and assigns it to Isabelle/Phorge.

---

<sup>6</sup>[https://we.phorge.it/book/phorge/article/configuring\\_outbound\\_email](https://we.phorge.it/book/phorge/article/configuring_outbound_email)

```
isabelle phabricator_setup_ssh -p 22 -q 222
```

Afterwards, remote login to the server host needs to use that alternative port 222. If there is a problem connecting again, the administrator can usually access a remote console via some web interface of the virtual server provider.

The following alternative is more modest: it uses port 2222 for Phorge, and retains port 22 for the operating system.

```
isabelle phabricator_setup_ssh -p 2222 -q 22
```

The tool can be invoked multiple times with different parameters; ports are changed back and forth each time and services restarted.

#### 6.1.4 Internet domain name and HTTPS configuration

So far the Phorge server has been accessible only on `localhost`. Proper configuration of a public Internet domain name (with HTTPS certificate from *Let's Encrypt*) works as follows.

- Register a subdomain (e.g. `vcs.example.org`) as an alias for the IP address of the underlying Linux host. This usually works by some web interface of the hosting provider to edit DNS entries; it might require some time for updated DNS records to become publicly available.
- Edit the Phorge website configuration file in `/etc/apache2/sites-available/` to specify `ServerName` and `ServerAdmin` like this:

```
ServerName vcs.example.org
ServerAdmin webmaster@example.org
```

Then reload (or restart) Apache like this:

```
systemctl reload apache2
```

- Install `certbot` from <https://certbot.eff.org> following the description for Apache and Ubuntu Linux. Run `certbot` interactively and let it operate on the domain `vcs.example.org`.
- Inform Phorge about its new domain name like this:

```
isabelle phabricator bin/config set \  
  phabricator.base-uri https://vcs.example.org
```

- Visit the website <https://vcs.example.org> and configure Phorge as described before. The following options are particularly relevant for a public website:
  - *Auth Provider / Username/Password*: disable *Allow Registration* to avoid uncontrolled registrants; users can still be invited via email instead.
  - Enable `policy.allow-public` to allow read-only access to resources, without requiring user registration.
- Adjust `phabricator.cookie-prefix` for multiple installations with overlapping domains (see also the documentation of this configuration option within Phorge).

## 6.2 Global data storage and backups

The global state of a Phorge installation consists of two main parts:

1. The *root directory* according to `/etc/isabelle-phabricator.conf` or `isabelle phabricator -l`: it contains the main PHP program suite with administrative tools, and some configuration files. The default setup also puts hosted repositories here (subdirectory `repo`).
2. Multiple *MySQL databases* with a common prefix derived from the installation name — the same name is used as database user name.

The root user may invoke `/usr/local/bin/isabelle-phabricator-dump` to create a complete database dump within the root directory. Afterwards it is sufficient to make a conventional **file-system backup** of everything. To restore the database state, see the explanations on `mysqldump` in [https://we.phorge.it/book/phorge/article/configuring\\_backups](https://we.phorge.it/book/phorge/article/configuring_backups); some background information is in [https://we.phorge.it/book/flavor/article/so\\_many\\_databases](https://we.phorge.it/book/flavor/article/so_many_databases).

The following command-line tools are particularly interesting for advanced database maintenance (within the Phorge root directory that is traditionally called `phabricator`):

```
phabricator/bin/storage help dump
phabricator/bin/storage help shell
phabricator/bin/storage help destroy
phabricator/bin/storage help renamespace
```

For example, copying a database snapshot from one installation to another works as follows. Run on the first installation root directory:

```
phabricator/bin/storage dump > dump1.sql
phabricator/bin/storage renamespace --from phabricator_vcs \
  --to phabricator_xyz --input dump1.sql --output dump2.sql
```

Then run on the second installation root directory:

```
phabricator/bin/storage destroy
phabricator/bin/storage shell < ../dump2.sql
```

Local configuration in `phabricator/config/local/` and hosted repositories need to be treated separately within the file-system. For the latter see also these tools:

```
phabricator/bin/repository help list-paths
phabricator/bin/repository help move-paths
```

## 6.3 Upgrading Phorge installations

The Phorge community publishes a new stable version several times per year: see also <https://we.phorge.it/w/changelog>. There is no need to follow updates on the spot, but it is a good idea to upgrade occasionally — with the usual care to avoid breaking a production system (see also §6.2 for database dump and backup).

The Isabelle/Phorge setup provides a convenience tool to upgrade all installations uniformly:

```
/usr/local/bin/isabelle-phabricator-upgrade
```

This refers to the `stable` branch of the distribution repositories by default. Alternatively, it is also possible to use the `master` like this:

```
/usr/local/bin/isabelle-phabricator-upgrade master
```

See <https://we.phorge.it/book/phorge/article/upgrading> for further explanations on Phorge upgrade.

## 6.4 Reference of command-line tools

The subsequent command-line tools usually require root user privileges on the underlying Linux system (e.g. via `sudo bash` to open a subshell, or directly via `sudo isabelle phabricator ...`).

### 6.4.1 isabelle phabricator

The `isabelle phabricator` tool invokes a GNU bash command-line within the Phorge home directory:

Usage: `isabelle phabricator [OPTIONS] COMMAND [ARGS...]`

Options are:

<code>-l</code>	list available Phorge installations
<code>-n NAME</code>	Phorge installation name (default: "vcs")

Invoke a command-line tool within the home directory of the named Phorge installation.

Isabelle/Phorge installations are registered in the global configuration file `/etc/isabelle-phabricator.conf`, with name and root directory separated by colon (no extra whitespace). The home directory is the subdirectory `phabricator` within the root.

Option `-l` lists the available Phorge installations with name and root directory — without invoking a command.

Option `-n` selects the explicitly named Phorge installation.

### Examples

Print the home directory of the Phorge installation:

```
isabelle phabricator pwd
```

Print some Phorge configuration information:

```
isabelle phabricator bin/config get phabricator.base-uri
```

The latter conforms to typical command templates seen in the original Phorge documentation:

```
phabricator/ $ ./bin/config get phabricator.base-uri
```

Here the user is meant to navigate to the Phorge home manually, in contrast to `isabelle phabricator` doing it automatically thanks to the global configuration `/etc/isabelle-phabricator.conf`.

### 6.4.2 isabelle phabricator\_setup

The `isabelle phabricator_setup` tool installs a fresh Phorge instance on Ubuntu 22.04 or 24.04 LTS:

Usage: `isabelle phabricator_setup [OPTIONS]`

Options are:

<code>-M SOURCE</code>	install Mercurial from source: local PATH, or URL, or ":"
<code>-R DIR</code>	repository directory (default: <code>"/var/www/phabricator-NAME/repo"</code> )
<code>-U</code>	full update of system packages before installation
<code>-n NAME</code>	Phorge installation name (default: <code>"vcs"</code> )
<code>-o OPTION</code>	override Isabelle system OPTION (via <code>NAME=VAL</code> or <code>NAME</code> )
<code>-r DIR</code>	installation root directory (default: <code>"/var/www/phabricator-NAME"</code> )

Install Phorge as LAMP application (Linux, Apache, MySQL, PHP).

The installation name (default: `"vcs"`) is mapped to a regular Unix user; this is relevant for public SSH access.

Installation requires Linux root permissions. All required packages are installed automatically beforehand, this includes the Apache web server and the MySQL database engine.

Global configuration in `/etc` or a few other directories like `/var/www` uses name prefixes like `isabelle-phabricator` or `phabricator`. Local configuration for a particular installation uses more specific names derived from `phabricator-NAME`, e.g. `/var/www/phabricator-vcs` for the default.

Knowing the naming conventions, it is possible to purge a Linux installation from Isabelle/Phorge with some effort, but there is no automated procedure for de-installation. In the worst case, it might be better to re-install the virtual machine from a clean image.

Option `-U` ensures a full update of system packages, before installing further packages required by Phorge. This might require a reboot.

Option `-M`: installs a standard Mercurial release from source: a specific version that is known to work on Ubuntu 22.04 or 24.04, respectively. It is also possible to specify the path or URL of the source archive (`.tar.gz`). This option is recommended for production use, but it requires to *uninstall* existing Mercurial packages provided by the operating system.

Option `-n` provides an alternative installation name. The default name `vcs` means “version control system”. The name appears in the URL for SSH access, and thus has some relevance to end-users. The initial server URL also uses the same suffix, but that can (and should) be changed later via regular Apache configuration.

Option `-o` augments the environment of Isabelle system options: relevant options for Isabelle/Phorge have the prefix “`phabricator_`” (see also the result of e.g. “`isabelle options -l`”).

Option `-r` specifies an alternative installation root directory: it needs to be accessible for the Apache web server.

Option `-R` specifies an alternative directory for repositories that are hosted by Phorge. Provided that it is accessible for the Apache web server, the directory can be reused for the `hgweb` view by Mercurial.<sup>7</sup>

### 6.4.3 `isabelle phabricator_setup_mail`

The `isabelle phabricator_setup_mail` tool provides mail configuration for an existing Phorge installation:

Usage: `isabelle phabricator_setup_mail [OPTIONS]`

Options are:

<code>-T USER</code>	send test mail to Phorge user
<code>-f FILE</code>	config file (default: “ <code>mailers.json</code> ” within Phorge root)
<code>-n NAME</code>	Phorge installation name (default: “ <code>vcs</code> ”)

Provide mail configuration for existing Phorge installation.

Proper mail configuration is vital for Phorge, but the details can be tricky. A common approach is to re-use an existing SMTP mail service, as is often included in regular web hosting packages. It is sufficient to create one mail account for multiple Phorge installations, but the configuration needs to be set for each installation.

The first invocation of `isabelle phabricator_setup_mail` without options creates a JSON template file. Its `key` entry should be changed to something sensible to identify the configuration, e.g. the Internet Domain Name of the mail address. The `options` specify the SMTP server address and account information.

Another invocation of `isabelle phabricator_setup_mail` with updated JSON file will change the underlying Phorge installation. This can be done repeatedly, until everything works as expected.

Option `-T` invokes a standard Phorge test procedure for the mail configuration. The argument needs to be a valid Phorge user: the mail address is derived from the user profile.

---

<sup>7</sup>See also the documentation <https://www.mercurial-scm.org/wiki/PublishingRepositories> and the example <https://isabelle.sketis.net/repos>.



Option `-f` refers to an existing JSON configuration file, e.g. from a previous successful Phorge installation: sharing mailers setup with the same mail address is fine for outgoing mails; incoming mails are optional and not configured here.

#### 6.4.4 `isabelle phabricator_setup_ssh`

The `isabelle phabricator_setup_ssh` tool configures a special SSH service for all Phorge installations:

Usage: `isabelle phabricator_setup_ssh [OPTIONS]`

Options are:

<code>-p PORT</code>	sshd port for Phorge servers (default: 2222)
<code>-q PORT</code>	sshd port for the operating system (default: 22)

Configure ssh service for all Phorge installations: a separate sshd is run in addition to the one of the operating system, and ports need to be distinct.

A particular Phorge installation is addressed by using its name as the ssh user; the actual Phorge user is determined via stored ssh keys.

This is optional, but very useful. It allows to refer to hosted repositories via ssh with the usual public-key authentication. It also allows to communicate with a Phorge server via the JSON API of *Conduit*<sup>8</sup>.

The Phorge SSH server distinguishes installations by their name, e.g. `vcs` as SSH user name. The public key that is used for authentication identifies the user within Phorge: there is a web interface to provide that as part of the user profile.

The operating system already has an SSH server (by default on port 22) that remains important for remote administration of the machine.

Options `-p` and `-q` allow to change the port assignment for both servers. A common scheme is `-p 22 -q 222` to leave the standard port to Phorge, to simplify the ssh URL that users will see for remote repository clones.<sup>9</sup>

Redirecting the operating system sshd to port 222 requires some care: it requires to adjust the remote login procedure, e.g. in `$HOME/.ssh/config` to add a `Port` specification for the server machine.

---

<sup>8</sup><https://we.phorge.it/book/phorge/article/conduit>

<sup>9</sup>For the rare case of hosting Subversion repositories, port 22 is de-facto required. Otherwise Phorge presents malformed `svn+ssh` URLs with port specification.

---

## Miscellaneous tools

---

Subsequently we describe various Isabelle related utilities, given in alphabetical order.

### 7.1 Building Isabelle docker images

Docker<sup>1</sup> provides a self-contained environment for complex applications called *container*, although it does not fully contain the program in a strict sense of the word. This includes basic operating system services (usually based on Linux), shared libraries and other required packages. Thus Docker is a light-weight alternative to regular virtual machines, or a heavy-weight alternative to conventional self-contained applications.

Although Isabelle can be easily run on a variety of OS environments without extra containment, Docker images may occasionally be useful when a standardized Linux environment is required, even on Windows<sup>2</sup> and macOS<sup>3</sup>. Further uses are in common cloud computing environments, where applications need to be submitted as Docker images in the first place.

The `isabelle docker_build` tool builds docker images from a standard Isabelle application archive for Linux:

Usage: `isabelle docker_build [OPTIONS] APP_ARCHIVE`

Options are:

<code>-B NAME</code>	base image (default "ubuntu:24.04")
<code>-E</code>	set Isabelle/bin/isabelle as entrypoint
<code>-P NAME</code>	additional Ubuntu package collection ("X11", "latex")
<code>-W DIR</code>	working directory that is accessible to docker, potentially via snap (default: ".")
<code>-l NAME</code>	default logic (default ISABELLE_LOGIC="HOL")
<code>-n</code>	no docker build

---

<sup>1</sup><https://docs.docker.com>

<sup>2</sup><https://docs.docker.com/docker-for-windows>

<sup>3</sup><https://docs.docker.com/docker-for-mac>

<code>-o FILE</code>	output generated Dockerfile
<code>-p NAME</code>	additional Ubuntu package
<code>-t TAG</code>	docker build tag
<code>-v</code>	verbose

Build Isabelle docker image with default logic image, using a standard Isabelle application archive for Linux (local file or remote URL).

Option `-E` sets `bin/isabelle` of the contained Isabelle distribution as the standard entry point of the Docker image. Thus `docker run` will imitate the `isabelle` command-line tool (§1.2) of a regular local installation, but it lacks proper GUI support: `isabelle jedit` will not work without further provisions. Note that the default entrypoint may be changed later via `docker run --entrypoint="..."`.

Option `-t` specifies the Docker image tag: this a symbolic name within the local Docker name space, but also relevant for Docker Hub<sup>4</sup>.

Option `-l` specifies the default logic image of the Isabelle distribution contained in the Docker environment: it will be produced by `isabelle build -b` as usual (§2.3) and stored within the image.

Option `-B` specifies the Docker image taken as starting point for the Isabelle installation: it needs to be a suitable version of Ubuntu Linux, see also [https://hub.docker.com/\\_/ubuntu](https://hub.docker.com/_/ubuntu). The default for Isabelle2025-2 is `ubuntu:24.04`, but `ubuntu:22.04` and `ubuntu:20.04` also work. Other versions might require experimentation with the package selection.

Option `-p` includes additional Ubuntu packages, using the terminology of `apt-get install` within the underlying Linux distribution.

Option `-P` refers to high-level package collections: `X11` or `latex` as provided by `isabelle docker_build` (assuming Ubuntu 24.04/22.04/20.04 LTS). This imposes extra weight on the resulting Docker images. Note that `X11` will only provide remote X11 support according to the modest GUI quality standards of the late 1990-ies.

Option `-n` suppresses the actual `docker build` process. Option `-o` outputs the generated `Dockerfile`. Both options together produce a Dockerfile only, which might be useful for informative purposes or other tools.

Option `-v` disables quiet-mode of the underlying `docker build` process.

Option `-W` specifies an alternative work directory: it needs to be accessible to docker, even if this is run via Snap (e.g. on Ubuntu 24.04). The default

---

<sup>4</sup><https://hub.docker.com>

“.” usually works, if this is owned by the user: the tool will create a fresh directory within it, and remove it afterwards.

### Examples

Produce a Dockerfile (without image) from a remote Isabelle distribution:

```
isabelle docker_build -E -n -o Dockerfile
https://isabelle.in.tum.de/website-Isabelle2025-2/dist/Isabelle2025-2_linux.tar.gz
```

Build a standard Isabelle Docker image from a local Isabelle distribution, with `bin/isabelle` as executable entry point:

```
isabelle docker_build -E -t test/isabelle:Isabelle2025-2 Isabelle2025-2_linux.tar.gz
```

Invoke the raw Isabelle/ML process within that image:

```
docker run test/isabelle:Isabelle2025-2 ML_process -e "Session.welcome
()"
```

Invoke a Linux command-line tool within the contained Isabelle system environment:

```
docker run test/isabelle:Isabelle2025-2 env uname -a
```

The latter should always report a Linux operating system, even when running on Windows or macOS.

## 7.2 Managing Isabelle components

The `isabelle components` tool manages Isabelle components:

Usage: `isabelle components [OPTIONS] [COMPONENTS ...]`

Options are:

<code>-I</code>	init user settings
<code>-R URL</code>	component repository (default <code>\$ISABELLE_COMPONENT_REPOSITORY</code> )
<code>-a</code>	resolve all missing components
<code>-l</code>	list status
<code>-u DIR</code>	update <code>\$ISABELLE_HOME_USER/components</code> : add directory
<code>-x DIR</code>	update <code>\$ISABELLE_HOME_USER/components</code> : remove directory

Resolve Isabelle components via download and installation: given `COMPONENTS` are identified via base name. Further operations manage etc/settings and

```
etc/components in $ISABELLE_HOME_USER.
```

```
ISABELLE_COMPONENT_REPOSITORY="..."  
ISABELLE_HOME_USER="..."
```

Components are initialized as described in §1.1.3 in a permissive manner, which can mark components as “missing”. This state is amended by letting `isabelle components` download and unpack components that are published on the default component repository <https://isabelle.in.tum.de/components> in particular.

Option `-R` specifies an alternative component repository. Note that `file:///` URLs can be used for local directories.

Option `-a` selects all missing components to be resolved. Explicit components may be named as command line-arguments as well. Note that components are uniquely identified by their base name, while the installation takes place in the location that was specified in the attempt to initialize the component before.

Option `-l` lists the current state of available and missing components with their location (full name) within the file-system.

Option `-I` initializes the user settings file to subscribe to the standard components specified in the Isabelle repository clone — this does not make any sense for regular Isabelle releases. An existing file that does not contain a suitable line “`init_components...components/main`” needs to be edited according to the printed explanation.

Options `-u` and `-x` operate on user components listed in `$ISABELLE_HOME_USER/etc/components`: this avoids manual editing of Isabelle configuration files.

## 7.3 Viewing documentation

The `isabelle doc` tool displays Isabelle documentation:

```
Usage: isabelle doc [DOC ...]
```

```
View Isabelle documentation.
```

If called without arguments, it lists all available documents. Each line starts with an identifier, followed by a short description. Any of these identifiers may be specified as arguments, in order to display the corresponding document.

The `ISABELLE_DOCS` setting specifies the list of directories (separated by colons) to be scanned for documentations.

## 7.4 Shell commands within the settings environment

The `isabelle env` tool is a direct wrapper for the standard `/usr/bin/env` command on POSIX systems, running within the Isabelle settings environment (§1.1).

The command-line arguments are that of the underlying version of `env`. For example, the following invokes an instance of the GNU Bash shell within the Isabelle environment:

```
isabelle env bash
```

## 7.5 Inspecting the settings environment

The Isabelle settings environment — as provided by the site-default and user-specific settings files — can be inspected with the `isabelle getenv` tool:

Usage: `isabelle getenv [OPTIONS] [VARNAMES ...]`

Options are:

- `-a` display complete environment
- `-b` print values only (doesn't work for `-a`)
- `-d FILE` dump complete environment to file (NUL terminated entries)

Get value of `VARNAMES` from the Isabelle settings.

With the `-a` option, one may inspect the full process environment that Isabelle related programs are run in. This usually contains much more variables than are actually Isabelle settings. Normally, output is a list of lines of the form *name=value*. The `-b` option causes only the values to be printed.

Option `-d` produces a dump of the complete environment to the specified file. Entries are terminated by the ASCII NUL character, i.e. the string terminator in C. Thus the Isabelle/Scala operation `isabelle.Isabelle_System.init` can import the settings environment robustly, and provide its own `isabelle.Isabelle_System.getenv` function.

## Examples

Get the location of `ISABELLE_HOME_USER` where user-specific information is stored:

```
isabelle getenv ISABELLE_HOME_USER
```

Get the value only of the same settings variable, which is particularly useful in shell scripts:

```
isabelle getenv -b ISABELLE_HOME_USER
```

## 7.6 Mercurial repository setup

The `isabelle hg_setup` tool simplifies the setup of Mercurial repositories, with hosting via Phabricator (chapter 6) or SSH file server access.

Usage: `isabelle hg_setup [OPTIONS] REMOTE LOCAL_DIR`

Options are:

<code>-n NAME</code>	remote repository name (default: base name of <code>LOCAL_DIR</code> )
<code>-p PATH</code>	Mercurial path name (default: "default")
<code>-r</code>	assume that remote repository already exists

Setup a remote vs. local Mercurial repository: `REMOTE` either refers to a Phabricator server "`user@host`" or SSH file server "`ssh://user@host/path`".

The `REMOTE` repository specification *excludes* the actual repository name: that is given by the base name of `LOCAL_DIR`, or via option `-n`.

By default, both sides of the repository are created on demand by default. In contrast, option `-r` assumes that the remote repository already exists: it avoids accidental creation of a persistent repository with unintended name.

The local `.hg/hgrc` file is changed to refer to the remote repository, usually via the symbolic path name "default"; option `-p` allows to provide a different name.

## Examples

Setup the current directory as a repository with Phabricator server hosting:

```
isabelle hg_setup vcs@vcs.example.org .
```

Setup the current directory as a repository with plain SSH server hosting:

```
isabelle hg_setup ssh://files.example.org/data/repositories .
```

Both variants require SSH access to the target server, via public key without password.

## 7.7 Mercurial repository synchronization

The `isabelle hg_sync` tool synchronizes a local Mercurial repository with a target directory.

Usage: `isabelle hg_sync [OPTIONS] TARGET`

Options are:

<code>-F RULE</code>	add rsync filter RULE (e.g. "protect /foo" to avoid deletion)
<code>-R ROOT</code>	explicit repository root directory (default: implicit from current directory)
<code>-T</code>	thorough treatment of file content and directory times
<code>-n</code>	no changes: dry-run
<code>-o OPTION</code>	override Isabelle system OPTION (via NAME=VAL or NAME)
<code>-p PORT</code>	explicit SSH port
<code>-r REV</code>	explicit revision (default: state of working directory)
<code>-s HOST</code>	SSH host name for remote target (default: local)
<code>-u USER</code>	explicit SSH user name
<code>-v</code>	verbose

Synchronize Mercurial repository with `TARGET` directory,  
which can be local or remote (see options `-s -p -u`).

The `TARGET` specifies a directory, which can be local or an a remote SSH host; the latter requires option `-s` for the host name. The content is written directly into the target, *without* creating a separate sub-directory. The special sub-directory `.hg_sync` within the target contains meta data from the original Mercurial repository. Repeated synchronization is guarded by the presence of a `.hg_sync` sub-directory: this sanity check prevents accidental changes (or deletion!) of targets that were not created by `isabelle hg_sync`.

Option `-r` specifies an explicit revision of the repository; the default is the current state of the working directory (which might be uncommitted).

Option `-v` enables verbose mode. Option `-n` enables “dry-run” mode: operations are only simulated; use it with option `-v` to actually see results.



Option **-F** adds a filter rule to the underlying **rsync** command; multiple **-F** options may be given to accumulate a list of rules.

Option **-R** specifies an explicit repository root directory. The default is to derive it from the current directory, searching upwards until a suitable **.hg** directory is found.

Option **-T** indicates thorough treatment of file content and directory times. The default is to consider files with equal time and size already as equal, and to ignore time stamps on directories.

Options **-s**, **-p**, **-u** specify the SSH connection precisely. If no SSH host name is given, the local file-system is used. An explicit port and user are only required in special situations.

Option **-p** specifies an explicit port for the SSH connection underlying **rsync**; the default is taken from the user's **ssh\_config** file.

## Examples

Synchronize the current repository onto a remote host, with accurate treatment of all content:

```
isabelle hg_sync -T -s remotename test/repos
```

## 7.8 Installing standalone Isabelle executables

By default, the main Isabelle binaries (**isabelle** etc.) are just run from their location within the distribution directory, probably indirectly by the shell through its **PATH**. Other schemes of installation are supported by the **isabelle install** tool:

Usage: **isabelle install** [OPTIONS] BINDIR

Options are:

**-d** DISTDIR    refer to DISTDIR as Isabelle distribution  
                 (default ISABELLE\_HOME)

Install Isabelle executables with absolute references to the distribution directory.

The `-d` option overrides the current Isabelle distribution directory as determined by `ISABELLE_HOME`.

The `BINDIR` argument tells where executable wrapper scripts for `isabelle` and `isabelle_java` should be placed, which is typically a directory in the shell's `PATH`, such as `$HOME/bin`.

It is also possible to make symbolic links of the main Isabelle executables manually, but making separate copies outside the Isabelle distribution directory will not work!

## 7.9 Creating instances of the Isabelle logo

The `isabelle logo` tool creates variants of the Isabelle logo, for inclusion in PDF<sub>La</sub>T<sub>E</sub>X documents.

Usage: `isabelle logo [OPTIONS] [NAME]`

Options are:

<code>-o FILE</code>	alternative output file
<code>-q</code>	quiet mode

Create variant `NAME` of the Isabelle logo as `"isabelle_name.pdf"`.

Option `-o` provides an alternative output file, instead of the default in the current directory: `isabelle_name.pdf` with the lower-case version of the given name.

Option `-q` omits printing of the resulting output file name.

Implementors of Isabelle tools and applications are encouraged to make derived Isabelle logos for their own projects using this template. The license is the same as for the regular Isabelle distribution (BSD).

## 7.10 Output the version identifier of the Isabelle distribution

The `isabelle version` tool displays Isabelle version information:

Usage: `isabelle version [OPTIONS]`

Options are:

```

-i          short identification (derived from Mercurial id)
-t          symbolic tags (derived from Mercurial id)

```

```

Display Isabelle version information.

```

The default is to output the Isabelle distribution name, e.g. “Isabelle2025-2”.

Option `-i` produces a short identification derived from the Mercurial id of the `ISABELLE_HOME` directory; option `-t` prints version tags (if available).

These options require either a repository clone or a repository archive (e.g. download of <https://isabelle.sketis.net/repos/isabelle/archive/tip.tar.gz>).

## 7.11 Managed installations of *Haskell* and *OCaml*

Code generated in Isabelle [1] for *SML* or *Scala* integrates easily using Isabelle/ML or Isabelle/Scala respectively.

To facilitate integration with further target languages, there are tools to provide managed installations of the required ecosystems:

- Tool `isabelle ghc_setup` provides a basic *Haskell* [3] environment consisting of the Glasgow Haskell Compiler and the Haskell Tool Stack.
- Tool `isabelle ghc_stack` provides an interface to that *Haskell* environment; use `isabelle ghc_stack --help` for elementary instructions.
- Tool `isabelle ocaml_setup` provides a basic *OCaml* [2] environment consisting of the OCaml compiler and the OCaml Package Manager.
- Tool `isabelle ocaml_opam` provides an interface to that *OCaml* environment; use `isabelle ocaml_opam --help` for elementary instructions.

---

# Bibliography

---

- [1] F. Haftmann. *Code generation from Isabelle/HOL theories*.  
<http://isabelle.in.tum.de/doc/codegen.pdf>.
- [2] X. Leroy et al. *The Objective Caml system – Documentation and user’s manual*. <http://caml.inria.fr/pub/docs/manual-ocaml/>.
- [3] S. Thompson. *Haskell: The Craft of Functional Programming*.  
Addison-Wesley, 1999.
- [4] M. Wenzel. *The Isabelle/Isar Implementation*.  
<https://isabelle.in.tum.de/doc/implementation.pdf>.
- [5] M. Wenzel. *The Isabelle/Isar Reference Manual*.  
<https://isabelle.in.tum.de/doc/isar-ref.pdf>.
- [6] M. Wenzel. *Isabelle/jEdit*. <https://isabelle.in.tum.de/doc/jedit.pdf>.

---

# Index

---

- bash (executable), **2**, **2**
- browser\_info (system option), **20**
- build (tool), **19**, **23**, **39**, **43**, **45**, **47**
- build\_log (tool), **28**
- build\_manager (tool), **38**, **39**
- build\_manager\_database (tool), **39**
- build\_task (tool), **39**
  
- chapter\_def (syntax), **14**
- chapter\_entry (syntax), **14**
- client (tool), **50**
- components (tool), **95**
- condition (system option), **21**
- console (tool), **4**, **9**
  
- doc (tool), **96**
- docker\_build (tool), **93**
- document (system option), **20**
- document (tool), **43**, **45**
- document\_bibliography (system option), **21**
- document\_build (system option), **46**
- document\_comment\_latex (system option), **21**
- document\_echo (system option), **20**
- document\_heading\_prefix (system option), **21**
- document\_output (system option), **20**
- document\_tags (system option), **21**
- document\_variants (system option), **20**
- dump (tool), **31**
  
- env (tool), **97**
- export (tool), **19**, **30**
  
- find\_facts\_index (tool), **47**
- find\_facts\_index\_build (tool), **47**
- find\_facts\_server (tool), **47**
  
- getenv (tool), **97**
- ghc\_setup (tool), **102**
- ghc\_stack (tool), **102**
  
- hg\_setup (tool), **98**
- hg\_sync (tool), **99**
  
- install (tool), **100**
- isabelle (executable), **1**, **6**
- ISABELLE\_APPLE\_PLAT-  
FORM64 (setting), **3**
- ISABELLE\_BIBTEX (setting), **4**,  
**46**
- ISABELLE\_BROWSER\_INFO  
(setting), **4**, **25**, **44**
- ISABELLE\_BROWSER\_INFO\_  
SYSTEM (setting), **4**, **25**
- ISABELLE\_BUILD\_OPTIONS  
(setting), **24**
- ISABELLE\_DOCS (setting), **4**
- ISABELLE\_HEAPS (setting), **4**
- ISABELLE\_HEAPS\_SYSTEM  
(setting), **4**
- ISABELLE\_HOME (setting), **1**, **3**
- ISABELLE\_HOME\_USER (set-  
ting), **3**
- ISABELLE\_IDENTIFIER (setting),  
**3**
- isabelle\_java (executable), **9**
- ISABELLE\_JAVA\_PLATFORM  
(setting), **4**

- ISABELLE\_JAVAC\_OPTIONS (setting), 74
- ISABELLE\_JDK\_HOME (setting), **4**
- ISABELLE\_LINE\_EDITOR (setting), **4**
- ISABELLE\_LOGIC (setting), **4**
- ISABELLE\_LUALATEX (setting), **4**, 46
- ISABELLE\_MAKEINDEX (setting), **4**, 46
- ISABELLE\_PDFLATEX (setting), **4**, 46
- ISABELLE\_PLATFORM64 (setting), **3**
- ISABELLE\_PLATFORM\_FAMILY (setting), **3**
- ISABELLE\_SCALAC\_OPTIONS (setting), 74
- ISABELLE\_TMP\_PREFIX (setting), **5**
- ISABELLE\_TOOL (setting), **2**
- ISABELLE\_TOOL\_JAVA\_OPTIONS (setting), **5**
- ISABELLE\_TOOLS (setting), **4**, **5**
- ISABELLE\_WINDOWS\_PLATFORM32 (setting), **3**
- ISABELLE\_WINDOWS\_PLATFORM64 (setting), **3**
- java (tool), **72**
- logo (tool), **101**
- mkroot (tool), 43, **44**
- ML\_process (tool), **7**
- ML\_system\_64 (system option), 4
- ocaml\_opam (tool), **102**
- ocaml\_setup (tool), **102**
- options (tool), **22**
- PDF\_VIEWER (setting), **4**
- phabricator (tool), **89**
- phabricator\_setup (tool), **90**
- phabricator\_setup\_mail (tool), **91**
- phabricator\_setup\_ssh (tool), **92**
- process\_theories (tool), **40**
- profiling (system option), **22**
- rlwrap (executable), **9**
- scala (antiquotation), **79**
- scala (ML antiquotation), **77**
- scala (tool), **72**
- scala\_build (tool), **75**
- scala\_function (ML antiquotation), **77**
- scala\_method (antiquotation), **79**
- scala\_object (antiquotation), **79**
- scala\_project (tool), **76**
- scala\_type (antiquotation), **79**
- scalac (tool), **73**
- server (tool), **49**
- session\_entry (syntax), **15**
- sessions (tool), **34**
- sync (tool), **35**
- system\_heaps (system option), **22**
- system\_log (system option), **22**
- threads (system option), **21**, 25
- timeout (system option), **21**
- timeout\_scale (system option), **21**
- update (tool), **32**
- update\_cite (system option), 33
- update\_control\_cartouches (system option), 33
- update\_inner\_syntax\_cartouches (system option), 33
- update\_path\_cartouches (system option), 33
- USER\_HOME (setting), **2**
- version (tool), **101**