

C and C++

1. Types — Variables — Expressions & Statements

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

1 / 23

Structure of this course

Programming in C:

- ▶ types, variables, expressions & statements
- ▶ functions, compilation, pre-processor
- ▶ pointers, structures
- ▶ extended examples, tick hints 'n' tips

Programming in C++:

- ▶ references, overloading, namespaces, C/C++ interaction
- ▶ operator overloading, streams, inheritance
- ▶ exceptions and templates
- ▶ standard template library

2 / 23

Text books

There are literally hundreds of books written about C and C++; five you might find useful include:

- ▶ Eckel, B. (2000). Thinking in C++, Volume 1: Introduction to Standard C++ (2nd edition). Prentice-Hall.
(<http://www.mindview.net/Books/TICPP/ThinkingInCPP2e.html>)
- ▶ Kernighan, B.W. & Ritchie, D.M. (1988). The C programming language (2nd edition). Prentice-Hall.
- ▶ Stroustrup, B. (2000). The C++ Programming Language Special Edition (3rd edition). Addison Wesley Longman
- ▶ Stroustrup, B. (1994). The design and evolution of C++. Addison-Wesley.
- ▶ Lippman, S.B. (1996). Inside the C++ object model. Addison-Wesley.

3 / 23

Past Exam Questions

- ▶ 1993 Paper 5 Question 5 1993 Paper 6 Question 5
- ▶ 1994 Paper 5 Question 5 1994 Paper 6 Question 5
- ▶ 1995 Paper 5 Question 5 1995 Paper 6 Question 5
- ▶ 1996 Paper 5 Question 5 (except part (f) `setjmp`)
- ▶ 1996 Paper 6 Question 5
- ▶ 1997 Paper 5 Question 5 1997 Paper 6 Question 5
- ▶ 1998 Paper 6 Question 6 *
- ▶ 1999 Paper 5 Question 5 * (first two sections only)
- ▶ 2000 Paper 5 Question 5 *
- ▶ 2006 Paper 3 Question 4 *
- ▶ 2007 Paper 3 Question 4 2007 Paper 11 Question 3
- ▶ 2008 Paper 3 Question 3 2008 Paper 10 Question 4
- ▶ 2009 Paper 3 Question 1

* denotes CPL questions relevant to this course.

4 / 23

Context: from BCPL to Java

- ▶ 1966 Martin Richards developed BCPL
- ▶ 1969 Ken Thompson designed B
- ▶ 1972 Dennis Ritchie's C
- ▶ 1979 Bjarne Stroustrup created C with Classes
- ▶ 1983 C with Classes becomes C++
- ▶ 1989 Original C90 ANSI C standard (ISO adoption 1990)
- ▶ 1990 James Gosling started Java (initially called Oak)
- ▶ 1998 ISO C++ standard
- ▶ 1999 C99 standard (ISO adoption 1999, ANSI, 2000)
- ▶ 201? C++0x - the next ISO C++ standard

5 / 23

C is a "low-level" language

- ▶ C uses low-level features: characters, numbers & addresses
- ▶ Operators work on these fundamental types
- ▶ No C operators work on "composite types"
e.g. strings, arrays, sets
- ▶ Only static definition and stack-based local variables
heap-based storage is implemented as a library
- ▶ There are no `read` and `write` primitives
instead, these are implemented by library routines
- ▶ There is only a single control-flow
no threads, synchronisation or coroutines

6 / 23

Classic first example

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     printf("Hello, world\n");
6     return 0;
7 }
```

Compile with:
`$ cc example1.c`

Execute program with:
`$./a.out`
Hello, world
`$`

7 / 23

Basic types

- ▶ C has a small and limited set of basic types:

type	description (size)
char	characters (≥ 8 bits)
int	integer values (≥ 16 bits, commonly one word)
float	single-precision floating point number
double	double-precision floating point number

- ▶ Precise size of types is architecture dependent
- ▶ Various type operators for altering type meaning, including: `unsigned`, `long`, `short`, `const`, `static`
- ▶ This means we can have types such as `long int` and `unsigned char`

8 / 23

Constants

- ▶ Numeric constants can be written in a number of ways:

type	style	example
char	none	none
int	number, character or escape seq.	12 'A' '\n' '\007'
long int	number w/suffix <code>l</code> or <code>L</code>	1234L
float	number with '.', 'e' or 'E' and suffix <code>f</code> or <code>F</code>	1.234e3F or 1234.0f
double	number with '.', 'e' or 'E'	1.234e3 1234.0
long double	number '.', 'e' or 'E' and suffix <code>l</code> or <code>L</code>	1.234E3l or 1234.0L

- ▶ Numbers can be expressed in octal by prefixing with a '0' and hexadecimal with '0x'; for example: `52=064=0x34`

9 / 23

Defining constant values

- ▶ An enumeration can be used to specify a set of constants; e.g.:
`enum boolean {FALSE, TRUE};`
- ▶ By default enumerations allocate successive integer values from zero
- ▶ It is possible to assign values to constants; for example:
`enum months {JAN=1,FEB,MAR};`
`enum boolean {F,T,FALSE=0,TRUE,N=0,Y};`
- ▶ Names for constants in different `enums` must be distinct; values in the same `enum` need not
- ▶ The preprocessor can also be used (more on this later)

10 / 23

Variables

- ▶ Variables must be defined (i.e. storage set aside) exactly once
- ▶ A variable name can be composed of letters, digits and underscore (`_`); a name must begin with a letter or underscore
- ▶ Variables are defined by prefixing a name with a type, and can optionally be initialised; for example: `long int i = 28L;`
- ▶ Multiple variables of the same basic type can be defined together; for example: `char c,d,e;`

11 / 23

Operators

- ▶ All operators (including assignment) return a result
- ▶ Most operators are similar to those found in Java:

type	operators
arithmetic	<code>+ - * / ++ -- %</code>
logic	<code>== != > >= < <= && !</code>
bitwise	<code> & << >> ~ ^</code>
assignment	<code>= += -= *= /= %= <<= >>= &= = ^=</code>
other	<code>sizeof</code>

12 / 23

Type conversion

- ▶ Automatic type conversion may occur when two operands to a binary operator are of a different type
- ▶ Generally, conversion “widens” a variable (e.g. `short` → `int`)
- ▶ However “narrowing” is possible and may not generate a compiler warning; for example:

```
1 int i = 1234;  
2 char c;  
3 c = i+1; /* i overflows c */
```

- ▶ Type conversion can be forced by using a cast, which is written as: (type) exp; for example: `c = (char) 1234L`;

13 / 23

Expressions and statements

- ▶ An expression is created when one or more operators are combined; for example `x *= y % z`
- ▶ Every expression (even assignment) has a type and a result
- ▶ Operator precedence provides an unambiguous interpretation for every expression
- ▶ An expression (e.g. `x=0`) becomes a statement when followed by a semicolon (i.e. `x=0;`)
- ▶ Several expressions can be separated using a comma `,`; expressions are then evaluated left to right; for example: `x=0,y=1.0`
- ▶ The type and value of a comma-separated expression is the type and value of the result of the right-most expression

14 / 23

Blocks or compound statements

- ▶ A block or compound statement is formed when multiple statements are surrounded with braces `{ }`
- ▶ A block of statements is then equivalent to a single statement
- ▶ In ANSI/ISO C90, variables can only be declared or defined at the start of a block (this restriction was lifted in ANSI/ISO C99)
- ▶ Blocks are typically associated with a function definition or a control flow statement, but can be used anywhere

15 / 23

Variable scope

- ▶ Variables can be defined outside any function, in which case they:
 - ▶ are often called global or static variables
 - ▶ have global scope and can be used anywhere in the program
 - ▶ consume storage for the entire run-time of the program
 - ▶ are initialised to zero by default
- ▶ Variables defined within a block (e.g. function):
 - ▶ are often called local or automatic variables
 - ▶ can only be accessed from definition until the end of the block
 - ▶ are only allocated storage for the duration of block execution
 - ▶ are only initialised if given a value; otherwise their value is undefined

16 / 23

Variable definition versus declaration

- ▶ A variable can be declared but not defined using the `extern` keyword; for example `extern int a`;
- ▶ The declaration tells the compiler that storage has been allocated elsewhere (usually in another source file)
- ▶ If a variable is declared and used in a program, but not defined, this will result in a link error (more on this later)

17 / 23

Scope and type example

```
1 #include <stdio.h>  
2  
3 int a; /*what value does a have? */  
4 unsigned char b = 'A';  
5 extern int alpha; /* safe to use this? */  
6  
7 int main(void) {  
8     extern unsigned char b; /* is this needed? */  
9     double a = 3.4;  
10    {  
11        extern a; /*why is this sloppy? */  
12        printf("%d %d\n",b,a+1); /*what will this print? */  
13    }  
14  
15    return 0;  
16 }
```

18 / 23

Arrays and strings

- ▶ One or more items of the same type can be grouped into an array; for example: `long int i[10];`
- ▶ The compiler will allocate a contiguous block of memory for the relevant number of values
- ▶ Array items are indexed from zero, and there is no bounds checking
- ▶ Strings in C are usually represented as an array of `chars`, terminated with a special character `'\0'`
- ▶ There is compiler support for string constants using the `"` character; for example:
`char str[]="two strs mer" "ged and terminated"`
- ▶ String support is available in the `string.h` library

19 / 23

Control flow

- ▶ Control flow is similar to Java:
 - ▶ `exp ? exp : exp`
 - ▶ `if (exp) stmt1 else stmt2`
 - ▶ `switch(exp) {`
 - `case exp1:`
 - `stmt1`
 - ...
 - `default:`
 - `stmtn+1`
 - ▶ `while (exp) stmt`
 - ▶ `for (exp1; exp2; exp3) stmt`
 - ▶ `do stmt while (exp);`
- ▶ The jump statements `break` and `continue` also exist

20 / 23

Control flow and string example

```
1 #include <stdio.h>
2 #include <string.h>
3
4 char s[]="University of Cambridge Computer Laboratory";
5
6 int main(void) {
7
8     char c;
9     int i, j;
10    for (i=0,j=strlen(s)-1;i<j;i++,j--) /* strlen(s)-1 ? */
11        c=s[i], s[i]=s[j], s[j]=c;
12
13    printf("%s\n",s);
14    return 0;
15 }
```

21 / 23

Goto (considered harmful)

- ▶ The `goto` statement is never required
- ▶ It often results in code which is hard to understand and maintain
- ▶ Exception handling (where you wish to exit or `break` from two or more loops) may be one case where a `goto` is justified:

```
1 for (...) {
2     for (...) {
3         ...
4         if (critical_problem)
5             goto error;
6     }
7 }
8 ...
9 error:
fix problem, or abort
```

22 / 23

Exercises

1. What is the difference between `'a'` and `"a"`?
2. Will `char i,j; for(i=0;i<10,j<5;i++,j++) ;` terminate? If so, under what circumstances?
3. Write an implementation of bubble sort for a fixed array of integers. (An array of integers can be defined as `int i[] = {1,2,3,4}`; the 2nd integer in an array can be printed using `printf("%d\n",i[1]);`.)
4. Modify your answer to (3) to sort characters into lexicographical order. (The 2nd character in a character array `i` can be printed using `printf("%c\n",i[1]);`.)

23 / 23

C and C++

2. Functions — Preprocessor

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

1 / 18

Functions

- ▶ C does not have objects, but does have function support
- ▶ A function definition has a return type, parameter specification, and a body or statement; for example:

```
int power(int base, int n) { stmt }
```
- ▶ A function declaration has a return type and parameter specification followed by a semicolon; for example:

```
int power(int base, int n);
```

 - ▶ The use of the `extern` keyword for function declarations is optional
- ▶ All arguments to a function are copied, i.e. passed-by-value; modification of the local value does not affect the original
- ▶ Just as for variables, a function must have exactly one definition and can have multiple declarations
- ▶ A function which is used but only has a declaration, and no definition, results in a link error (more on this later)
- ▶ Functions cannot be nested

2 / 18

Function type-system nasties

- ▶ A function definition with no values (e.g. `power()`) is not an empty parameter specification, rather it means that its arguments should not be type-checked! (this is not the case in C++)
- ▶ Instead, a function with no arguments is declared using `void`
- ▶ An ellipsis (`...`) can be used for partial parameter specification, for example:

```
int printf(char* fmt,...) { stmt }
```
- ▶ The ellipsis is useful for defining functions with variable length arguments, but leaves a hole in the type system (`stdarg.h`)
- ▶ In comparison, C++ uses operator overloading to provide better I/O type safety (more on this later)

3 / 18

Recursion

- ▶ Functions can call themselves recursively
- ▶ On each call, a new set of local variables are created
- ▶ Therefore, a function recursion of depth n has n sets of variables
- ▶ Recursion can be useful when dealing with recursively defined data structures, like trees (more on such data structures later)
- ▶ Recursion can also be used as you would in ML:

```
1
2 unsigned int fact(unsigned int n) {
3     return n ? n*fact(n-1) : 1;
4 }
```

4 / 18

Compilation

- ▶ A compiler transforms a C source file or execution unit into an object file
- ▶ An object file consists of machine code, and a list of:
 - ▶ defined or exported symbols representing defined function names and global variables
 - ▶ undefined or imported symbols for functions and global variables which are declared but not defined
- ▶ A linker combines several object files into an executable by:
 - ▶ combining all object code into a single file
 - ▶ adjusting the absolute addresses from each object file
 - ▶ resolving all undefined symbols

The Part 1B Compiler Course describes how to build a compiler and linker in more detail

5 / 18

Handling code in multiple files in C

- ▶ C separates declaration from definition for both variables and functions
- ▶ This allows portions of code to be split across multiple files
- ▶ Code in different files can then be compiled at different times
 - ▶ This allows libraries to be compiled once, but used many times
 - ▶ It also allows companies to sell binary-only libraries
- ▶ In order to use code written in another file we still need a declaration
- ▶ A header file can be used to:
 - ▶ supply the declarations of function and variable definitions in another file
 - ▶ provide preprocessor macros (more on this later)
 - ▶ avoid duplication (and `..` errors) that would otherwise occur
- ▶ You might find the Unix tool `nm` useful for inspecting symbol tables

6 / 18

Multi-source file example

Header File — example4.h

```
1 /*reverse a string in place */
2 void reverse(char str[]);
```

Source File — example4a.c

```
1 #include <string.h>
2 #include "example4.h"
3
4 /*reverse a string in place */
5 void reverse(char s[]) {
6     int c, i, j;
7     for (i=0,j=strlen(s)-1;
8         i<j;i++,j--)
9         c=s[i], s[i]=s[j], s[j]=c;
10 }
```

Source File — example4b.c

```
1 #include <stdio.h>
2 #include "example4.h"
3
4
5 int main(void) {
6     char s[] = "Reverse me";
7     reverse(s);
8     printf("%s\n",s);
9     return 0;
10 }
```

7 / 18

Variable and function scope with static

- ▶ The `static` keyword limits the scope of a variable or function
- ▶ In the global scope, `static` does not export the function or variable symbol
 - ▶ This prevents the variable or function from being called externally
- ▶ In the local scope, a `static` variable retains its value between function calls
 - ▶ A single static variable exists even if a function call is recursive

8 / 18

C Preprocessor

- ▶ The preprocessor is executed before any compilation takes place
- ▶ It manipulates the textual content of the source file in a single pass
- ▶ Amongst other things, the preprocessor:
 - ▶ deletes each occurrence of a backslash followed by a newline;
 - ▶ replaces comments by a single space;
 - ▶ replaces definitions, obeys conditional preprocessing directives and expands macros; and
 - ▶ it replaces escaped sequences in character constants and string literals and concatenates adjacent string literals

9 / 18

Controlling the preprocessor programmatically

- ▶ The preprocessor can be used by the programmer to rewrite source code
- ▶ This is a powerful (and, at times, useful) feature, but can be hard to debug (more on this later)
- ▶ The preprocessor interprets lines starting with `#` with a special meaning
- ▶ Two text substitution directives: `#include` and `#define`
- ▶ Conditional directives: `#if`, `#elif`, `#else` and `#endif`

10 / 18

The `#include` directive

- ▶ The `#include` directive performs text substitution
- ▶ It is written in one of two forms:

```
#include "filename"    #include <filename>
```
- ▶ Both forms replace the `#include ...` line in the source file with the contents of `filename`
- ▶ The quote ("`"`) form searches for the file in the same location as the source file, then searches a predefined set of directories
- ▶ The angle ("`<`") form searches a predefined set of directories
- ▶ When a `#included` file is changed, all source files which depend on it should be recompiled

11 / 18

The `#define` directive

- ▶ The `#define` directive has the form:

```
#define name replacement text
```
- ▶ The directive performs a direct text substitution of all future examples of `name` with the `replacement text` for the remainder of the source file
- ▶ The `name` has the same constraints as a standard C variable name
- ▶ Replacement does not take place if `name` is found inside a quoted string
- ▶ By convention, `name` tends to be written in upper case to distinguish it from a normal variable name

12 / 18

Defining macros

- ▶ The `#define` directive can be used to define macros as well; for example:

```
#define MAX(A,B) ((A)>(B)?(A):(B))
```
- ▶ In the body of the macro:
 - ▶ prefixing a parameter in the replacement text with `'#'` places the parameter value inside string quotes ("`"`)
 - ▶ placing `'##'` between two parameters in the replacement text removes any whitespace between the variables in generated output
- ▶ Remember: the preprocessor only performs text substitution
 - ▶ This means that syntax analysis and type checking doesn't occur until the compilation stage
 - ▶ This can, initially at least, generate some confusing compiler warnings on line numbers where the macro is used, rather than when it is defined; for example:

```
#define JOIN(A,B) (A ## B))
```

13 / 18

Example

```
1 #include <stdio.h>
2
3 #define PI 3.141592654
4 #define MAX(A,B) ((A)>(B)?(A):(B))
5 #define PERCENT(D) (100*D) /* Wrong? */
6 #define DPRINT(D) printf("#D " = "%g\n",D)
7 #define JOIN(A,B) (A ## B)
8
9 int main(void) {
10     const unsigned int a1=3;
11     const unsigned int i = JOIN(a,1);
12     printf("%u %g\n",i, MAX(PI,3.14));
13     DPRINT(MAX(PERCENT(0.32+0.16),PERCENT(0.15+0.48)));
14
15     return 0;
16 }
```

14 / 18

Conditional preprocessor directives

Conditional directives: `#if`, `#ifdef`, `#ifndef`, `#elif` and `#endif`

- ▶ The preprocessor can use conditional statements to include or exclude code in later phases of compilation
- ▶ `#if` accepts a (somewhat limited) integer expression as an argument and only retains the code between `#if` and `#endif` (or `#elif`) if the expression evaluates to a non-zero value; for example:
`#if SOME_DEF > 8 && OTHER_DEF != THIRD_DEF`
- ▶ The built-in preprocessor function `defined` accepts a name as its sole argument and returns 1L if the name has been `#defined`; 0L otherwise
- ▶ `#ifdef N` and `#ifndef N` are equivalent to `#if defined(N)` and `#if !defined(N)` respectively
- ▶ `#undef` can be used to remove a `#defined` name from the preprocessor macro and variable namespace.

15 / 18

Example

Conditional directives have several uses, including preventing double definitions in header files and enabling code to function on several different architectures; for example:

```
1 #if SYSTEM_SYSV
2 #define HDR "sysv.h"
3 #elif SYSTEM_BSD
4 #define HDR "bsd.h"
5 #else
6 #define HDR "default.h"
7 #endif
8 #include HDR
9
10 #ifndef MYHEADER_H
11 #define MYHEADER_H 1
12 ...
13 /* declarations & defs */
14 ...
15 #endif /* !MYHEADER_H */
```

16 / 18

Error control

- ▶ To help other compilers which generate C code (rather than machine code) as output, compiler line and filename warnings can be overridden with:
`#line constant "filename"`
- ▶ The compiler then adjusts its internal value for the next line in the source file as `constant` and the current name of the file being processed as `filename` ("`filename`" may be omitted)
- ▶ The statement `"#error some text"` causes the preprocessor to write a diagnostic message containing `some text`
- ▶ There are several predefined identifiers that produce special information: `__LINE__`, `__FILE__`, `__DATE__`, and `__TIME__`.

17 / 18

Exercises

1. Write a function definition which matches the declaration `int cntlower(char str[]);`. The implementation should return the number of lower-case letters in a string
2. Use function recursion to write an implementation of merge sort for a fixed array of integers; how much memory does your program use for a list of length n ?
3. Define a macro `SWAP(t,x,y)` that exchanges two arguments of type `t` (K&R, Exercise 4-14)
4. Define a macro `SWAP(x,y)` that exchanges two arguments of the same type (e.g. `int` or `char`) without using a temporary

18 / 18

C and C++

3. Pointers — Structures

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010


1 / 25

Pointers

- ▶ Computer memory is often abstracted as a sequence of bytes, grouped into words
- ▶ Each byte has a unique address or index into this sequence
- ▶ The size of a word (and byte!) determines the size of addressable memory in the machine
- ▶ A pointer in C is a variable which contains the memory address of another variable (this can, itself, be a pointer)
- ▶ Pointers are declared or defined using an asterisk(*); for example: `char *pc`; or `int **ppi`;
- ▶ The asterisk binds to the variable name, not the type definition; for example `char *pc,c`;
- ▶ A pointer does not necessarily take the same amount of storage space as the type it points to

2 / 25

Example

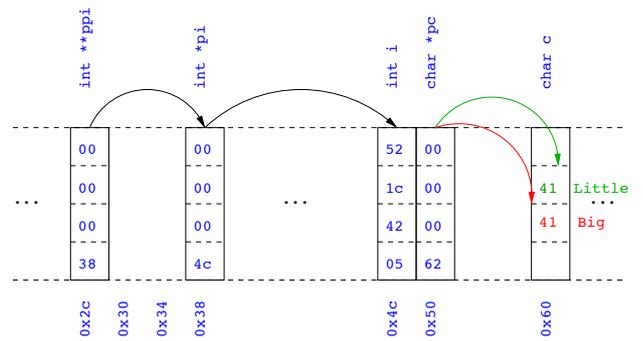

3 / 25

Manipulating pointers

- ▶ The value "pointed to" by a pointer can be "retrieved" or dereferenced by using the unary * operator; for example:
`int *p = ...`
`int x = *p;`
- ▶ The memory address of a variable is returned with the unary ampersand (&) operator; for example
`int *p = &x;`
- ▶ Dereferenced pointer values can be used in normal expressions; for example: `*pi += 5`; or `(*pi)++`

4 / 25

Example

```
1 #include <stdio.h>
2
3 int main(void) {
4     int x=1,y=2;
5     int *pi;
6     int **ppi;
7
8     pi = &x; ppi = &pi;
9     printf("%p, %p, %d=%d=%d\n", ppi, pi, x, *pi, **ppi);
10    pi = &y;
11    printf("%p, %p, %d=%d=%d\n", ppi, pi, y, *pi, **ppi);
12
13    return 0;
14 }
```

5 / 25

Pointers and arrays

- ▶ A C array uses consecutive memory addresses without padding to store data
- ▶ An array name (without an index) represents the memory address of the beginning of the array; for example:
`char c[10];`
`char *pc = c;`
- ▶ Pointers can be used to "index" into any element of an array; for example:
`int i[10];`
`int *pi = &i[5];`

6 / 25

Pointer arithmetic

- ▶ Pointer arithmetic can be used to adjust where a pointer points; for example, if `pc` points to the first element of an array, after executing `pc+=3`; then `pc` points to the fourth element
- ▶ A pointer can even be dereferenced using array notation; for example `pc[2]` represents the value of the array element which is two elements beyond the array element currently pointed to by `pc`
- ▶ In summary, for an array `c`, `*(c+i)≡c[i]` and `c+i≡&c[i]`
- ▶ A pointer is a variable, but an array name is not; therefore `pc=c` and `pc++` are valid, but `c=pc` and `c++` are not

7 / 25

Example

```
1 #include <stdio.h>
2
3 int main(void) {
4     char str[] = "A string.";
5     char *pc = str;
6
7     printf("%c %c %c\n",str[0],*pc,pc[3]);
8     pc += 2;
9     printf("%c %c %c\n",*pc, pc[2], pc[5]);
10
11     return 0;
12 }
```

8 / 25

Pointers as function arguments

- ▶ Recall that all arguments to a function are copied, i.e. passed-by-value; modification of the local value does not affect the original
- ▶ In the second lecture we defined functions which took an array as an argument; for example `void reverse(char s[])`
- ▶ Why, then, does `reverse` affect the values of the array after the function returns (i.e. the array values haven't been copied)?
 - ▶ because `s` is a pointer to the start of the array
- ▶ Pointers of any type can be passed as parameters and return types of functions
- ▶ Pointers allow a function to alter parameters passed to it

9 / 25

Example

- ▶ Compare `swp1(a,b)` with `swp2(&a,&b)`:

```
1 void swp1(int x,int y)          1 void swp2(int *px,int *py)
2 {                                2 {
3     int temp = x;                3     int temp = *px;
4     x = y;                        4     *px = *py;
5     y = temp;                    5     *py = temp;
6 }                                6 }
```


10 / 25

Arrays of pointers

- ▶ C allows the creation of arrays of pointers; for example `int *a[5]`;
- ▶ Arrays of pointers are particularly useful with strings
- ▶ An example is C support of command line arguments:
`int main(int argc, char *argv[]) { ... }`
- ▶ In this case `argv` is an array of character pointers, and `argc` tells the programmer the length of the array

11 / 25

Example

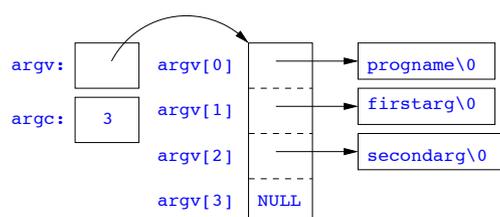

12 / 25

Multi-dimensional arrays

- ▶ Multi-dimensional arrays can be declared in C; for example:
`int i[5][10]`;
- ▶ Values of the array can be accessed using square brackets; for example: `i[3][2]`
- ▶ When passing a two dimensional array to a function, the first dimension is not needed; for example, the following are equivalent:
`void f(int i[5][10]) { ... }`
`void f(int i[][10]) { ... }`
`void f(int (*i)[10]) { ... }`
- ▶ In arrays with higher dimensionality, all but the first dimension must be specified

13 / 25

Pointers to functions

- ▶ C allows the programmer to use pointers to functions
- ▶ This allows functions to be passed as arguments to functions
- ▶ For example, we may wish to parameterise a sort algorithm on different comparison operators (e.g. lexicographically or numerically)
- ▶ If the sort routine accepts a pointer to a function, the sort routine can call this function when deciding how to order values

14 / 25

Example

```
1 void sort(int a[], const int len,
2         int (*compare)(int, int))
3 {
4     int i, j, tmp;
5     for(i=0; i<len-1; i++)
6         for(j=0; j<len-1-i; j++)
7             if ((*compare)(a[j], a[j+1]))
8                 tmp=a[j], a[j]=a[j+1], a[j+1]=tmp;
9 }
10
11 int inc(int a, int b) {
12     return a > b ? 1 : 0;
13 }
```

15 / 25

Example

```
1 #include <stdio.h>
2 #include "example8.h"
3
4 int main(void) {
5     int a[] = {1,4,3,2,5};
6     unsigned int len = 5;
7     sort(a, len, inc); //or sort(a, len, &inc);
8
9     int *pa = a; //C99
10    printf("(");
11    while (len--)
12        printf("%d%s", *pa++, len?" ":"");
13    printf(")\n");
14
15    return 0;
16 }
```

16 / 25

The void * pointer

- ▶ C has a "typeless" or "generic" pointer: `void *`
- ▶ This can be a pointer to anything
- ▶ This can be useful when dealing with dynamic memory
- ▶ Enables "polymorphic" code; for example:

```
1 sort(void *p, const unsigned int len,
2     int (*comp)(void *, void *));
```
- ▶ However this is also a big "hole" in the type system
- ▶ Therefore `void *` pointers should only be used where necessary

17 / 25

Structure declaration

- ▶ A structure is a collection of one or more variables
- ▶ It provides a simple method of abstraction and grouping
- ▶ A structure may itself contain structures
- ▶ A structure can be assigned to, as well as passed to, and returned from functions
- ▶ We declare a structure using the keyword `struct`
- ▶ For example, to declare a structure `circle` we write `struct circle {int x; int y; unsigned int r;};`
- ▶ Once declared, a structure creates a new type

18 / 25

Structure definition

- ▶ To define an instance of the structure `circle` we write `struct circle c;`
- ▶ A structure can also be initialised with values:

```
struct circle c = {12, 23, 5};
```
- ▶ An automatic, or local, structure variable can be initialised by function call:

```
struct circle c = circle_init();
```
- ▶ A structure can be declared, and several instances defined in one go:

```
struct circle {int x; int y; unsigned int r;} a, b;
```

19 / 25

Member access

- ▶ A structure member can be accessed using '.' notation: `structname.member`; for example: `pt.x`
- ▶ Comparison (e.g. `pt1 > pt2`) is undefined
- ▶ Pointers to structures may be defined; for example:
`struct circle *pc`
- ▶ When using a pointer to a struct, member access can be achieved with the '.' operator, but can look clumsy; for example: `(*pc).x`
- ▶ Alternatively, the '->' operator can be used; for example: `pc->x`

20 / 25

Self-referential structures

- ▶ A structure declaration can contain a member which is a pointer whose type is the structure declaration itself
- ▶ This means we can build recursive data structures; for example:

```
1 struct tree {
2   int val;
3   struct tree *left;
4   struct tree *right;
5 }
1 struct link {
2   int val;
3   struct link *next;
4 }
```

21 / 25

Unions

- ▶ A union variable is a single variable which can hold one of a number of different types
- ▶ A union variable is declared using a notation similar to structures; for example: `union u { int i; float f; char c;};`
- ▶ The size of a union variable is the size of its largest member
- ▶ The type held can change during program execution
- ▶ The type retrieved must be the type most recently stored
- ▶ Member access to unions is the same as for structures ('.' and '->')
- ▶ Unions can be nested inside structures, and vice versa

22 / 25

Bit fields

- ▶ Bit fields allow low-level access to individual bits of a word
- ▶ Useful when memory is limited, or to interact with hardware
- ▶ A bit field is specified inside a struct by appending a declaration with a colon (:) and number of bits; for example:
`struct fields { int f1 : 2; int f2 : 3;};`
- ▶ Members are accessed in the same way as for structs and unions
- ▶ A bit field member does not have an address (no & operator)
- ▶ Lots of details about bit fields are implementation specific:
 - ▶ word boundary overlap & alignment, assignment direction, etc.

23 / 25

Example (adapted from K&R)

```
1 struct { /* a compiler symbol table */
2   char *name;
3   struct {
4     unsigned int is_keyword : 1;
5     unsigned int is_extern : 1;
6     unsigned int is_static : 1;
7     ...
8   } flags;
9   int utype;
10  union {
11    int ival; /* accessed as symtab[i].u.ival */
12    float fval;
13    char *sval;
14  } u;
15 } symtab[NSYM];
```

24 / 25

Exercises

1. If `p` is a pointer, what does `p[-2]` mean? When is this legal?
2. Write a string search function with a declaration of `char *strfind(const char *s, const char *f)`; which returns a pointer to first occurrence of `s` in `f` (and `NULL` otherwise)
3. If `p` is a pointer to a structure, write some C code which uses all the following code snippets: `++p->i`, `p+++>i`, `*p->i`, `*p->i++`, `(*p->i)++` and `*p++->i`; describe the action of each code snippet
4. Write a program `calc` which evaluates a reverse Polish expression given on the command line; for example
`$ calc 2 3 4 + *`
should print 14 (K&R Exercise 5-10)

25 / 25

C and C++

4. Misc. — Library Features — Gotchas — Hints 'n' Tips


Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

1 / 24

Example

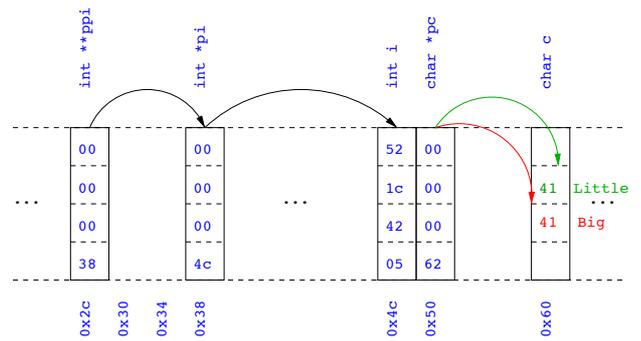

2 / 24

Uses of const and volatile

- ▶ Any declaration can be prefixed with `const` or `volatile`
- ▶ A `const` variable can only be assigned a value when it is defined
- ▶ The `const` declaration can also be used for parameters in a function definition
- ▶ The `volatile` keyword can be used to state that a variable may be changed by hardware, the kernel, another thread etc.
 - ▶ For example, the `volatile` keyword may prevent unsafe compiler optimisations for memory-mapped input/output
- ▶ The use of pointers and the `const` keyword is quite subtle:
 - ▶ `const int *p` is a pointer to a `const int`
 - ▶ `int const *p` is also a pointer to a `const int`
 - ▶ `int *const p` is a `const` pointer to an `int`
 - ▶ `const int *const p` is a `const` pointer to a `const int`

3 / 24

Example

```
1 int main(void) {
2   int i = 42;
3   int j = 28;
4
5   const int *pc = &i;           //Also: "int const *pc"
6   *pc = 41;                    //Wrong
7   pc = &j;
8
9   int *const cp = &i;
10  *cp = 41;
11  cp = &j;                       //Wrong
12
13  const int *const cpc = &i;
14  *cpc = 41;                    //Wrong
15  cpc = &j;                      //Wrong
16  return 0;
17 }
```

4 / 24

Typedefs

- ▶ The `typedef` operator, creates new data type names; for example, `typedef unsigned int Radius;`
- ▶ Once a new data type has been created, it can be used in place of the usual type name in declarations and casts; for example, `Radius r = 5; ...; r = (Radius) rshort;`
- ▶ A `typedef` declaration does not create a new type
 - ▶ It just creates a synonym for an existing type
- ▶ A `typedef` is particularly useful with structures and unions:

```
1 typedef struct llist *llptr;
2 typedef struct llist {
3   int val;
4   llptr next;
5 } linklist;
```

5 / 24

In-line functions

- ▶ A function in C can be declared `inline`; for example:

```
1 inline fact(unsigned int n) {
2   return n ? n*fact(n-1) : 1;
3 }
```

- ▶ The compiler will then try to “in-line” the function
 - ▶ A clever compiler might generate 120 for `fact(5)`
- ▶ A compiler might not always be able to “in-line” a function
- ▶ An `inline` function must be defined in the same execution unit as it is used
- ▶ The `inline` operator does not change function semantics
 - ▶ the in-line function itself still has a unique address
 - ▶ static variables of an in-line function still have a unique address

6 / 24

That's it!

- ▶ We have now explored most of the C language
- ▶ The language is quite subtle in places; in particular watch out for:
 - ▶ operator precedence
 - ▶ pointer assignment (particularly function pointers)
 - ▶ implicit casts between `ints` of different sizes and `chars`
- ▶ There is also extensive standard library support, including:
 - ▶ shell and file I/O (`stdio.h`)
 - ▶ dynamic memory allocation (`stdlib.h`)
 - ▶ string manipulation (`string.h`)
 - ▶ character class tests (`ctype.h`)
 - ▶ ...
 - ▶ (Read, for example, K&R Appendix B for a quick introduction)
 - ▶ (Or type "man *function*" at a Unix shell for details)

7 / 24

```
1 #include<stdio.h>
2 #define BUFSIZE 1024
3
4 int main(void) {
5     FILE *fp;
6     char buffer[BUFSIZE];
7
8     if ((fp=fopen("somefile.txt","rb")) == 0) {
9         perror("fopen error:");
10        return 1;
11    }
12
13    while(!feof(fp)) {
14        int r = fread(buffer,sizeof(char),BUFSIZE,fp);
15        fwrite(buffer,sizeof(char),r,stdout);
16    }
17
18    fclose(fp);
19    return 0;
20 }
```

9 / 24

Gotchas: operator precedence

```
1 #include<stdio.h>
2
3 struct test {int i;};
4 typedef struct test test_t;
5
6 int main(void) {
7     test_t a,b;
8     test_t *p[] = {&a,&b};
9     p[0]->i=0;
10    p[1]->i=0;
11    test_t *q = p[0];
12
13
14    printf("%d\n",++q->i); //What does this do?
15
16    return 0;
17 }
```

11 / 24

Library support: I/O

I/O is not managed directly by the compiler; support in `stdio.h`:

- ▶ `int printf(const char *format, ...);`
- ▶ `int sprintf(char *str, const char *format, ...);`
- ▶ `int scanf(const char *format, ...);`

- ▶ `FILE *fopen(const char *path, const char *mode);`
- ▶ `int fclose(FILE *fp);`
- ▶ `size_t fread(void *ptr, size_t size, size_t nmemb, FILE *stream);`
- ▶ `size_t fwrite(const void *ptr, size_t size, size_t nmemb, FILE *stream);`
- ▶ `int fprintf(FILE *stream, const char *format, ...);`
- ▶ `int fscanf(FILE *stream, const char *format, ...);`

8 / 24

Library support: dynamic memory allocation

- ▶ Dynamic memory allocation is not managed directly by the C compiler
- ▶ Support is available in `stdlib.h`:
 - ▶ `void *malloc(size_t size)`
 - ▶ `void *calloc(size_t nobj, size_t size)`
 - ▶ `void *realloc(void *p, size_t size)`
 - ▶ `void free(void *p)`
- ▶ The C `sizeof` unary operator is handy when using `malloc`:
`p = (char *) malloc(sizeof(char)*1000)`
- ▶ Any successfully allocated memory must be deallocated manually
 - ▶ Note: `free()` needs the pointer to the allocated memory
- ▶ Failure to deallocate will result in a memory leak

10 / 24

Gotchas: `i++`

```
1 #include <stdio.h>
2
3 int main(void) {
4
5     int i=2;
6     int j=i++ + ++i;
7     printf("%d %d\n",i,j); //What does this print?
8
9     return 0;
10 }
```

12 / 24

Gotchas: local stack

```
1 #include <stdio.h>
2
3 char *unary(unsigned short s) {
4     char local[s+1];
5     int i;
6     for (i=0;i<s;i++) local[i]='1';
7     local[s]='\0';
8     return local;
9 }
10
11 int main(void) {
12
13     printf("%s\n",unary(6)); //What does this print?
14
15     return 0;
16 }
```

13 / 24

Gotchas: local stack (contd.)

```
1 #include <stdio.h>
2
3 char global[10];
4
5 char *unary(unsigned short s) {
6     char local[s+1];
7     char *p = s%2 ? global : local;
8     int i;
9     for (i=0;i<s;i++) p[i]='1';
10    p[s]='\0';
11    return p;
12 }
13
14 int main(void) {
15     printf("%s\n",unary(6)); //What does this print?
16     return 0;
17 }
```

14 / 24

Gotchas: careful with pointers

```
1 #include <stdio.h>
2
3 struct values { int a; int b; };
4
5 int main(void) {
6     struct values test2 = {2,3};
7     struct values test1 = {0,1};
8
9     int *pi = &(test1.a);
10    pi += 1; //Is this sensible?
11    printf("%d\n",*pi);
12    pi += 2; //What could this point at?
13    printf("%d\n",*pi);
14
15    return 0;
16 }
```

15 / 24

Gotchas: XKCD pointers



16 / 24

Tricks: Duff's device

```
1 send(int *to, int *from, int count)
2 {
3     int n=(count+7)/8;
4     switch(count%8){
5     case 0: do{ *to = *from++;
6     case 7:     *to = *from++;
7     case 6:     *to = *from++;
8     case 5:     *to = *from++;
9     case 4:     *to = *from++;
10    case 3:     *to = *from++;
11    case 2:     *to = *from++;
12    case 1:     *to = *from++;
13                } while(--n>0);
14    }
15 }
```

17 / 24

Assessed exercise

- ▶ To be completed by midday on 15th January 2010
- ▶ Sign-up sheet removed midday on 15th January 2010
- ▶ Viva examinations 1300-1600 on 28th January 2010
- ▶ Viva examinations 1300-1600 on 29th January 2010
- ▶ Download the starter pack from:
<http://www.cl.cam.ac.uk/Teaching/current/CandC++/>
- ▶ This should contain eight files:
server.c rfc0791.txt message1 message3
client.c rfc0793.txt message2 message4

18 / 24

Exercise aims

Demonstrate an ability to:

- ▶ Understand (simple) networking code
- ▶ Use control flow, functions, structures and pointers
- ▶ Use libraries, including reading and writing files
- ▶ Understand a specification
- ▶ Compile and test code

Task is split into three parts:

- ▶ Comprehension and debugging
- ▶ Preliminary analysis
- ▶ Completed code and testing

19 / 24

Exercise submission

- ▶ Assessment is in the form of a 'tick'
- ▶ There will be a short viva; remember to sign up!
- ▶ Submission is via email to c-tick@cl.cam.ac.uk
- ▶ Your submission should include seven files, packed in to a ZIP file called `crsid.zip` and attached to your submission email:

```
answers.txt  client1.c  summary.c  message1.txt
server1.c   extract.c  message2.jpg
```

20 / 24

Hints: IP header

```

      0              1              2              3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
|Version| IHL |Type of Service|      Total Length      |
+-----+-----+-----+-----+
|      Identification      |Flags|      Fragment Offset |
+-----+-----+-----+-----+
| Time to Live | Protocol |      Header Checksum      |
+-----+-----+-----+-----+
|                               Source Address          |
+-----+-----+-----+-----+
|                               Destination Address     |
+-----+-----+-----+-----+
|                               Options                  |
|                               | Padding                |
+-----+-----+-----+-----+
```

21 / 24

Hints: IP header (in C)

```
1 #include <stdint.h>
2
3 struct ip {
4     uint8_t hlenver;
5     uint8_t tos;
6     uint16_t len;
7     uint16_t id;
8     uint16_t off;
9     uint8_t ttl;
10    uint8_t p;
11    uint16_t sum;
12    uint32_t src;
13    uint32_t dst;
14 };
15
16 #define IP_HLEN(lenver) (lenver & 0x0f)
17 #define IP_VER(lenver) (lenver >> 4)
```

22 / 24

Hints: network byte order

- ▶ The IP network is big-endian; x86 is little-endian
- ▶ Reading multi-byte values requires conversion
- ▶ The BSD API specifies:
 - ▶ `uint16_t ntohs(uint16_t netshort)`
 - ▶ `uint32_t ntohl(uint32_t netlong)`
 - ▶ `uint16_t htons(uint16_t hostshort)`
 - ▶ `uint32_t htonl(uint32_t hostlong)`

23 / 24

Exercises

1. What is the value of `i` after executing each of the following:
 - 1.1 `i = sizeof(char);`
 - 1.2 `i = sizeof(int);`
 - 1.3 `int a; i = sizeof a;`
 - 1.4 `char b[5]; i = sizeof(b);`
 - 1.5 `char *c=b; i = sizeof(c);`
 - 1.6 `struct {int d;char e;} s; i = sizeof s;`
 - 1.7 `void f(int j[5]) { i = sizeof j;}`
 - 1.8 `void f(int j[][10]) { i = sizeof j;}`
2. Use `struct` to define a data structure suitable for representing a binary tree of integers. Write a function `heapify()`, which takes a pointer to an integer array of values and a pointer to the head of an (empty) tree and builds a binary heap of the integer array values. (Hint: you'll need to use `malloc()`)
3. What other C data structure can be used to represent a heap? Would using this structure lead to a more efficient implementation of `heapify()`?

24 / 24

C++

C and C++

5. Overloading — Namespaces — Classes

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

To quote Bjarne Stroustrup:

“C++ is a general-purpose programming language with a bias towards systems programming that:

- ▶ is a better C
- ▶ supports data abstraction
- ▶ supports object-oriented programming
- ▶ supports generic programming.”

1 / 22

2 / 22

C++ fundamental types

- ▶ C++ has all the fundamental types C has
 - ▶ character literals (e.g. 'a') are now of type `char`
- ▶ In addition, C++ defines a new fundamental type, `bool`
- ▶ A `bool` has two values: `true` and `false`
- ▶ When cast to an integer, `true`→1 and `false`→0
- ▶ When casting from an integer, non-zero values become `true` and `false` otherwise

3 / 22

C++ enumeration

- ▶ Unlike C, C++ enumerations define a new type; for example
`enum flag {is_keyword=1, is_static=2, is_extern=4, ... }`
- ▶ When defining storage for an instance of an enumeration, you use its name; for example: `flag f = is_keyword`
- ▶ Implicit type conversion is not allowed:
`f = 5; //wrong` `f = flag(5); //right`
- ▶ The maximum valid value of an enumeration is the enumeration's largest value rounded up to the nearest larger binary power minus one
- ▶ The minimum valid value of an enumeration with no negative values is zero
- ▶ The minimum valid value of an enumeration with negative values is the nearest least negative binary power

4 / 22

References

- ▶ C++ supports references, which provide an alternative name for a variable
- ▶ Generally used for specifying parameters to functions and return values as well as overloaded operators (more later)
- ▶ A reference is declared with the `&` operator; for example:
`int i[] = {1,2}; int &refi = i[0];`
- ▶ A reference must be initialised when it is defined
- ▶ A variable referred to by a reference cannot be changed after it is initialised; for example:
`refi++; //increments value referenced`

5 / 22

References in function arguments

- ▶ When used as a function parameter, a referenced value is not copied; for example:
`void inc(int& i) { i++;} //bad style?`
- ▶ Declare a reference as `const` when no modification takes place
- ▶ It can be noticeably more efficient to pass a large struct by reference
- ▶ Implicit type conversion into a temporary takes place for a `const` reference but results in an error otherwise; for example:

```
1 float fun1(float&);
2 float fun2(const float&);
3 void test() {
4     double v=3.141592654;
5     fun1(v); //Wrong
6     fun2(v);
7 }
```

6 / 22

Overloaded functions

- ▶ Functions doing different things should have different names
- ▶ It is possible (and sometimes sensible!) to define two functions with the same name
- ▶ Functions sharing a name must differ in argument types
- ▶ Type conversion is used to find the "best" match
- ▶ A best match may not always be possible:

```
1 void f(double);
2 void f(long);
3 void test() {
4     f(1L); //f(long)
5     f(1.0); //f(double)
6     f(1); //Wrong: f(long(1)) or f(double(1)) ?
```

7 / 22

Scoping and overloading

- ▶ Functions in different scopes are not overloaded; for example:

```
1 void f(int);
2
3 void example() {
4     void f(double);
5     f(1); //calls f(double);
6 }
```

8 / 22

Default function arguments

- ▶ A function can have default arguments; for example:
`double log(double v, double base=10.0);`
- ▶ A non-default argument cannot come after a default; for example:
`double log(double base=10.0, double v); //wrong`
- ▶ A declaration does not need to name the variable; for example:
`double log(double v, double=10.0);`
- ▶ Be careful of the interaction between * and =; for example:
`void f(char*=0); //Wrong '==' is assignment`

9 / 22

Namespaces

Related data can be grouped together in a namespace:

```
namespace Stack { //header file
void push(char);
char pop();
}

namespace Stack { //implementation
const int max_size = 100;
char s[max_size];
int top = 0;

void push(char c) { ... }
char pop() { ... }
}
```

```
void f() { //usage
...
Stack::push('c');
...
}
```

10 / 22

Using namespaces

- ▶ A namespace is a scope and expresses logical program structure
- ▶ It provides a way of collecting together related pieces of code
- ▶ A namespace without a name limits the scope of variables, functions and classes within it to the local execution unit
- ▶ The same namespace can be declared in several source files
- ▶ The global function `main()` cannot be inside a namespace
- ▶ The use of a variable or function name from a different namespace must be qualified with the appropriate namespace(s)
 - ▶ The keyword `using` allows this qualification to be stated once, thereby shortening names
 - ▶ Can also be used to generate a hybrid namespace
 - ▶ `typedef` can be used: `typedef Some::Thing thing;`
- ▶ A namespace can be defined more than once
 - ▶ Allows, for example, internal and external library definitions

11 / 22

Example

```
1 namespace Module1 {int x;}
2
3 namespace Module2 {
4     inline int sqr(const int& i) {return i*i;}
5     inline int halve(const int& i) {return i/2;}
6 }
7
8 using namespace Module1; //"import" everything
9
10 int main() {
11     using Module2::halve; //"import" the halve function
12     x = halve(x);
13     sqr(x); //Wrong
14 }
```

12 / 22

Linking C and C++ code

- ▶ The directive `extern "C"` specifies that the following declaration or definition should be linked as C, not C++ code:
`extern "C" int f();`
- ▶ Multiple declarations and definitions can be grouped in curly brackets:

```
1 extern "C" {
2   int globalvar; //definition
3   int f();
4   void g(int);
5 }
```

13 / 22

Linking C and C++ code

- ▶ Care must be taken with pointers to functions and linkage:

```
1 extern "C" void qsort(void* p, \
2                   size_t nmem, size_t size, \
3                   int (*compar)(const void*, const void*));
4
5 int compare(const void*,const void*);
6
7 char s[] = "some chars";
8 qsort(s,9,1,compare); //Wrong
```

14 / 22

User-defined types

- ▶ C++ provides a means of defining classes and instantiating objects
- ▶ Classes contain both data storage and functions which operate on storage
- ▶ Classes have access control:
`private`, `protected` and `public`
- ▶ Classes are created with `class` or `struct` keywords
 - ▶ `struct` members default to `public` access; `class` to `private`
- ▶ A member function with the same name as a class is called a constructor
- ▶ A member function with the same name as the class, prefixed with a tilde (`~`), is called a destructor
- ▶ A constructor can be overloaded to provide multiple instantiation methods
- ▶ Can create `static` (i.e. per class) member variables

15 / 22

Example

```
1 class Complex {
2   double re,im;
3   public:
4   Complex(double r=0.0L, double i=0.0L);
5 };
6
7 Complex::Complex(double r,double i) {
8   re=r,im=i;
9 }
10
11 int main() {
12   Complex c(2.0), d(), e(1,5.0L);
13   return 0;
14 }
```

16 / 22

Constructors and destructors

- ▶ A default constructor is a function with no arguments (or only default arguments)
- ▶ If no constructor is specified, the compiler will generate one
- ▶ The programmer can specify one or more constructors
- ▶ Only one constructor is called when an object is created
- ▶ There can only be one destructor
 - ▶ This is called when a stack allocated object goes out of scope or when a heap allocated object is deallocated with `delete`; this also occurs for stack allocated objects during exception handling (more later)

17 / 22

Copy constructor

- ▶ A new class instance can be defined by assignment; for example:
`Complex c(1,2);`
`Complex d = c;`
- ▶ In this case, the new class is initialised with copies of all the existing class' non-static member variables; no constructor is called
- ▶ This behaviour may not always be desirable (e.g. consider a class with a pointer as a member variable)
 - ▶ In which case, define an alternative copy constructor:
`Complex::Complex(const Complex&) { ... }`
- ▶ If a copy constructor is not appropriate, make the copy constructor a private member function

18 / 22

Assignment operator

- ▶ By default a class is copied on assignment by over-writing all non-static member variables; for example:

```
1 Complex c(), d(1.0,2.3);
2 c = d; //assignment
```

- ▶ This behaviour may also not be desirable
- ▶ The assignment operator (`operator=`) can be defined explicitly:

```
1 Complex& Complex::operator=(const Complex& c) {
2     ...
3 }
```

19 / 22

Constant member functions

- ▶ Member functions can be declared `const`
- ▶ Prevents object members being modified by the function:

```
1 double Complex::real() const {
2     return re;
3 }
```

20 / 22

Arrays and the free store

- ▶ An array of class objects can be defined if a class has a default constructor
- ▶ C++ has a `new` operator to place items on the heap:
`Complex* c = new Complex(3.4);`
- ▶ Items on the heap exist until they are explicitly deleted:
`delete c;`
- ▶ Since C++ (like C) doesn't distinguish between a pointer to an object and a pointer to an array of objects, array deletion is different:

```
1 Complex* c = new Complex[5];
2     ...
3 delete[] c; //Cannot use "delete" here
```
- ▶ When an object is deleted, the object destructor is invoked

21 / 22

Exercises

1. Write an implementation of a class `LinkedList` which stores zero or more positive integers internally as a linked list on the heap. The class should provide appropriate constructors and destructors and a method `pop()` to remove items from the head of the list. The method `pop()` should return -1 if there are no remaining items. Your implementation should override the copy constructor and assignment operator to copy the linked-list structure between class instances. You might like to test your implementation with the following:

```
1 int main() {
2     int test[] = {1,2,3,4,5};
3     LinkedList l1(test+1,4), l2(test,5);
4     LinkedList l3=l2, l4;
5     l4=l1;
6     printf("%d %d %d\n",l1.pop(),l3.pop(),l4.pop());
7     return 0;
8 }
```

Hint: heap allocation & deallocation should occur exactly once!

22 / 22

C and C++

6. Operators — Inheritance — Virtual

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

From last lecture ...

```
1 class Complex {
2     double re,im;
3     public:
4     Complex(double r=0.0L, double i=0.0L);
5 };
6
7 Complex::Complex(double r,double i) {
8     re=r,im=i;
9 }
10
11 int main() {
12     Complex c(2.0), d(), e(1,5.0L);
13     return 0;
14 }
```

1 / 20

2 / 20

Operators

- ▶ C++ allows the programmer to overload the built-in operators
- ▶ For example, a new test for equality:

```
1 bool operator==(Complex a, Complex b) {
2     return a.real()==b.real()
3         && a.imag()==b.imag();
4 }
```

- ▶ An operator can be defined or declared within the body of a class, and in this case one fewer argument is required; for example:

```
1 bool Complex::operator==(Complex b) {
2     return re==b.real() && im==b.imag();
3 }
```

- ▶ Almost all operators can be overloaded

3 / 20

Streams

- ▶ Overloaded operators also work with built-in types
- ▶ Overloading is used to define a C++ "printf"; for example:

```
1 #include <iostream>
2
3 int main() {
4     const char* s = "char array";
5
6     std::cout << s << std::endl;
7
8     //Unexpected output; prints &s[0]
9     std::cout.operator<<(s).operator<<(std::endl);
10
11    //Expected output; prints s
12    std::operator<<(std::cout,s);
13    std::cout.operator<<(std::endl);
14    return 0;
15 }
```

4 / 20

The 'this' pointer

- ▶ If an operator is defined in the body of a class, it may need to return a reference to the current object
 - ▶ The keyword `this` can be used

- ▶ For example:

```
1 Complex& Complex::operator+=(Complex b) {
2     re += b.real();
3     this->im += b.imag();
4     return *this;
5 }
```

5 / 20

Class instances as member variables

- ▶ A class can have an instance of another class as a member variable
- ▶ How can we pass arguments to the class constructor?
- ▶ New notation for a constructor:

```
1 class X {
2     Complex c;
3     Complex d;
4     X(double a, double b): c(a,b), d(b) {
5         ...
6     }
7 };
```

- ▶ This notation must be used to initialise const and reference members
- ▶ It can also be more efficient

6 / 20

Temporary objects

- ▶ Temporary objects are often created during execution
- ▶ A temporary which is not bound to a reference or named object exists only during evaluation of a full expression
- ▶ Example: the `string` class has a function `c_str()` which returns a pointer to a C representation of a string:

```
1 string a("A "), b("string");
2 const char *s1 = a.c_str(); //Okay
3 const char *s2 = (a+b).c_str(); //Wrong
4 ...
5 //s still in scope here, but the temporary holding
6 //"a+b" has been deallocated
7 ...
8 string tmp = a+b;
9 const char *s3 = tmp.c_str(); //Okay
```

7 / 20

Friends

- ▶ A (non-member) `friend` function can access the private members of a class instance it befriends
- ▶ This can be done by placing the function declaration inside the class definition and prefixing it with the keyword `friend`; for example:

```
1 class Matrix {
2     ...
3     friend Vector operator*(const Matrix&, \
4                             const Vector&);
5     ...
6 };
7 }
```

8 / 20

Inheritance

- ▶ C++ allows a class to inherit features of another:

```
1 class vehicle {
2     int wheels;
3 public:
4     vehicle(int w=4):wheels(w) {}
5 };
6
7 class bicycle : public vehicle {
8     bool panniers;
9 public:
10    bicycle(bool p):vehicle(2),panniers(p) {}
11 };
12
13 int main() {
14     bicycle(false);
15 }
```

9 / 20

Derived member function call

- ▶ Default derived member function call semantics differ from Java:

```
1 class vehicle {
2     int wheels;
3 public:
4     vehicle(int w=4):wheels(w) {}
5     int maxSpeed() {return 60;}
6 };
7
8 class bicycle : public vehicle {
9     int panniers;
10 public:
11    bicycle(bool p=true):vehicle(2),panniers(p) {}
12    int maxSpeed() {return panniers ? 12 : 15;}
13 };
```

10 / 20

Example

```
1 #include <iostream>
2 #include "example13.hh"
3
4 void print_speed(vehicle &v, bicycle &b) {
5     std::cout << v.maxSpeed() << " ";
6     std::cout << b.maxSpeed() << std::endl;
7 }
8
9 int main() {
10    bicycle b = bicycle(true);
11    print_speed(b,b); //prints "60 12"
12 }
```

11 / 20

Virtual functions

- ▶ Non-virtual member functions are called depending on the static type of the variable, pointer or reference
- ▶ Since a derived class can be cast to a base class, this prevents a derived class from overloading a function
- ▶ To get polymorphic behaviour, declare the function virtual in the superclass:

```
1 class vehicle {
2     int wheels;
3 public:
4     vehicle(int w=4):wheels(w) {}
5     virtual int maxSpeed() {return 60;}
6 };
```

12 / 20

Virtual functions

- ▶ In general, for a virtual function, selecting the right function has to be run-time decision; for example:

```
1 bicycle b(true);
2 vehicle v;
3 vehicle* pv;
4
5 user_input() ? pv = &b : pv = &v;
6
7 std::cout << pv->maxSpeed() << std::endl;
8 }
```

13 / 20

Enabling virtual functions

- ▶ To enable virtual functions, the compiler generates a virtual function table or vtable
- ▶ A vtable contains a pointer to the correct function for each object instance
- ▶ The vtable is an example of indirection
- ▶ The vtable introduces run-time overhead

14 / 20

Abstract classes

- ▶ Sometimes a base class is an un-implementable concept
- ▶ In this case we can create an abstract class:

```
1 class shape {
2 public:
3     virtual void draw() = 0;
4 }
```
- ▶ It is not possible to instantiate an abstract class:

```
shape s; //Wrong
```
- ▶ A derived class can provide an implementation for some (or all) the abstract functions
- ▶ A derived class with no abstract functions can be instantiated

15 / 20

Example

```
1 class shape {
2 public:
3     virtual void draw() = 0;
4 };
5
6 class circle : public shape {
7 public:
8     //...
9     void draw() { /* impl */ }
10 };
```

16 / 20

Multiple inheritance

- ▶ It is possible to inherit from multiple base classes; for example:

```
1 class ShapelyVehicle: public vehicle, public shape {
2     ...
3 }
```
- ▶ Members from both base classes exist in the derived class
- ▶ If there is a name clash, explicit naming is required
- ▶ This is done by specifying the class name; for example:

```
ShapelyVehicle sv;
sv.vehicle::maxSpeed();
```

17 / 20

Multiple instances of a base class

- ▶ With multiple inheritance, we can build:

```
1 class A {};
2 class B : public A {};
3 class C : public A {};
4 class D : public B, public C {};
```
- ▶ This means we have two instances of A even though we only have a single instance of D
- ▶ This is legal C++, but means all references to A must be stated explicitly:

```
1 D d;
2 d.B::var=3;
3 d.C::var=4;
```

18 / 20

Virtual base classes

- ▶ Alternatively, we can have a single instance of the base class
- ▶ Such a “virtual” base class is shared amongst all those deriving from it

```
1 class Vehicle {int VIN;};
2 class Boat : public virtual Vehicle { ... };
3 class Car : public virtual Vehicle { ... };
4 class JamesBondCar : public Boat, public Car { ... };
```

19 / 20

Exercises

1. If a function `f` has a static instance of a class as a local variable, when might the class constructor be called?
2. Write a class `Matrix` which allows a programmer to define two dimensional matrices. Overload the common operators (e.g. `+`, `-`, `*`, and `/`)
3. Write a class `Vector` which allows a programmer to define a vector of length two. Modify your `Matrix` and `Vector` classes so that they interoperate correctly (e.g. `v2 = m*v1` should work as expected)
4. Why should destructors in an abstract class almost always be declared `virtual`?

20 / 20

Exceptions

C and C++

7. Exceptions — Templates

Andrew W. Moore

University of Cambridge
(with thanks to Alastair R. Beresford and Bjarne Stroustrup)

Michaelmas Term 2010

- ▶ Some code (e.g. a library module) may detect an error but not know what to do about it; other code (e.g. a user module) may know how to handle it
- ▶ C++ provides exceptions to allow an error to be communicated
- ▶ In C++ terminology, one portion of code throws an exception; another portion catches it.
- ▶ If an exception is thrown, the call stack is unwound until a function is found which catches the exception
- ▶ If an exception is not caught, the program terminates

1 / 20

2 / 20

Throwing exceptions

- ▶ Exceptions in C++ are just normal values, matched by type
- ▶ A class is often used to define a particular error type:
`class MyError {};`
- ▶ An instance of this can then be thrown, caught and possibly re-thrown:

```
1 void f() { ... throw MyError(); ... }
2 ...
3 try {
4   f();
5 }
6 catch (MyError) {
7   //handle error
8   throw; //re-throw error
9 }
```

3 / 20

Conveying information

- ▶ The "thrown" type can carry information:

```
1 struct MyError {
2   int errorcode;
3   MyError(i):errorcode(i) {}
4 };
5
6 void f() { ... throw MyError(5); ... }
7
8 try {
9   f();
10 }
11 catch (MyError x) {
12   //handle error (x.errorcode has the value 5)
13   ...
14 }
```

4 / 20

Handling multiple errors

- ▶ Multiple catch blocks can be used to catch different errors:

```
1 try {
2   ...
3 }
4 catch (MyError x) {
5   //handle MyError
6 }
7 catch (YourError x) {
8   //handle YourError
9 }
```

- ▶ Every exception will be caught with `catch(...)`
- ▶ Class hierarchies can be used to express exceptions:

```
1 #include <iostream>
2
3 struct SomeError {virtual void print() = 0;};
4 struct ThisError : public SomeError {
5   virtual void print() {
6     std::cout << "This Error" << std::endl;
7   }
8 };
9 struct ThatError : public SomeError {
10  virtual void print() {
11    std::cout << "That Error" << std::endl;
12  }
13 };
14 int main() {
15   try { throw ThisError(); }
16   catch (SomeError& e) { //reference, not value
17     e.print();
18   }
19   return 0;
20 }
```

5 / 20

6 / 20

Exceptions and local variables

- ▶ When an exception is thrown, the stack is unwound
- ▶ The destructors of any local variables are called as this process continues
- ▶ Therefore it is good C++ design practise to wrap any locks, open file handles, heap memory etc., inside a stack-allocated class to ensure that the resources are released correctly

7 / 20

Templates

- ▶ Templates support meta-programming, where code can be evaluated at compile-time rather than run-time
- ▶ Templates support generic programming by allowing types to be parameters in a program
- ▶ Generic programming means we can write one set of algorithms and one set of data structures to work with objects of any type
- ▶ We can achieve some of this flexibility in C, by casting everything to `void *` (e.g. `sort` routine presented earlier)
- ▶ The C++ Standard Template Library (STL) makes extensive use of templates

8 / 20

An example: a stack

- ▶ The stack data structure is a useful data abstraction concept for objects of many different types
- ▶ In one program, we might like to store a stack of `ints`
- ▶ In another, a stack of `NetworkHeader` objects
- ▶ Templates allow us to write a single generic stack implementation for an unspecified type `T`
- ▶ What functionality would we like a stack to have?
 - ▶ `bool isEmpty();`
 - ▶ `void push(T item);`
 - ▶ `T pop();`
 - ▶ ...
- ▶ Many of these operations depend on the type `T`

9 / 20

Creating a stack template

- ▶ A class template is defined as:

```
1 template<class T> class Stack {
2   ...
3 }
```
- ▶ Where `class T` can be any C++ type (e.g. `int`)
- ▶ When we wish to create an instance of a `Stack` (say to store `ints`) then we must specify the type of `T` in the declaration and definition of the object: `Stack<int> intstack;`
- ▶ We can then use the object as normal: `intstack.push(3);`
- ▶ So, how do we implement `Stack`?
 - ▶ Write `T` whenever you would normally use a concrete type

10 / 20

```
1 template<class T> class Stack {
2
3   struct Item { //class with all public members
4     T val;
5     Item* next;
6     Item(T v) : val(v), next(0) {}
7   };
8
9   Item* head;
10
11   Stack(const Stack& s) {} //private
12   Stack& operator=(const Stack& s) {} //
13
14 public:
15   Stack() : head(0) {}
16   ~Stack();
17   T pop();
18   void push(T val);
19   void append(T val);
20 };
```

11 / 20

```
1 #include "example16.hh"
2
3 template<class T> void Stack<T>::append(T val) {
4   Item **pp = &head;
5   while(*pp) {pp = &((*pp)->next);}
6   *pp = new Item(val);
7 }
8
9 //Complete these as an exercise
10 template<class T> void Stack<T>::push(T) { /* ... */ }
11 template<class T> T Stack<T>::pop() { /* ... */ }
12 template<class T> Stack<T>::~Stack() { /* ... */ }
13
14 int main() {
15   Stack<char> s;
16   s.push('a'), s.append('b'), s.pop();
17 }
```

12 / 20

Template details

- ▶ A template parameter can take an integer value instead of a type:
`template<int i> class Buf { int b[i]; ... };`
- ▶ A template can take several parameters:
`template<class T,int i> class Buf { T b[i]; ... };`
- ▶ A template can even use one template parameter in the definition of a subsequent parameter:
`template<class T, T val> class A { ... };`
- ▶ A templated class is not type checked until the template is instantiated:
`template<class T> class B {const static T a=3;};`
 - ▶ `B<int> b;` is fine, but what about `B<B<int>> > bi;`?
- ▶ Template definitions often need to go in a header file, since the compiler needs the source to instantiate an object

13 / 20

Default parameters

- ▶ Template parameters may be given default values

```
1 template <class T,int i=128> struct Buffer{
2   T buf[i];
3 };
4
5 int main() {
6   Buffer<int> B; //i=128
7   Buffer<int,256> C;
8 }
```

14 / 20

Specialization

- ▶ The `class T` template parameter will accept any type `T`
- ▶ We can define a specialization for a particular type as well:

```
1 #include <iostream>
2 class A {};
3
4 template<class T> struct B {
5   void print() { std::cout << "General" << std::endl; }
6 };
7 template<> struct B<A> {
8   void print() { std::cout << "Special" << std::endl; }
9 };
10
11 int main() {
12   B<A> b1;
13   B<int> b2;
14   b1.print(); //Special
15   b2.print(); //General
16 }
```

15 / 20

Templated functions

- ▶ A function definition can also be specified as a template; for example:

```
1 template<class T> void sort(T a[],
2                             const unsigned int& len);
```
- ▶ The type of the template is inferred from the argument types:
`int a[] = {2,1,3}; sort(a,3);` \implies `T` is an `int`
- ▶ The type can also be expressed explicitly:
`sort<int>(a)`
- ▶ There is no such type inference for templated classes
- ▶ Using templates in this way enables:
 - ▶ better type checking than using `void *`
 - ▶ potentially faster code (no function pointers)
 - ▶ larger binaries if `sort()` is used with data of many different types

16 / 20

```
1 #include <iostream>
2
3 template<class T> void sort(T a[], const unsigned int& len) {
4   T tmp;
5   for(unsigned int i=0;i<len-1;i++)
6     for(unsigned int j=0;j<len-1-i;j++)
7       if (a[j] > a[j+1]) //type T must support "operator">
8         tmp = a[j], a[j] = a[j+1], a[j+1] = tmp;
9 }
10
11 int main() {
12   const unsigned int len = 5;
13   int a[len] = {1,4,3,2,5};
14   float f[len] = {3.14,2.72,2.54,1.62,1.41};
15
16   sort(a,len), sort(f,len);
17   for(unsigned int i=0; i<len; i++)
18     std::cout << a[i] << "\t" << f[i] << std::endl;
19 }
```

17 / 20

Overloading templated functions

- ▶ Templated functions can be overloaded with templated and non-templated functions
- ▶ Resolving an overloaded function call uses the "most specialised" function call
- ▶ If this is ambiguous, then an error is given, and the programmer must fix by:
 - ▶ being explicit with template parameters (e.g. `sort<int>(...)`)
 - ▶ re-writing definitions of overloaded functions
- ▶ Overloading templated functions enables meta-programming:

18 / 20

Meta-programming example

```
1 #include <iostream>
2
3 template<unsigned int N> inline long long int fact() {
4     return N*fact<N-1>();
5 }
6
7 template<> inline long long int fact<0>() {
8     return 1;
9 }
10
11 int main() {
12     std::cout << fact<20>() << std::endl;
13 }
```

19 / 20

Exercises

1. Provide an implementation for:
`template<class T> T Stack<T>::pop();` and
`template<class T> Stack<T>::~Stack();`
2. Provide an implementation for:
`Stack(const Stack& s);` and
`Stack& operator=(const Stack& s);`
3. Using meta programming, write a templated class `prime`, which evaluates whether a literal integer constant (e.g. 7) is prime or not at compile time.
4. How can you be sure that your implementation of class `prime` has been evaluated at compile time?

20 / 20