

# Compiler Construction

## Lent Term 2014

### Lecture 14

- **Slang.3 language (subset of SPL's L3)**
- **VSM.2 : Stack machine with heap**
- **Examples**

**Timothy G. Griffin**  
[tgg22@cam.ac.uk](mailto:tgg22@cam.ac.uk)  
**Computer Laboratory**  
**University of Cambridge**

1

## The Source : Slang.3 = an enhanced subset of L3

From Semantics of Programming Languages:

Types:

$T ::= \text{int} \mid \text{bool} \mid \text{unit} \mid T_1 \rightarrow T_2 \mid T_1 * T_2 \mid T_1 + T_2 \mid \{\text{lab}_1:T_1, \dots, \text{lab}_k:T_k\} \mid T \text{ ref}$

Expressions

$e ::= n \mid b \mid e_1 \text{ op } e_2 \mid \text{if } e_1 \text{ then } e_2 \text{ else } e_3 \mid$   
 $e_1 := e_2 \mid \text{let } e \text{ ref } e \mid \ell \mid$   
 $\text{skip} \mid e_1; e_2 \mid$   
 $\text{while } e_1 \text{ do } e_2 \mid$   
 $\text{fn } x:T \Rightarrow e \mid e_1 \text{ e}_2 \mid x \mid$   
 $\text{let val } x:T = e_1 \text{ in } e_2 \text{ end} \mid$   
 $\text{let val rec } x:T_1 \rightarrow T_2 = (\text{fn } y:T_1 \Rightarrow e_1) \text{ in } e_2 \text{ end} \mid$   
 $(e_1, e_2) \mid \#1 e \mid \#2 e \mid$   
 $\text{inl } e:T \mid \text{inr } e:T \mid$   
 $\text{case } e \text{ of } \text{inl } (x_1:T_1) \Rightarrow e_1 \mid \text{inr } (x_2:T_2) \Rightarrow e_2 \mid$   
 $\{\text{lab}_1 = e_1, \dots, \text{lab}_k = e_k\} \mid \#\text{lab } e$

Not implemented : records, disjoint union, tuples  
(left as exercises for you ...)

## Slang.3 Examples

slang3/examples/rem2.slang

```
%  
% m = (m div n) * n + rem(m, n)  
%  
% Like rem1.slang, but this version tests that 0 < n.  
%  
fun rem (m : int, n : int) : int =  
    fun aux(m: int) : int = if (m >= n) then aux(m - n) else m  
    in  
        if (n >= 1) then aux(m) else 0  
    end  
in  
    let x1 : int = read()  
    in let x2 : int = read()  
        in  
            print(rem(x1, x2))  
        end  
    end  
end
```

## Slang.3 Examples

slang3/examples/counter.slang

```
fun mk_counter (i : int) : unit -> int =  
    let c : int ref = ref (i)  
    in fun inc () : int =  
        let x : int = !c  
        in (c := !c + 1; x) end  
        in inc end  
    end  
in  
    let v : int = read()  
    in let g : unit -> int = mk_counter (v)  
        in  
            (print (v);  
             print (g());  
             print (g());  
             print (g());  
             print (g()))  
        end  
    end  
end
```

## Slang.3 Concrete Syntax

```

E ::= A
| while E do E end
| fn ID : T => E end
| if E then E else E
| let ID : T = E in E end
| fun ID ( PL ) : T = E in E end
| fun ID () : T = E in E end

A ::= ID | true | false | n | skip | ( E ) | ( S1 )
| A () | A (EL) | !A | ref A | not A | -A
| A + A | A - A | A * A | A = A | A >= A | A := A

S1 ::= E ; S2

S2 ::= E ; S1 | E

EL ::= E, EL | E

PL ::= ID : T | ID : T, PL

PT ::= T * T | T * PT

T ::= ( T ) | int | unit | bool | T -> T | (PT) -> T | T ref

```

Some modifications:  
 Add "end" to while and fn.  
 Drop "val" and "rec".  
 Functions have 0 or more arguments.

## Slang.3 Abstract Syntax

```


type var = string
datatype oper = Plus | Mult | Subt | GTEQ | EQ
datatype unary_oper = Neg | Not

datatype type_expr =
    TEint
| Teref of type_expr
| TEunit
| Tbool
| Tfunc of (type_expr list) * type_expr


datatype expr =
    Skip
| Integer of int
| Boolean of bool
| UnaryOp of unary_oper * expr
| Op of expr * oper * expr
| Assign of expr * expr
| Deref of expr
| Ref of expr
| Seq of expr * expr
| If of expr * expr * expr
| While of expr * expr
| Var of var
| Fn of var * type_expr * expr * (type_expr option)
| App of expr * expr list
| Let of var * type_expr * expr * expr
| Letrec of var * (var * type_expr) list * type_expr * expr * expr

```

## Target: VSM.2

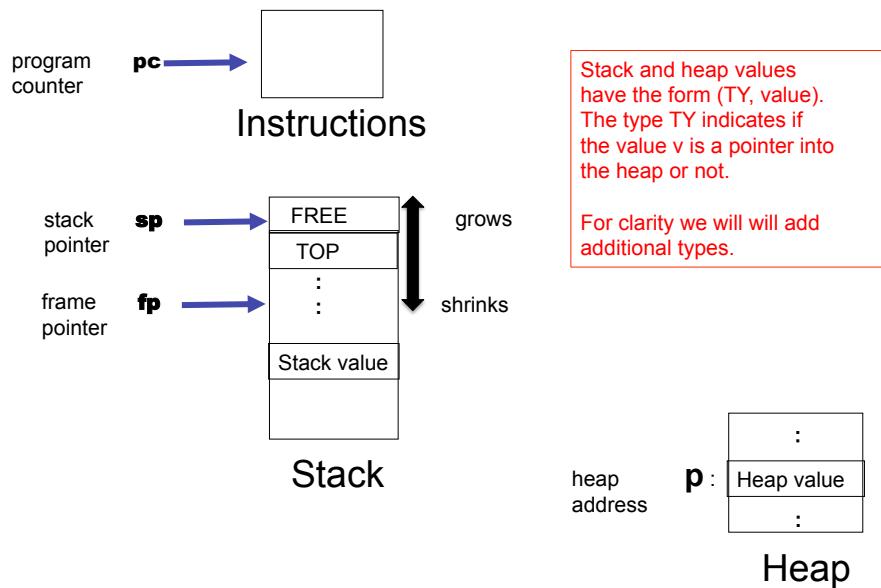


## Stack and Heap Types

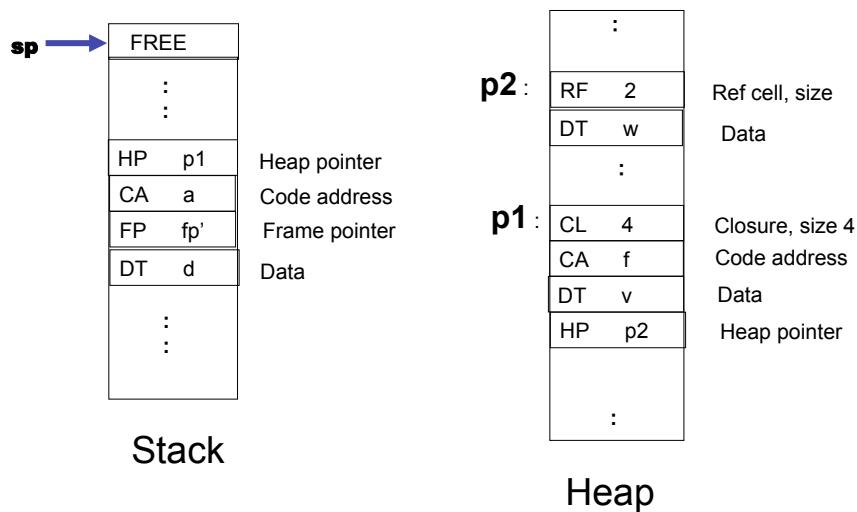



Again: only “one bit” really needed for types (pointer/not pointer).

## Recall : VSM Call Stack

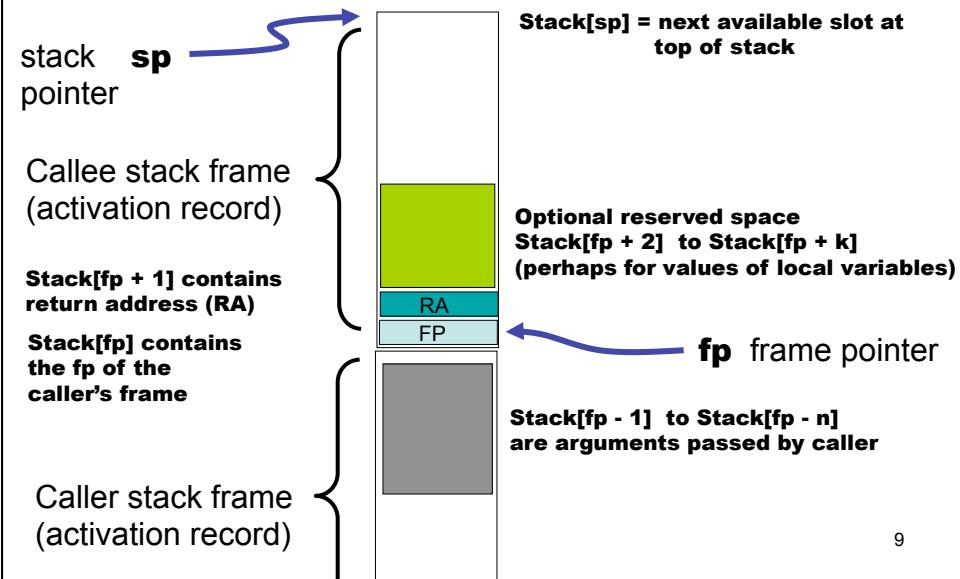

## Calling a “known function” f

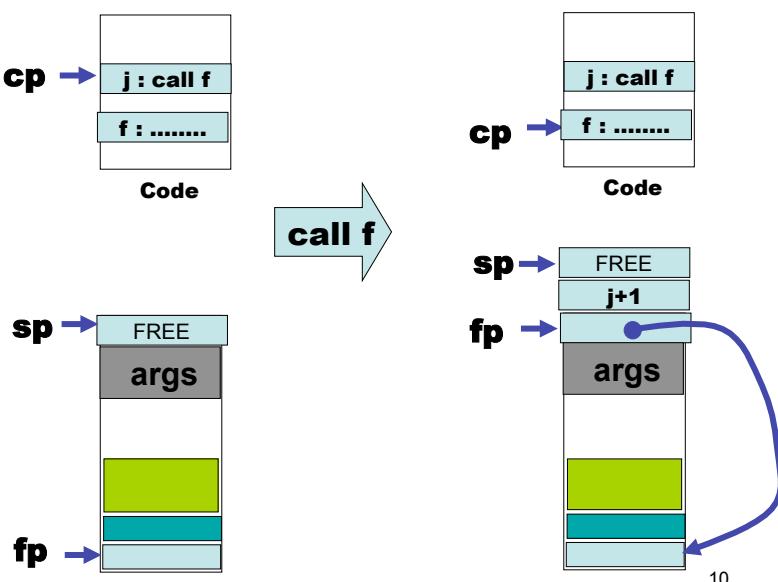

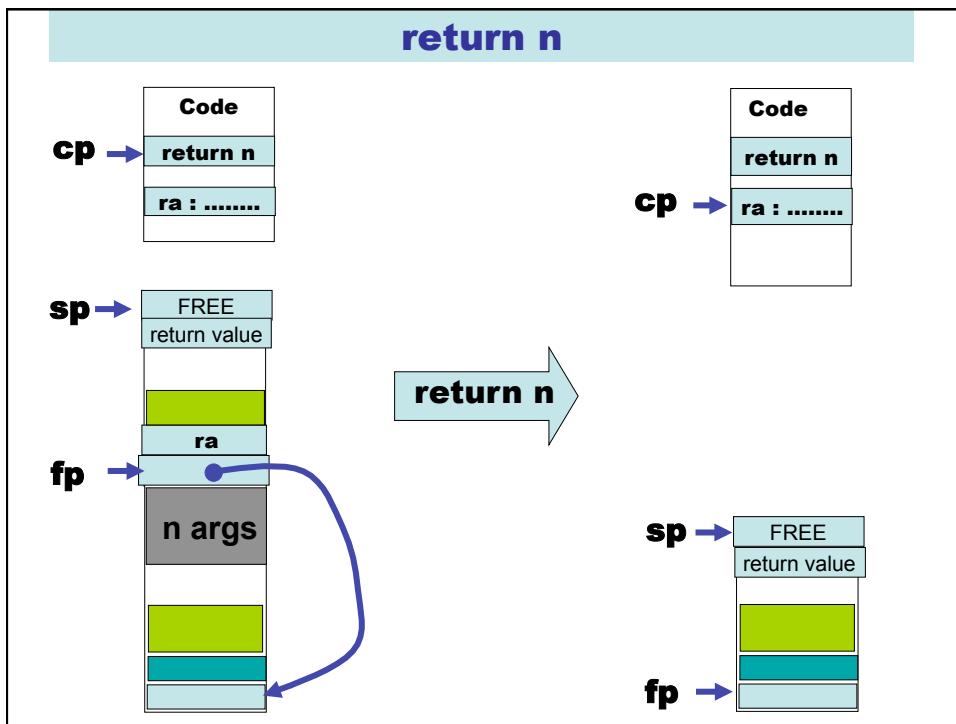

### Why is “one bit” needed?


It may be that most functions are not closures, but are “known” at compile time. We don’t want to pay the overhead of “closures on the heap” for all functions/procedures.

How can we compile the following expression?


e(e1, e2)

We do not know until run-time the result of evaluating e will require a “normal” function call or a call through a closure on the heap.


### callc k (CASE 1)

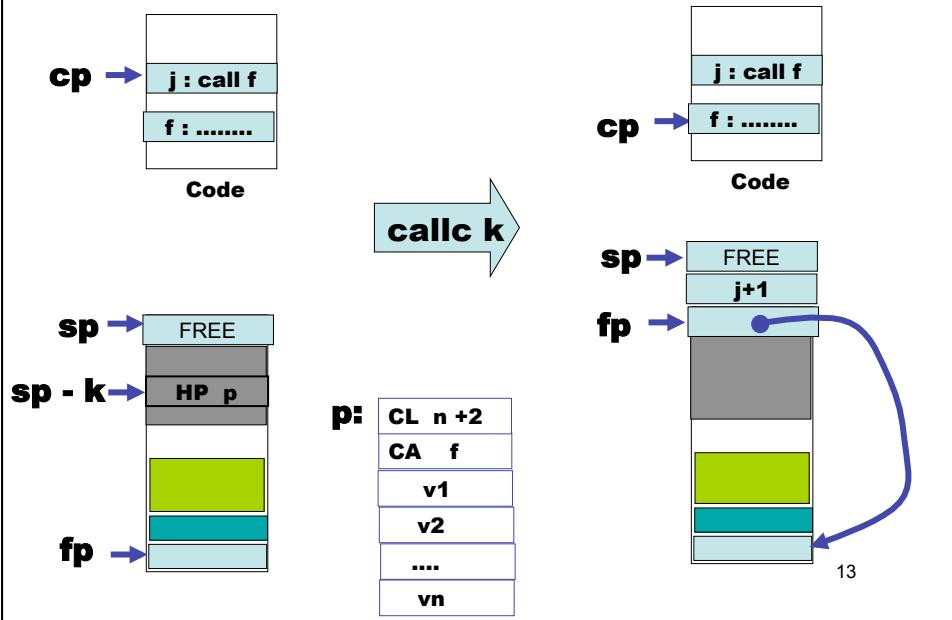


### callc k (CASE 2)

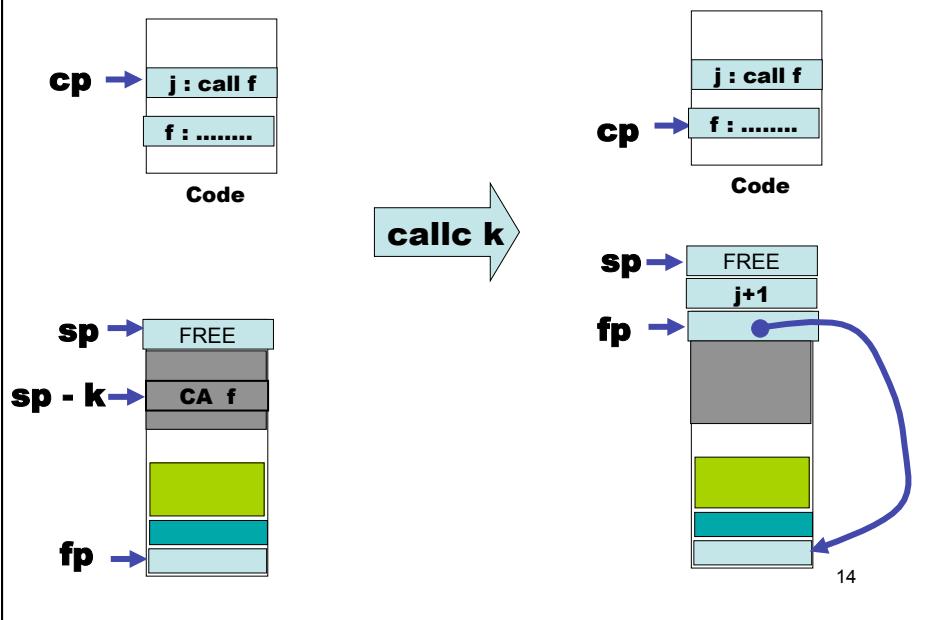

## push c, pushfun f


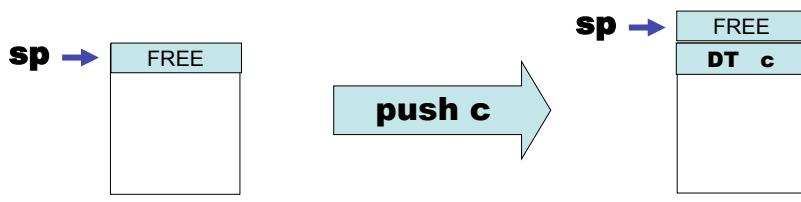


## closure g k


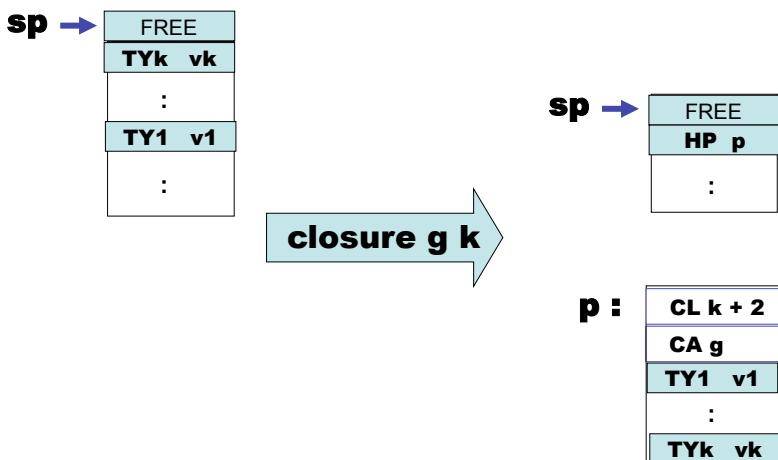


**p = first free  
in heap**


**p + k + 2 =  
first free in heap**

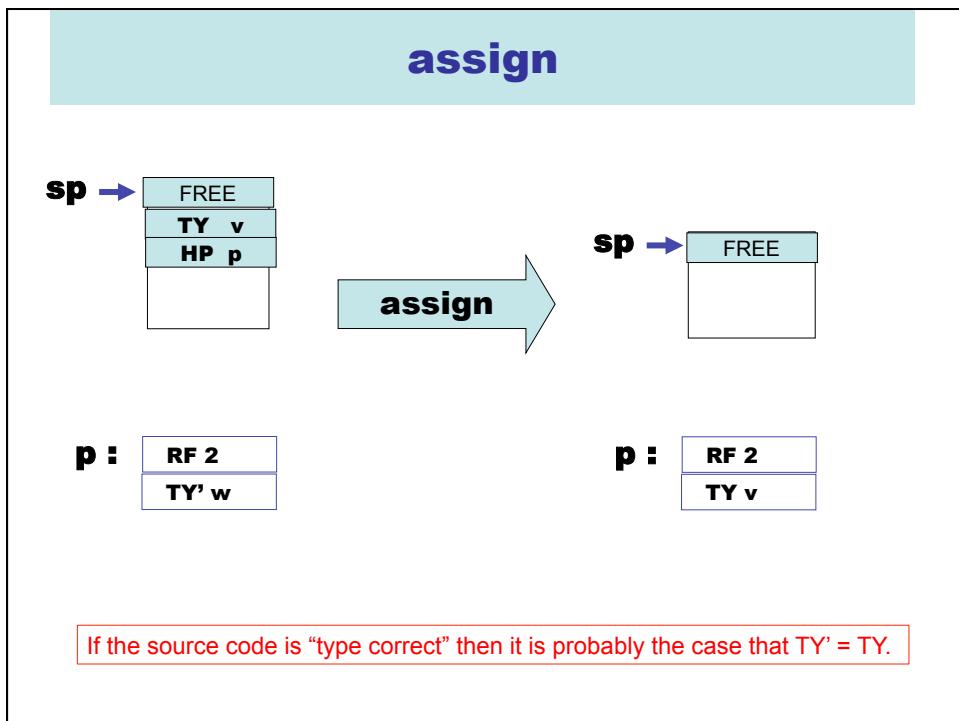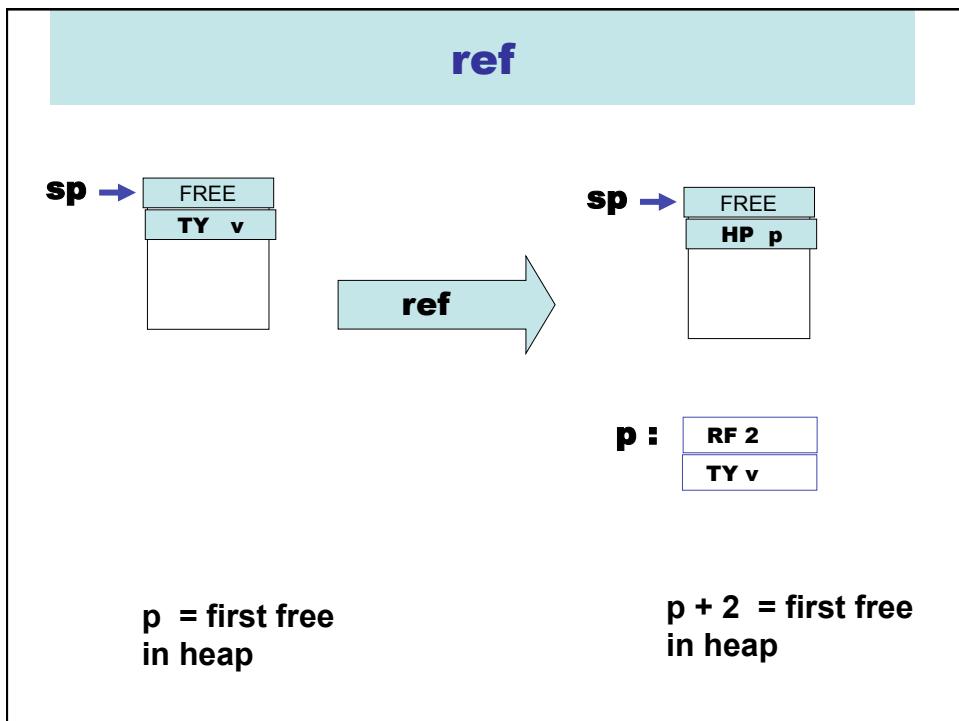

## deref k





deref k

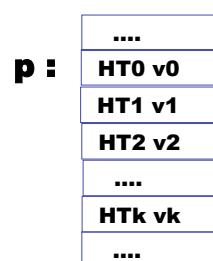

Will use the same  
operation to deref a ref  
cell and a closure.

In Heap

## arg k

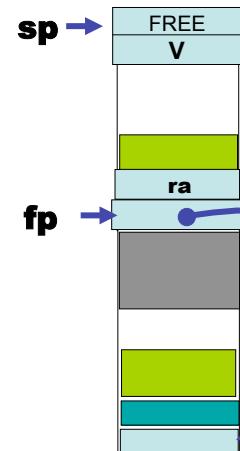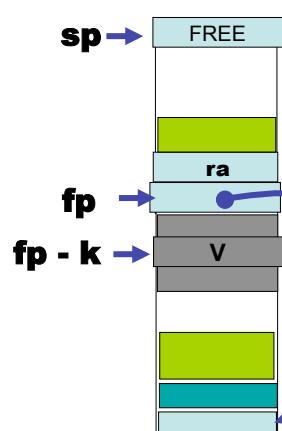

arg k

## AST\_vsm\_assembler.sml

```
type offset = int
type label = string
type constant = int

datatype vsm_operation =
  VSM_Comment of string          (* Comment string *)
  | VSM_Label of label           (* symbolic location (code address) *)
  | VSM_Nop                      (* do nothing *)
  | VSM_Push of constant         (* push a simple data value *)
  | VSM_PushFun of label         (* push a function/procedure address *)
  | VSM_Arg_Load of offset       (* push value at fp - offset *)
  | VSM_AllocateLocals of int    (* allocate stack space for local values *)
  | VSM_Load of offset           (* push local value at fp + offset *)
  | VSM_Store of offset          (* pop top to fp + offset *)
  | VSM_Pop                      (* pop top of stack *)
  | VSM_Add                      (* replace top 2 values with sum *)
  | VSM_Sub                      (* replace top 2 values with difference *)
  | VSM_Mul                      (* replace top 2 values with product *)
  | VSM_Hlt                      (* stop the machine, I want to get off *)
  | VSM_Jmp of label             (* jump to label *)
  | VSM_Ifz of label             (* jump to label if top is zero, pop *)
  | VSM_Ifp of label             (* jump to label if top is positive, pop *)
  | VSM_Ifn of label             (* jump to label if top is negative, pop *)
  | VSM_Pri                      (* print stack-top, then pop it *)
  | VSM_Rdi                      (* read integer from stdin, push it *)
  | VSM_Assign                   (* assign via pointer to ref cell in heap *)
  | VSM_Deref of int              (* replace top with dereferenced value *)
  | VSM_Ref                       (* create ref cell on heap *)
  | VSM_Call of label            (* call known function *)
  | VSM_Call_Closure of int      (* call closure *)
  | VSM_Return of int             (* return and clear args off stack *)
  | VSM_Closure of label * int   (* allocate closure on heap, push pointer *)
```

## command-line

- **slang3 -vsm examples/file.slang**  
compile file.slang to VSM.2 to binary object  
file examples/file.vrmo
- **slang3 examples/file.slang**  
same as above (VSM.2 is the default)
- **slang3 -v examples/file.slang**  
same as above, but with verbose output at  
each stage of compilation

- **vsm2 examples/file.vsmo**  
run VSM.0 on bytecode file
- **vsm2 -v examples/file.vsmo**  
same as above, but with verbose output
- **vsm2 -s examples/file.vsmo**  
just print the bytecode

## Mind The Gap

L3

Type-checked Abstract Syntax Tree (AST)

L3

Alpha converted (all bound variables made unique)

IR1

Closure converted. All functions/procedures at top-level.

IR2

High-level control removed (“almost flattened”).  
Can now target either register-oriented or stack-oriented machine.

VSM

Target VSM. Fully flattened.

## Alpha Conversion of rem2.slang

```
fun _1_rem (_2_m:int, _3_n:int) : int =
  fun _4_aux (_5_m:int) : int =
    if (_5_m >= _3_n) then _4_aux ((_5_m - _3_n)) else _5_m
    in
      if (_3_n >= 1) then _4_aux (_2_m) else 0
    end
  in
    let _6_x1 : int = read()
    in let _7_x2 : int = read()
      in
        print(_1_rem(_6_x1, _7_x2))
      end
    end
  end
```

Later stages of compiler will not have to worry about name clashes.

Variable X is transformed to  $_n_X$  for some  $n$ .  
(The variable name X is preserved to enhance debugging ....).

We could have used *De Bruijn indices* ...

## IR1

```

datatype var_kind =
  IR1_ArgVar of var
  | IR1_Letvar of var
  | IR1_Envvar of var * int

datatype expr =
  IR1_Skip
  | IR1_Var of var_kind
  | IR1_KnownFun of var
  | IR1_Integer of int
  | IR1_Boolean of bool
  | IR1_UnaryOp of unary_oper * expr
  | IR1_Op of expr * oper * expr
  | IR1_Assign of expr * expr
  | IR1_Deref of expr
  | IR1_Ref of expr
  | IR1_Ref of expr
  | IR1_Seq of expr * expr
  | IR1_If of expr * expr * expr
  | IR1_While of expr * expr
  | IR1_App of expr * expr list
  | IR1_Closure of var * (var_kind list)
  | IR1_Let of var * expr * expr

datatype ir0_function = IR1_Letrec of var * (var list) * expr
type program = expr * (ir0_function list)

```

## Example of L3 to IR1 translation

```

fun _1_rem (_2_m:int, _3_n:int ) : int =
  fun _4_aux (_5_m:int ) : int =
    if (_5_m >= _3_n) then _4_aux ((_5_m - _3_n)) else _5_m
    in if (_3_n >= 1) then _4_aux (_2_m) else 0 end
  in let _6_x1 : int = read ()
    in let _7_x2 : int = read ()
      in print (_1_rem (_6_x1, _7_x2)) end
    end
  end

```

rem2.slang

```

let _6_x1 = KNOWN(read) ()
in let _7_x2 = KNOWN(read) ()
  in KNOWN(print) (KNOWN(_1_rem) (_6_x1, _7_x2)) end
end

fun _1_rem (_2_m, _3_n ) =
  let _9_CL = CLOSURE(_4_aux, [_3_n])
  in if (_3_n >= 1) then _9_CL (_2_m) else 0 end;

fun _4_aux (_8_ENV, _5_m ) =
  if (_5_m >= _8_ENV[1])
  then KNOWN(_4_aux) (_8_ENV, (_5_m - _8_ENV[1]))
  else _5_m;

```